


Proposed Main Menu Board



- 5' 11 1/2" tall
- 4' 10" wide
- 19.97 sq. ft. in display area

Proposed Pre-Browse Board

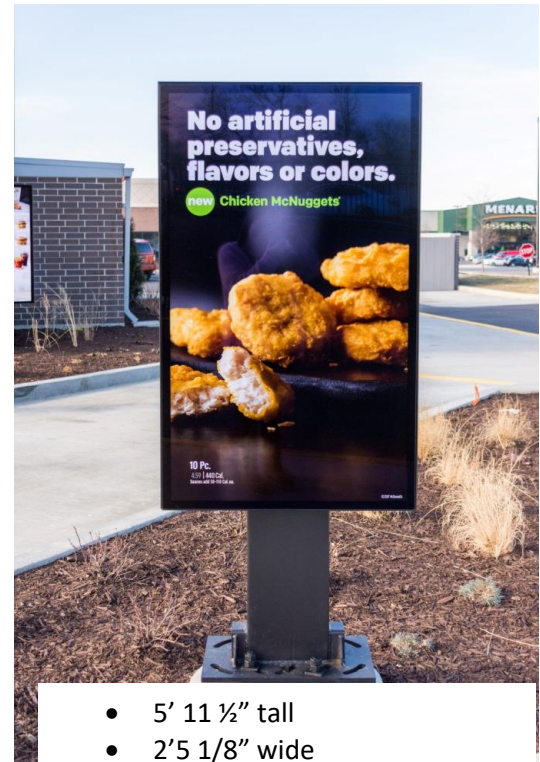


- 5' 11 1/2" tall
- 2' 5 1/8" wide
- 9.98 sq. ft. in display area

Current Menu Board



- 6' 9.35 " tall
- 8' 7.46" wide
- 38.8 sq. ft. in display area


Current Drive-Thru

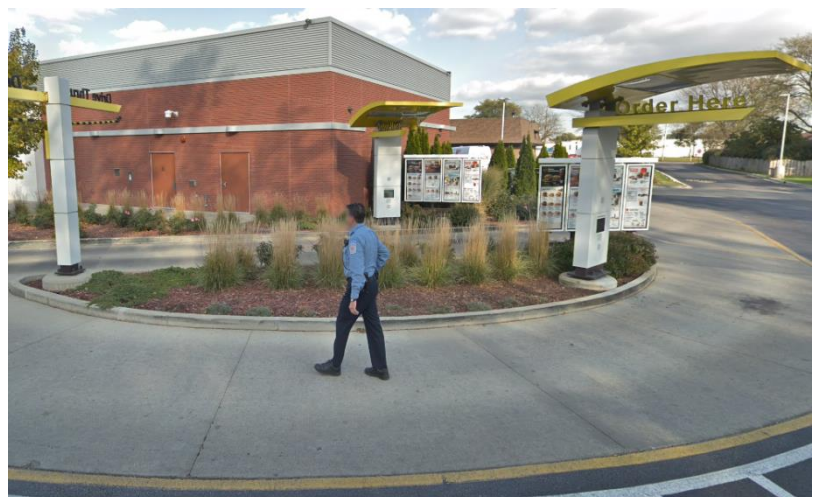



EXISTING MENU BOARD

RECEIVED  
SEP 27 2019  
CLINTON COUNTY  
SHERIFF'S DEPARTMENT

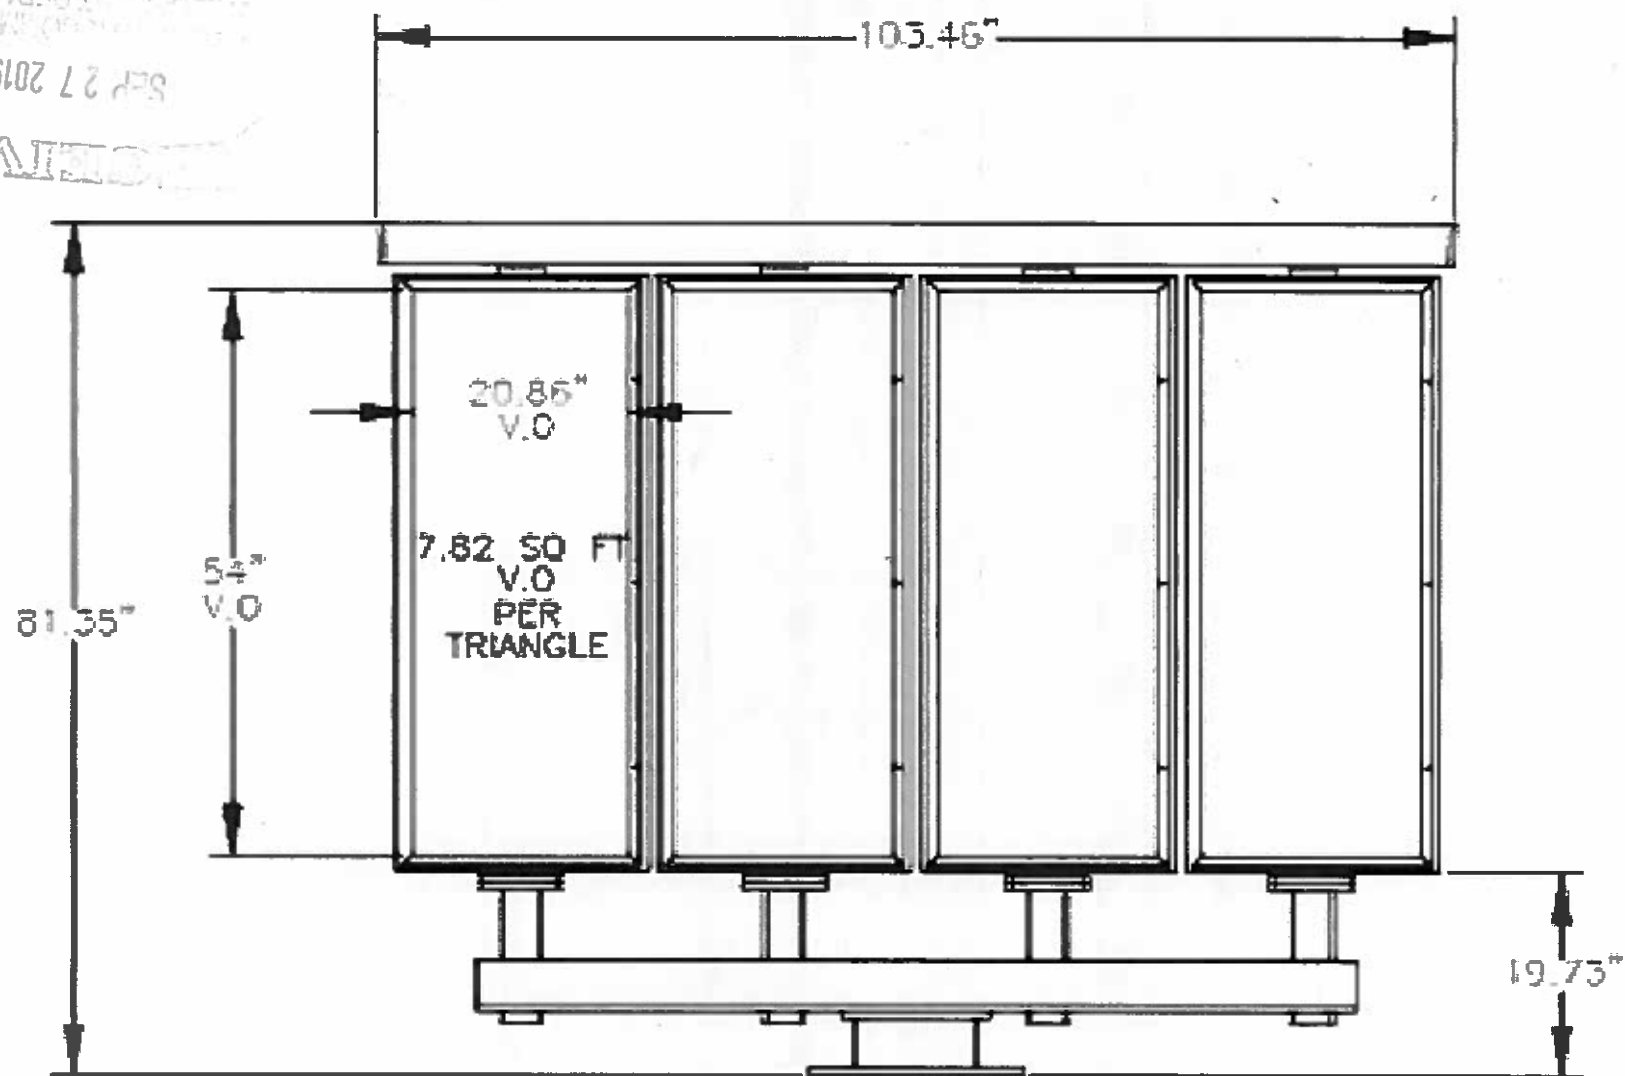

OVERALL FRONT FOOTPRINT OF OPO4

58.45 SQ FT

EXISTING MENU BOARD



**No artificial flavors,  
preservatives or colors**



10 pc. Chicken  
McNuggets®

**Lunchtime  
powerhouse**



Big Mac®

**Hot and  
deliciously juicy**

100% fresh beef



Quarter Pounder™  
with Cheese

Double Quarter Pounder™  
with Cheese

**PROPOSED ELECTRONIC  
PRE-SELL MENU BOARD**













Customers With Speech or Hearing Difficulties Please Pull Up To The Next Open Window For Assistance In Ordering.


Clientes con dificultades auditivas o del habla favor de pasar a la oficina ventanilla abierta para ayudarlos con su orden.

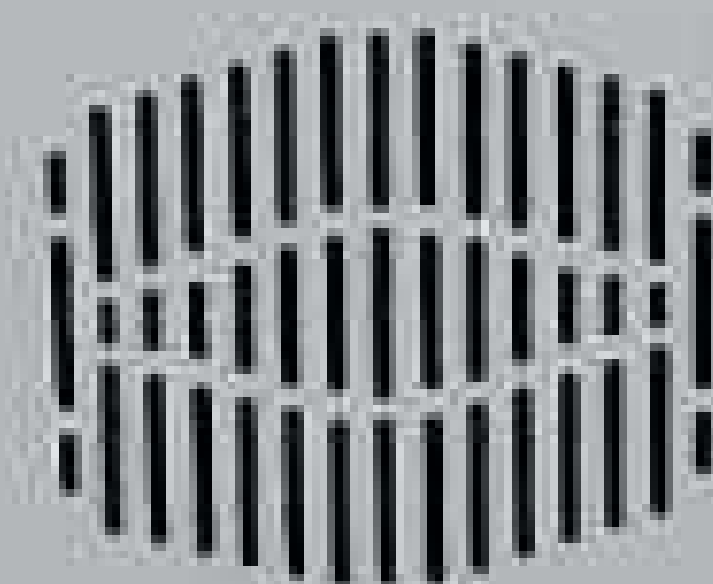

EXISTING ORDER SPEAKER  
TO REMAIN



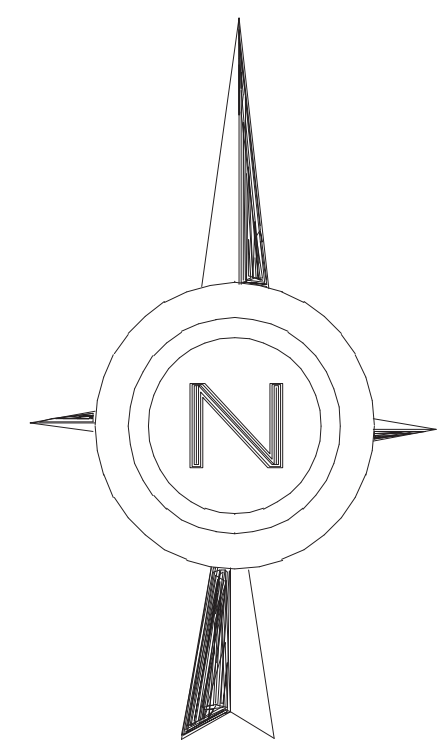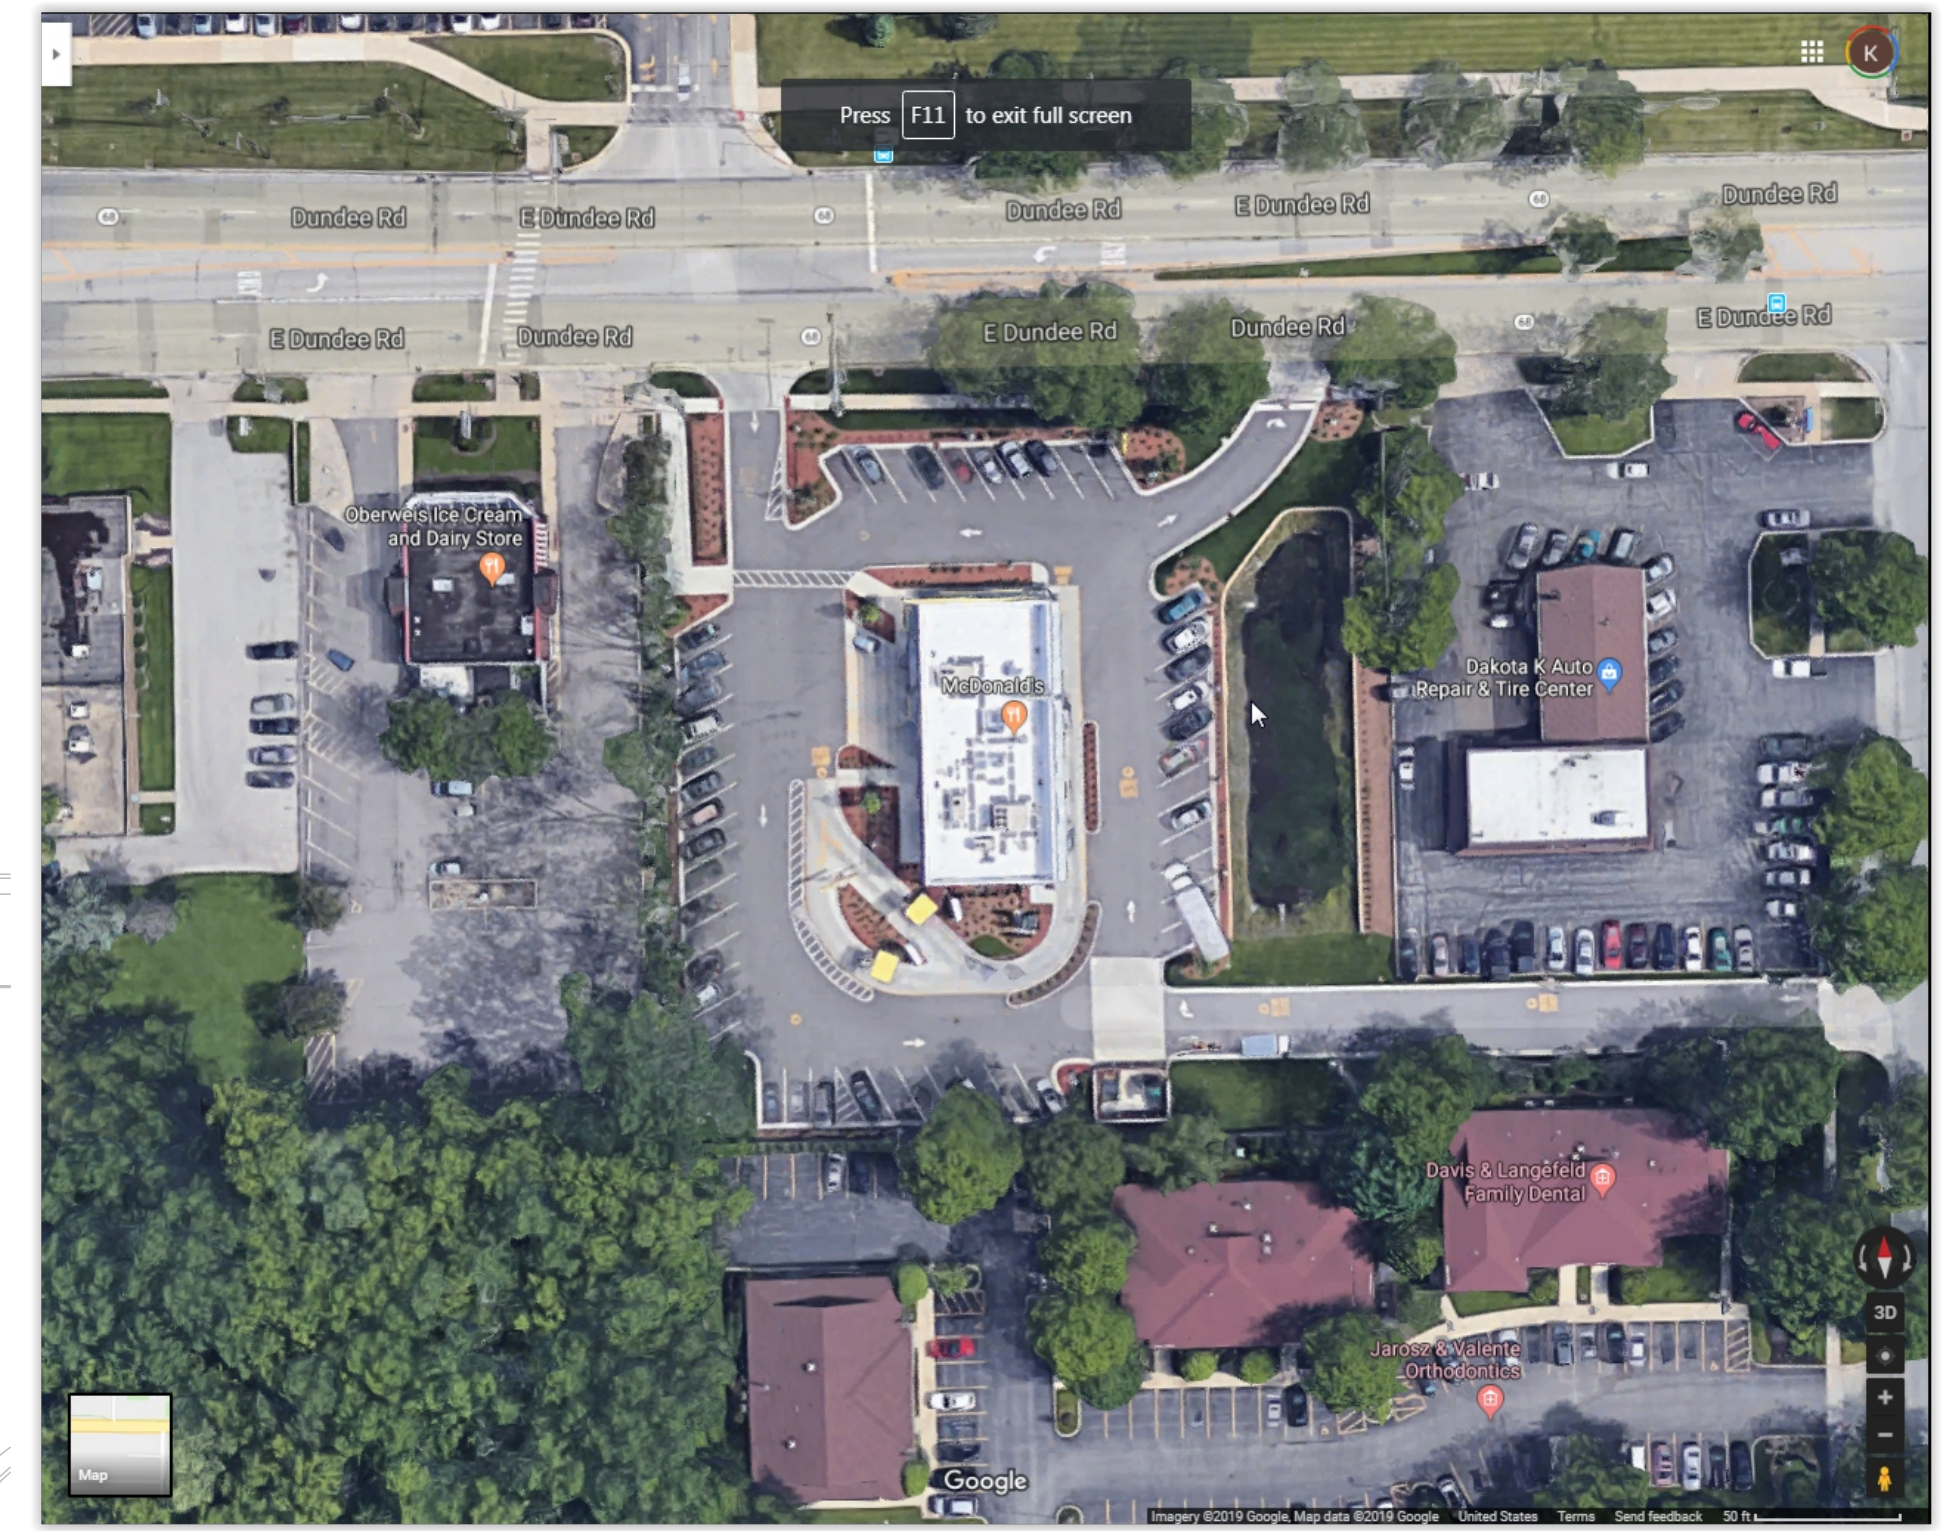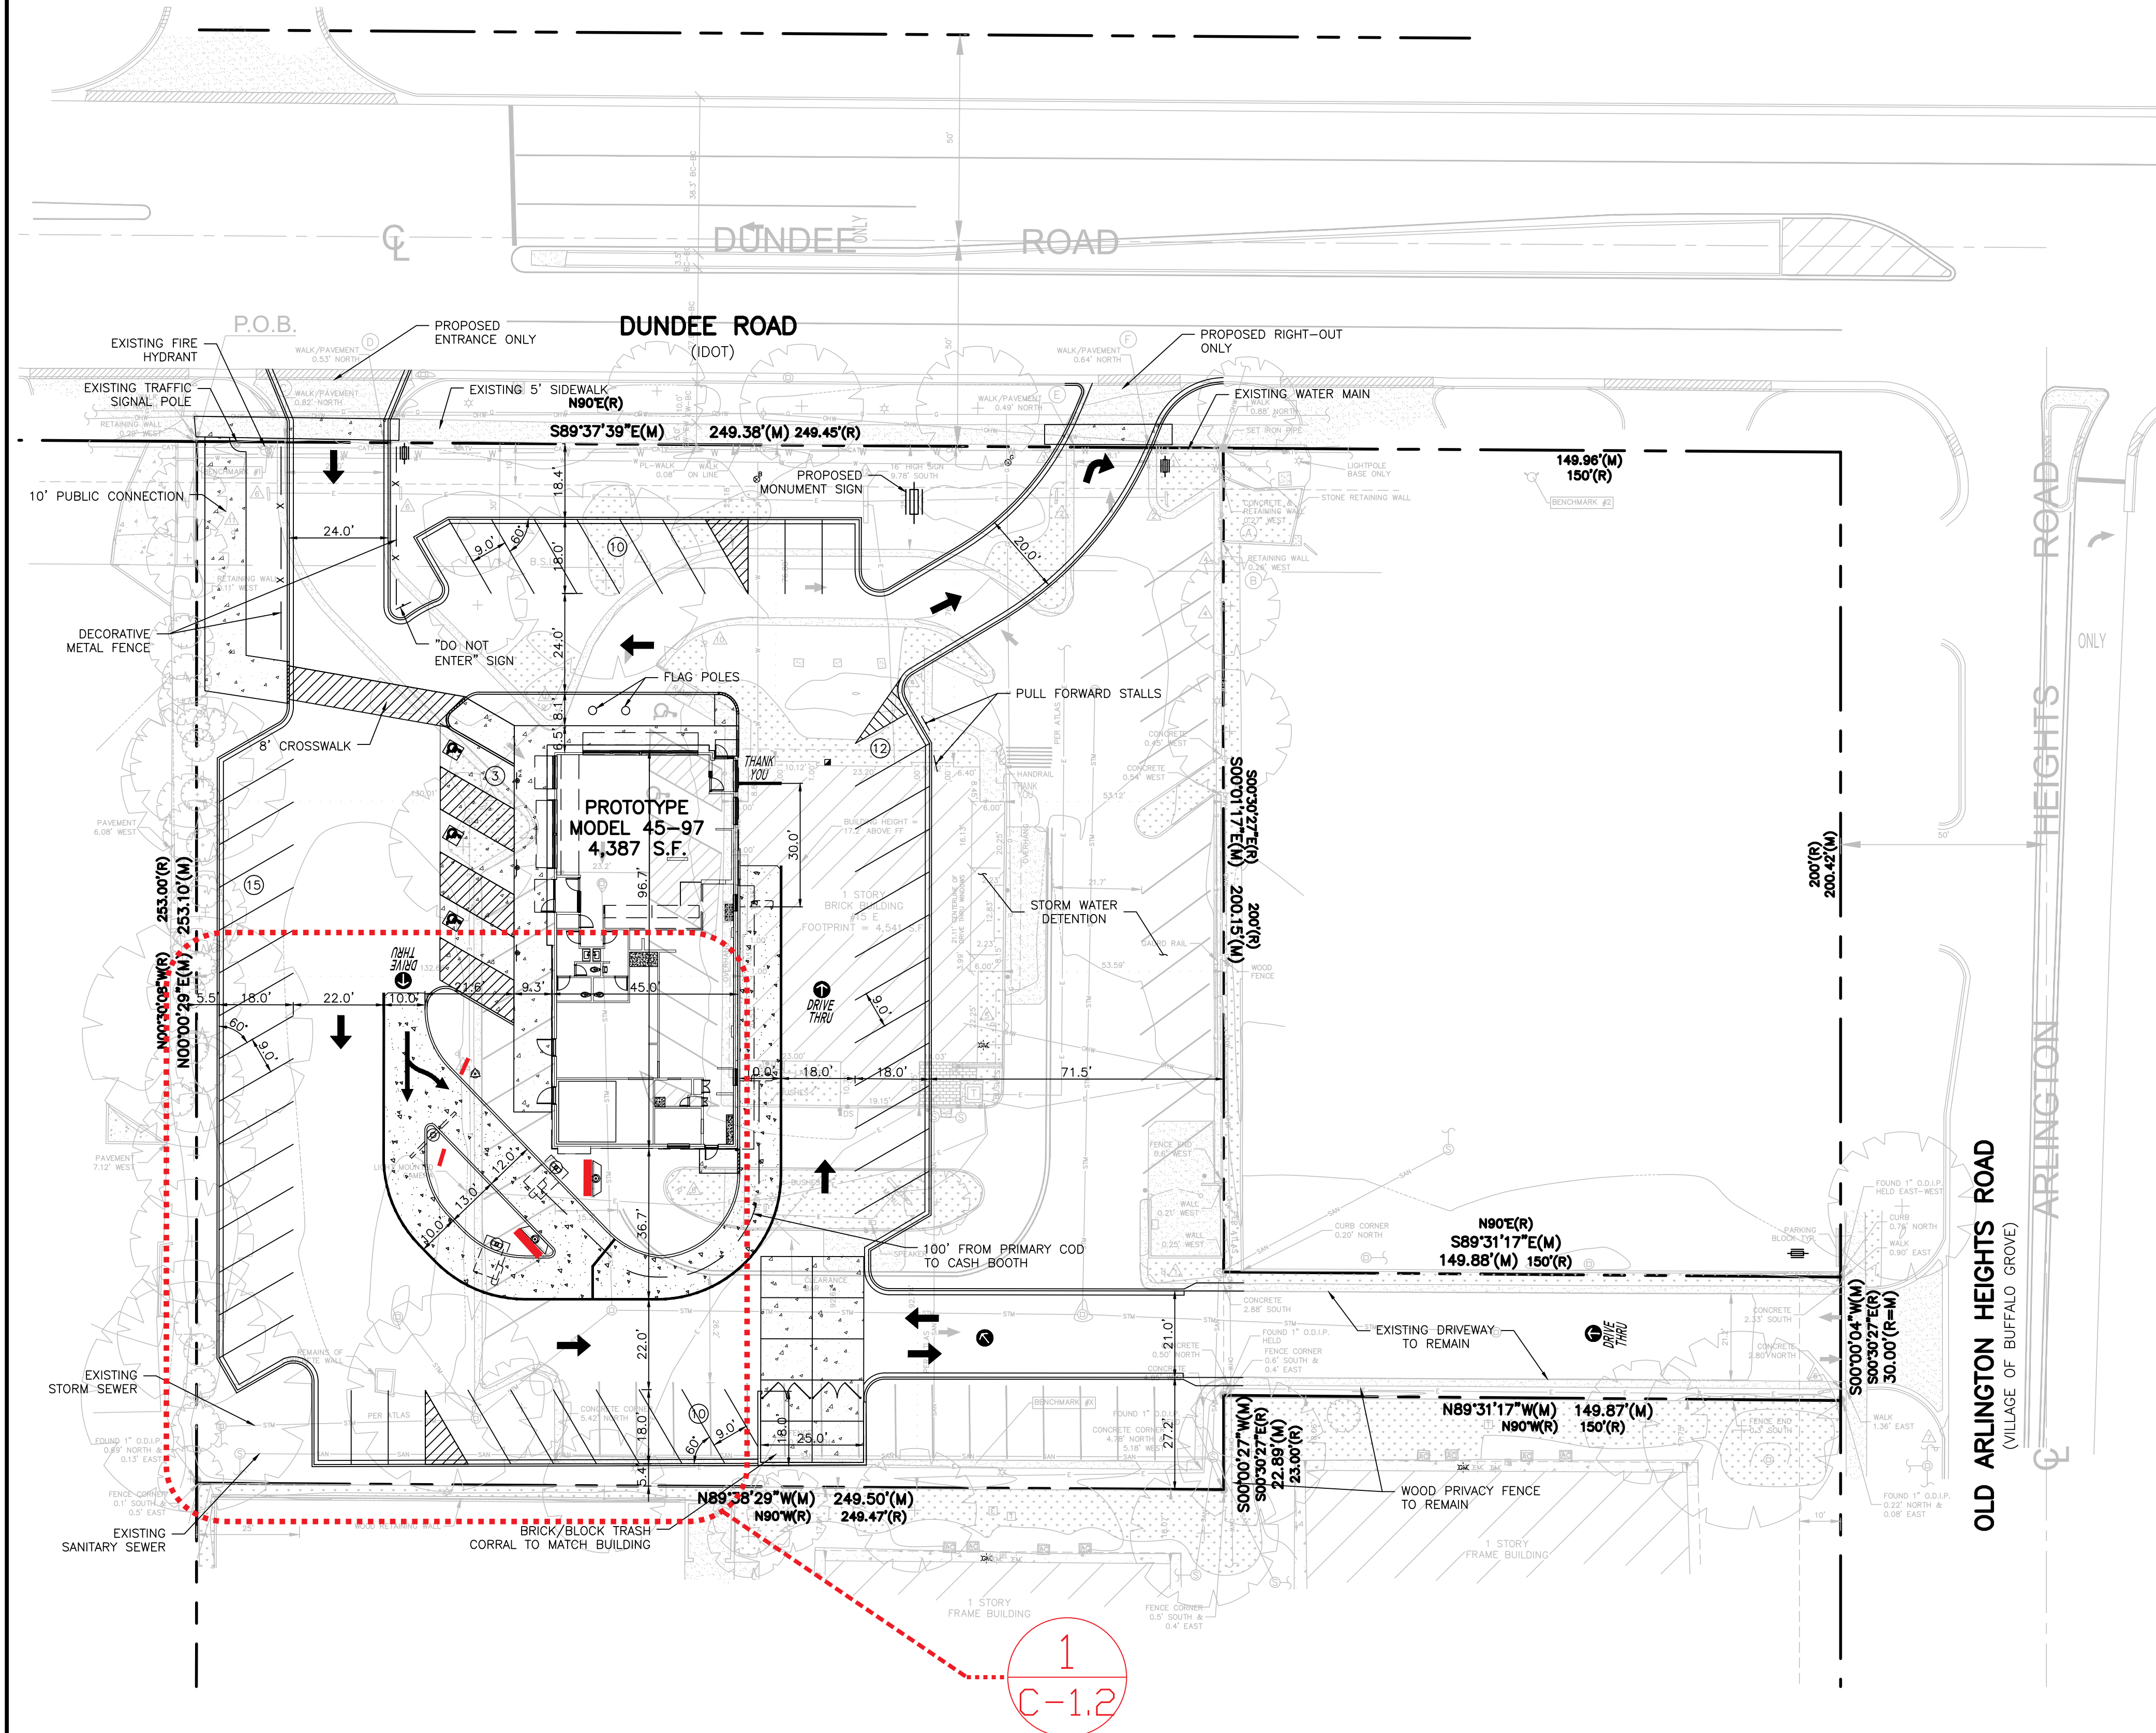

|                |              |                         |  |                          |     |         |
|----------------|--------------|-------------------------|--|--------------------------|-----|---------|
| <div>C-1</div> | CHECKED BY:  | <div>Prepared By:</div> | <div><div>McDONALD'S</div><div>McDonald's</div></div> | <div>Prepared For:</div> | NO. | DATE    |
|                | DESIGN BY:   |                         |  |                          | 1   | 5-14-19 |
|                | DRAWN BY:    |                         |  |                          |     |         |
|                | DATE:        |                         |  |                          |     |         |
|                | SCALE:       |                         |  |                          |     |         |
|                | PROJECT NO.: |                         |  |                          |     |         |
|                |              |                         |  |                          |     |         |
|                |              |                         |  |                          |     |         |
|                |              |                         |  |                          |     |         |
|                |              |                         |  |                          |     |         |
|                |              |                         |  |                          |     |         |




BUILDING/ELECTRICAL/MECHANICAL COMMENTS:

MENU BOARD IS ELECTRIFIED, USING EXISTING DEDICATED 20AMP CIRCUIT FOR EACH D/T LANE AN WILL HAVE ISOLATED GROUNDS.

CONDUIT: EXISTING TO HOME RUN IS 2". NEW FEEDER WILL BE 3/4" FOR LINE VOLTAGE. ALL CONDUIT EXISTING WILL BE SCHEDULE 40PVC UNDERGROUND.

LINE VOLTAGE WIRING: 4#12 &1312 GND &1#12 ISOLATED GND TO EXISTING PANEL FOR ISOLATED GROUND POWER TO MENU BOARDS

LOW VOLTAGE CABLING: CAT-6 OUTDOOR & UNDERGROUND RATED BELKIN CABLING TO EXISTING NETWORK DATE SWITCH FOR COMMUNICATION TO MENU BOARDS.

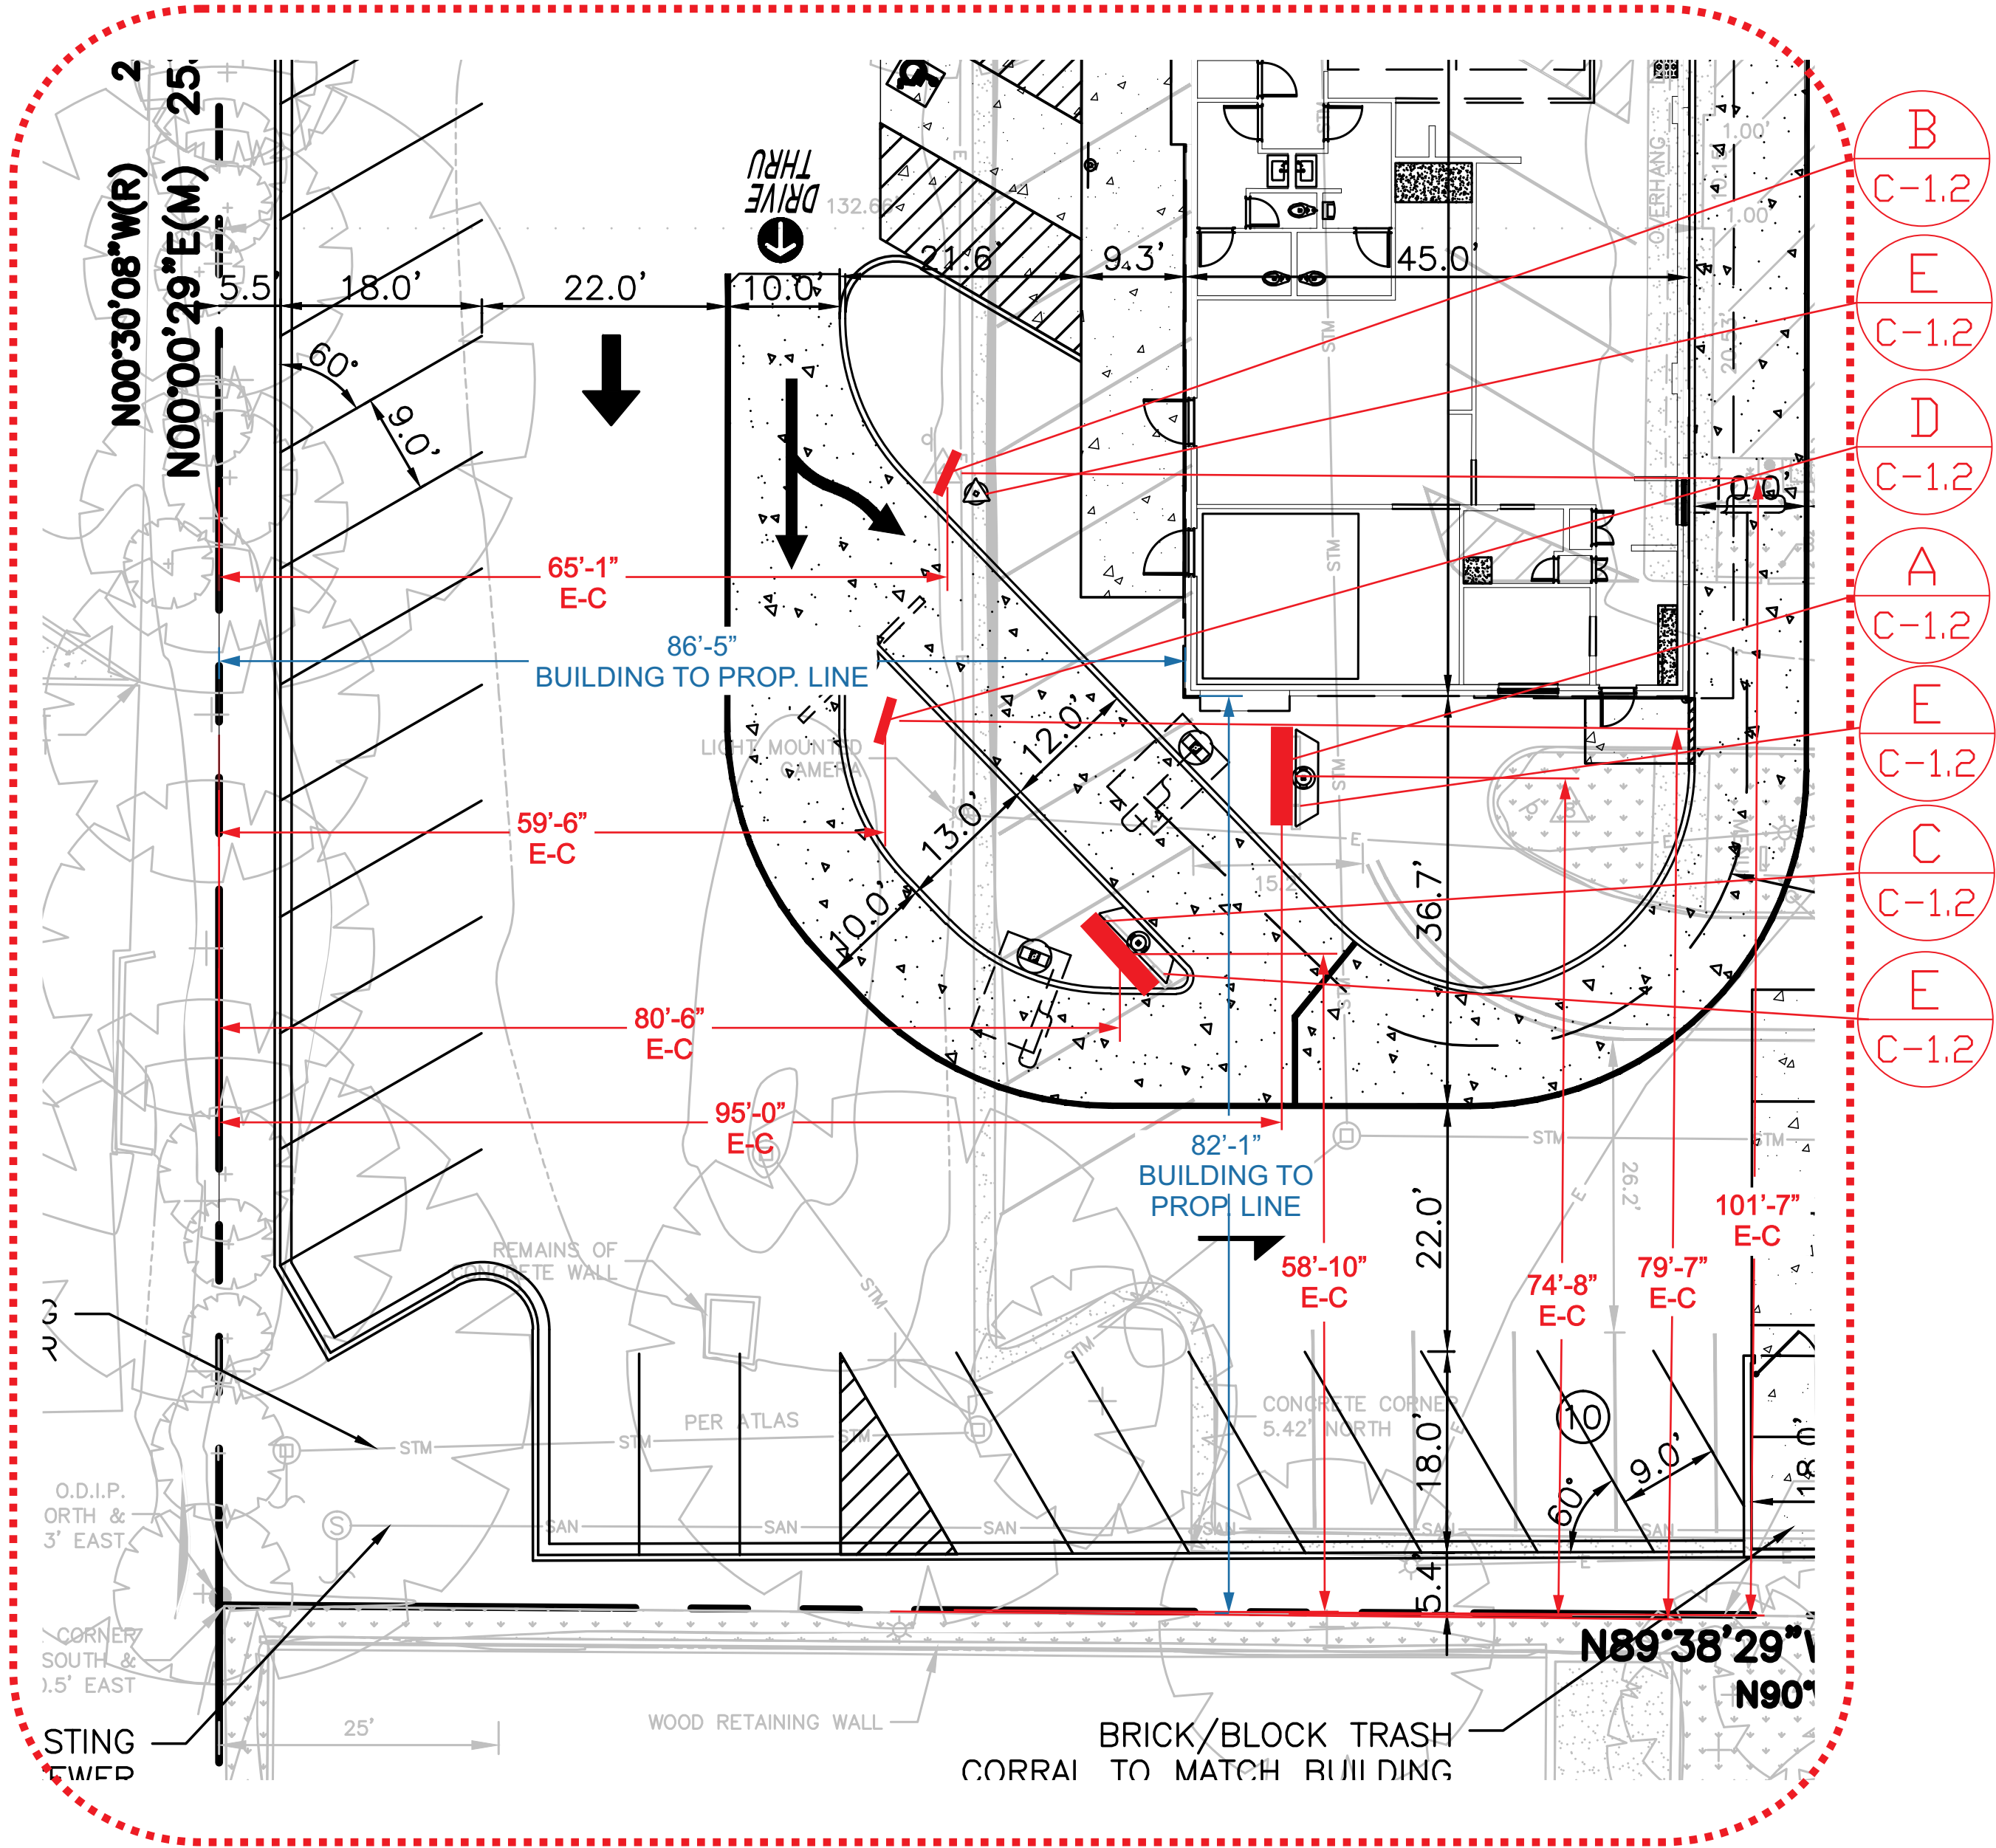

1 Drive Thru Order Point  
SCALE: N.T.S

A) NEW LANE 1 MENU BOARD INSTALLATION-REMOVE OLD BOARD  
SCREEN DIMS: 4'-10"W x 4'-1 5/8"H x 1'-1 1/2"D  
TOTAL BOARD HEIGHT (WITH BASE): 5'-11 5/8"H  
MINIMUM SETBACK FROM PUBLIC WAY: 40'  
NEW SCREEN SQUARE FOOTAGE: 20'  
OLD SCREEN SQUARE FOOTAGE: 43'  
**Double Screen**

B) NEW LANE 1 PRESELL INSTALLATION-REMOVE EXISTING PRESELL  
SCREEN DIMS: 2'-5"W x 4'-1 3/4"H x 1'-1 13/16"D  
TOTAL BOARD HEIGHT (WITH BASE): 5'-11 1/2"H  
MINIMUM SETBACK FROM PUBLIC WAY: 40'  
NEW SCREEN SQUARE FOOTAGE: 10'  
**Single Screen**


C) NEW LANE 2 MENU BOARD INSTALLATION-REMOVE OLD BOARD  
SCREEN DIMS: 4'-10"W x 4'-1 5/8"H x 1'-1 1/2"D  
TOTAL BOARD HEIGHT (WITH BASE): 5'-11 5/8"H  
MINIMUM SETBACK FROM PUBLIC WAY: 40'  
NEW SCREEN SQUARE FOOTAGE: 20'  
OLD SCREEN SQUARE FOOTAGE: 43'  
**Double Screen**

D) NEW LANE 2 PRESELL INSTALLATION-NO EXISTING PRESELL  
SCREEN DIMS: 2'-5"W x 4'-1 3/4"H x 1'-1 13/16"D  
TOTAL BOARD HEIGHT (WITH BASE): 5'-11 1/2"H  
MINIMUM SETBACK FROM PUBLIC WAY: 40'  
NEW SCREEN SQUARE FOOTAGE: 10'  
**Single Screen**



E) EXISTING DRIVE-THRU EQUIPMENT TO BE REMOVED

|                 |            |                           |              |
|-----------------|------------|---------------------------|--------------|
| DATE<br>5-14-19 |            | New Placement Menu Boards |              |
| NO.             | 1          | Prepared For:             |              |
| McDONALD'S      |            | Prepared By:              |              |
| CHECKED BY:     | DESIGN BY: | DATE:                     | PROJECT NO.: |
| DRAWN BY:       |            |                           |              |
| SCALE:          |            |                           |              |
| C-1.2           |            |                           |              |



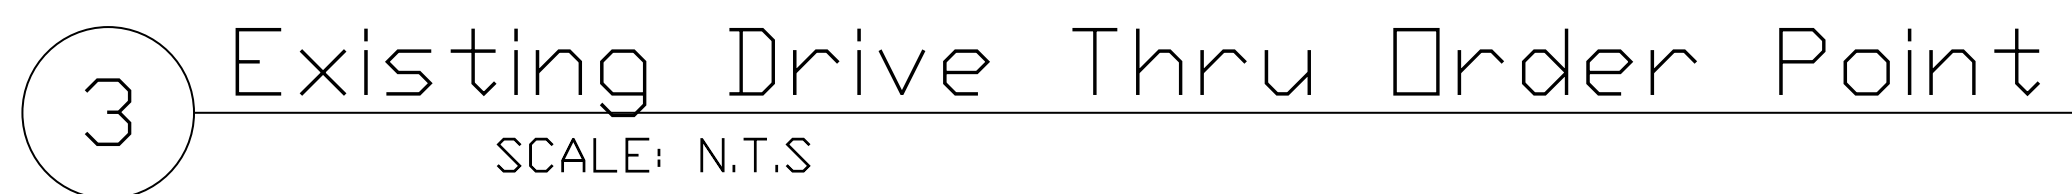



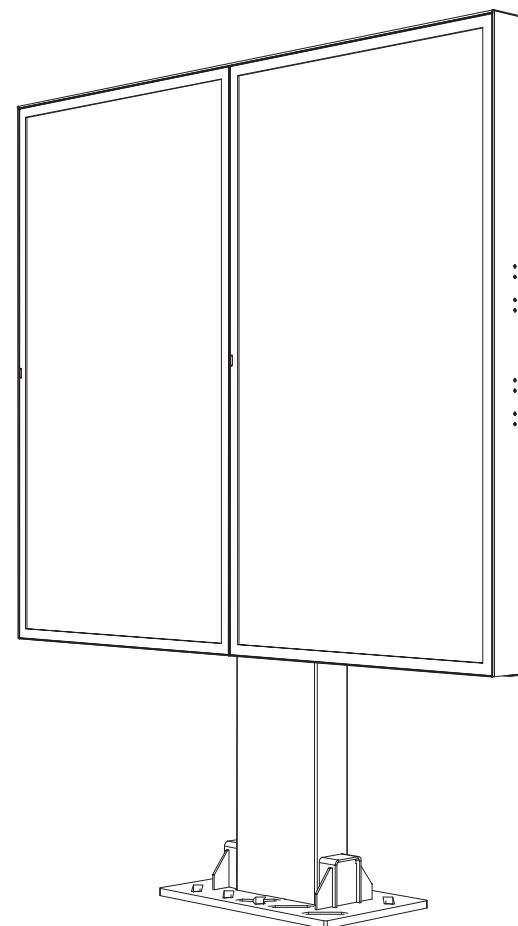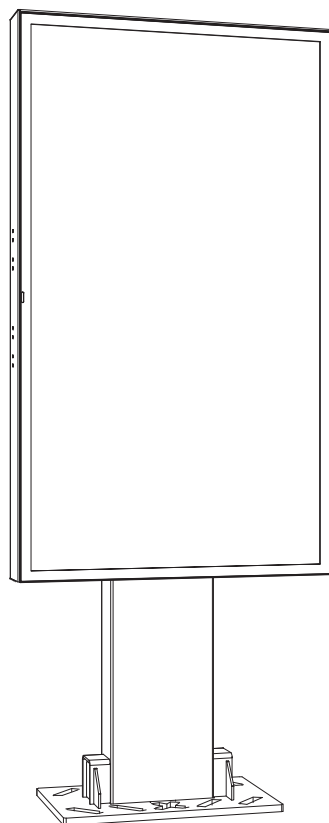

## 55" Outdoor digital menuboard

02-55-2S/D Outdoor Menu Board

Permitting Unit Information

Version 1.0




# Coates ODMB

Single screen unit



Area of display

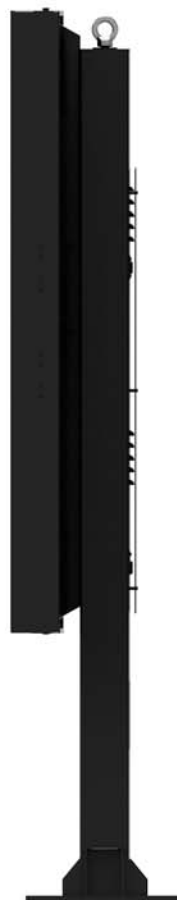




Coates ODMB  
Double screen unit






Area of display

Area of display

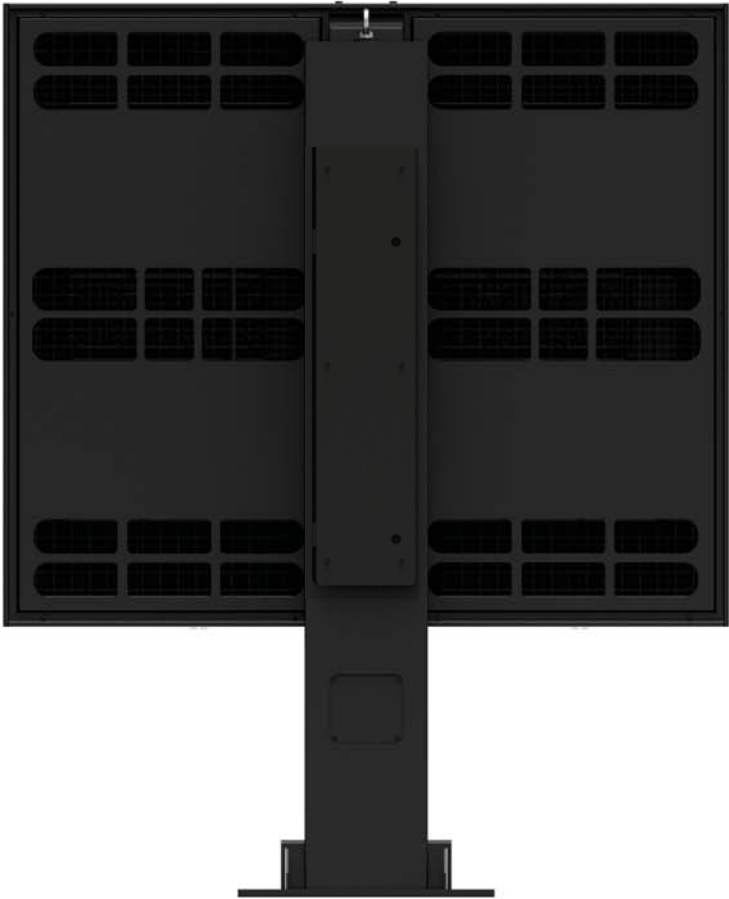






Coates ODMB  
Single screen unit

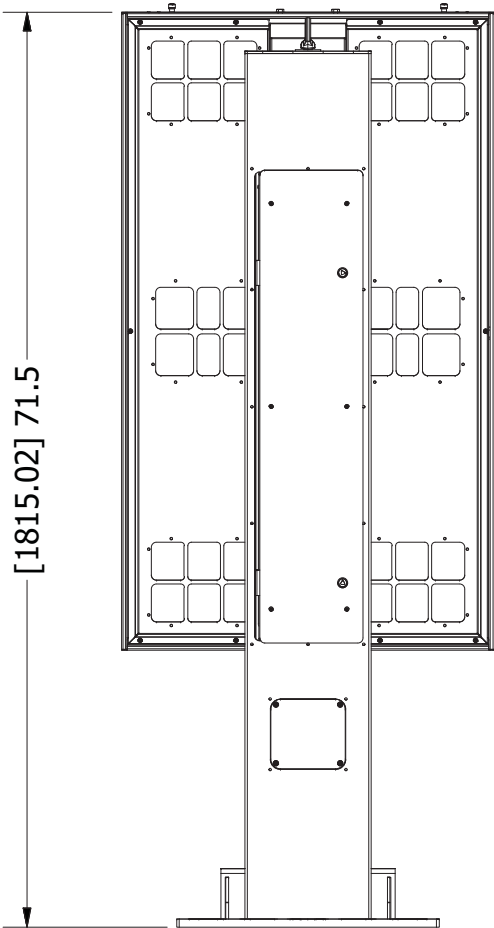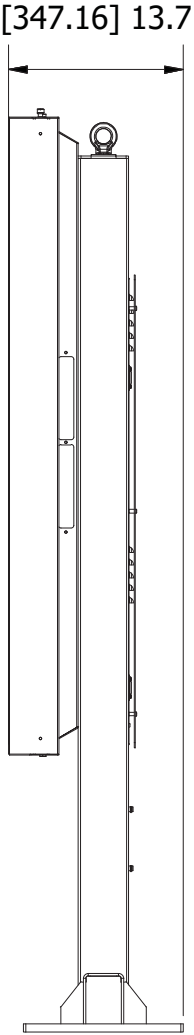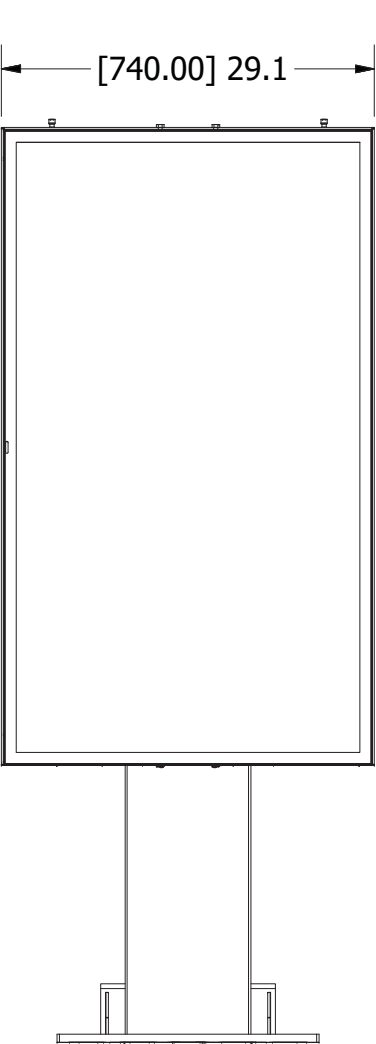




# Coates ODMB


Double screen unit

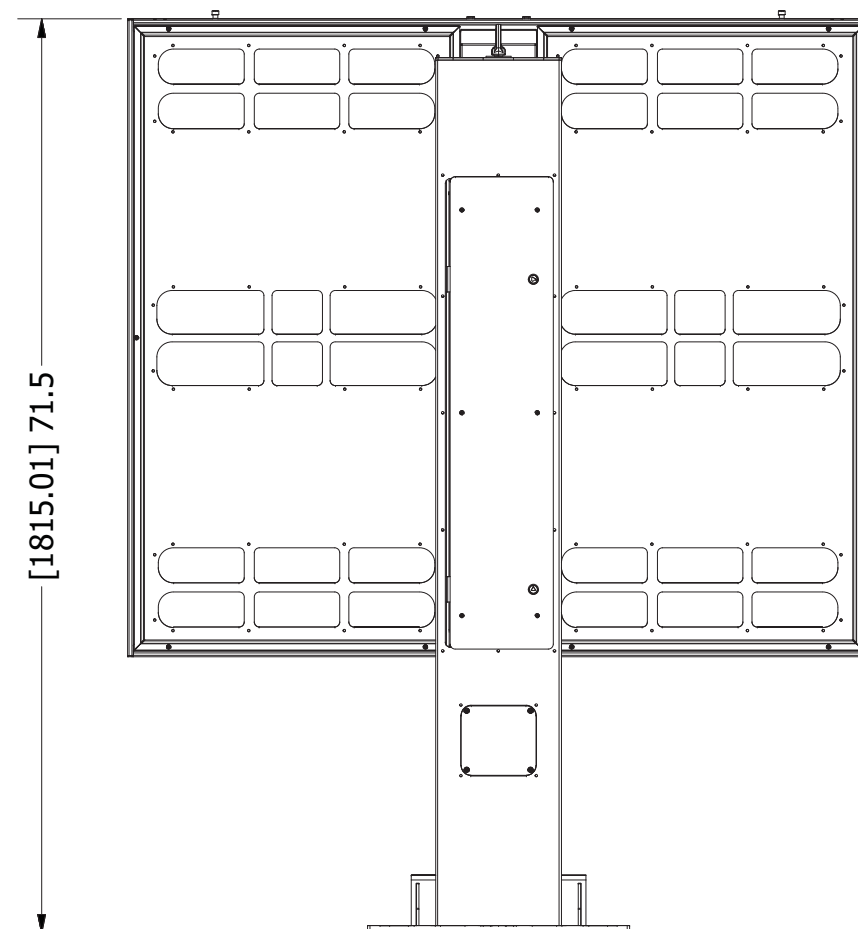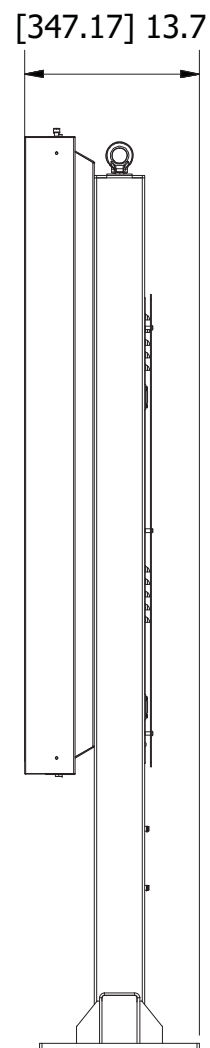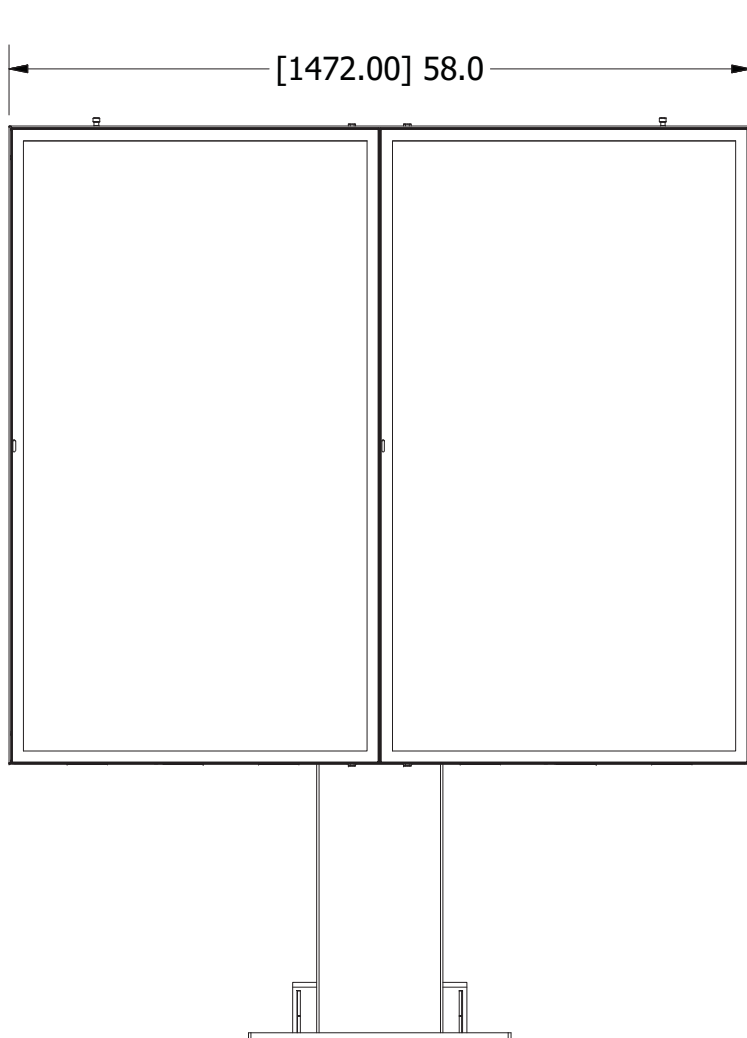



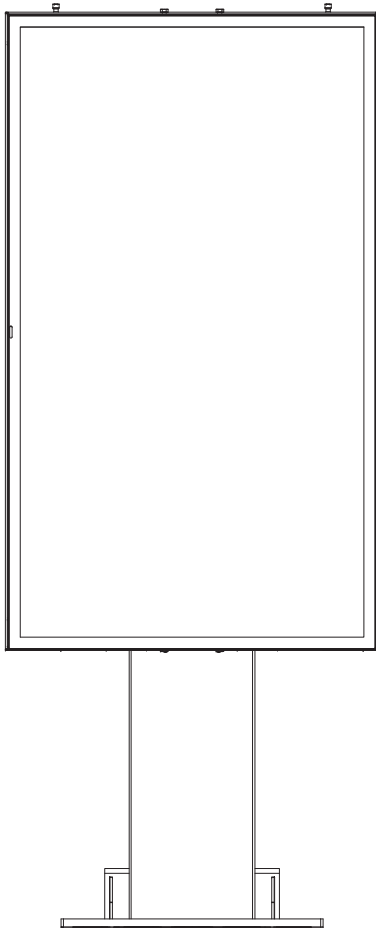

Max potential draw 5.7A @110V

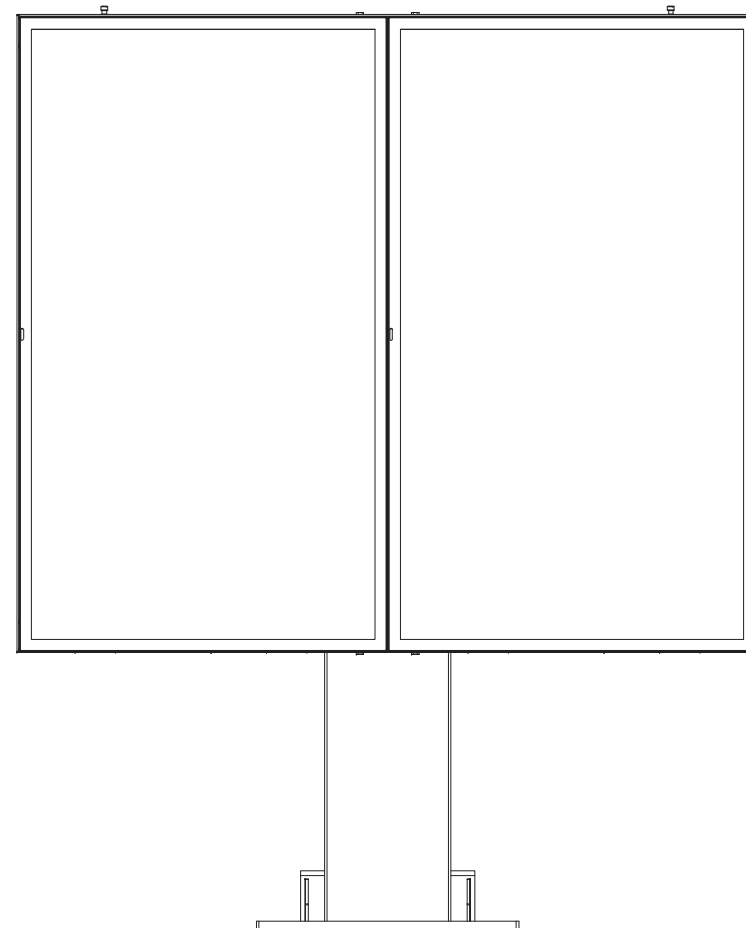

Max potential draw 9.8A @110V



UL48 Electric sign




# Coates ODMB

Height variations




Existing design has multiple fixture points already built in for brackets and screens allow for lowering in 2 additional increments.

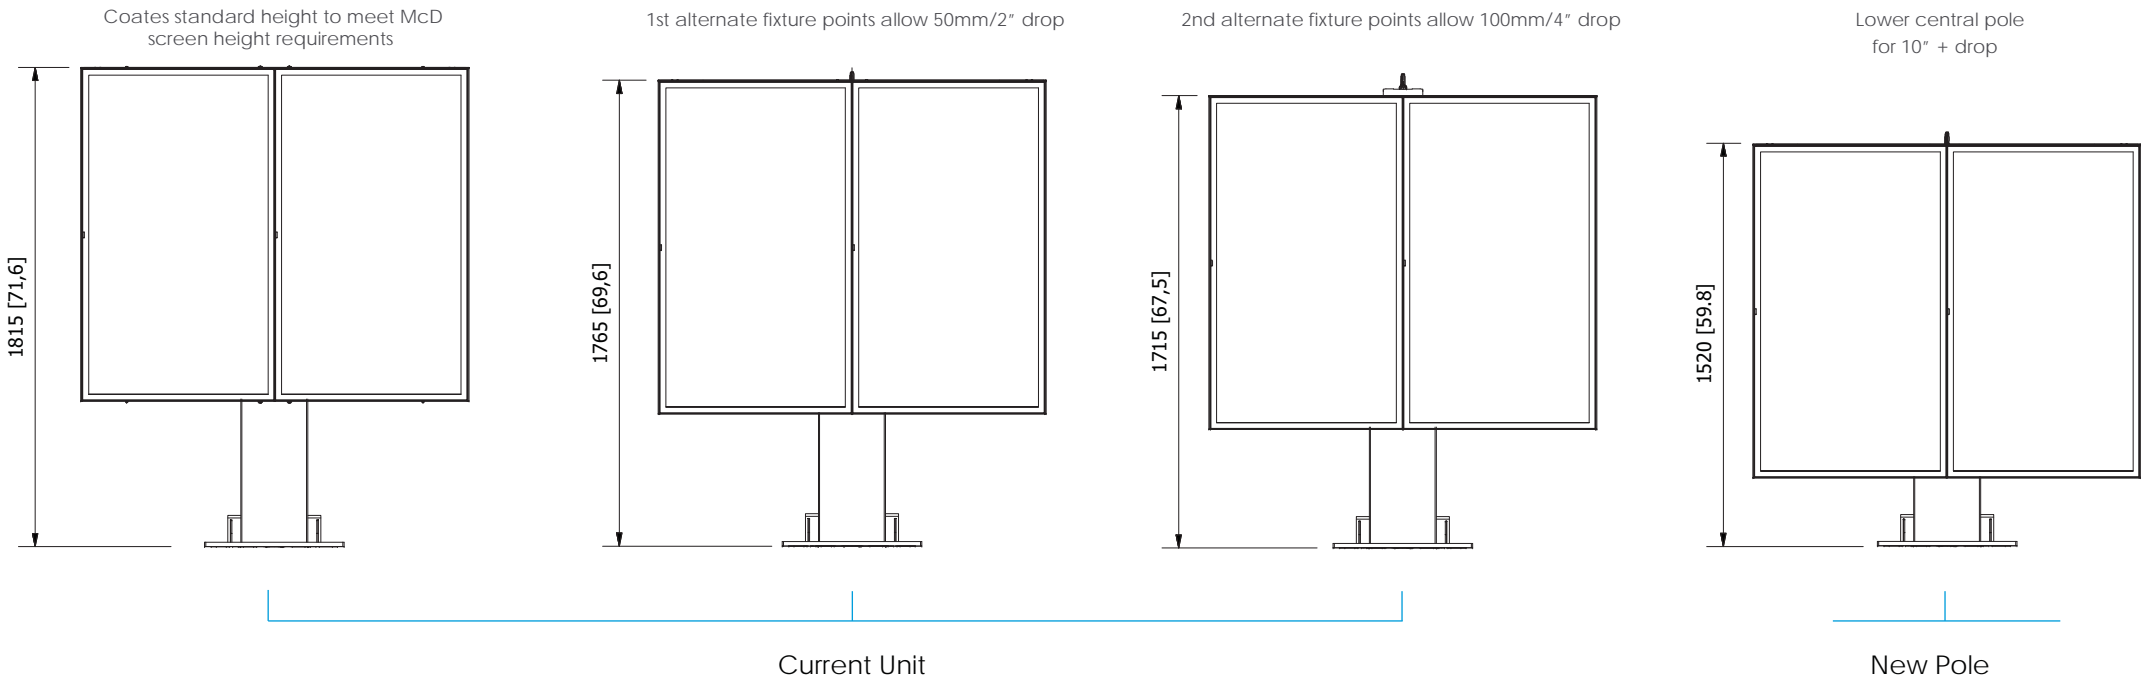



# Display specification

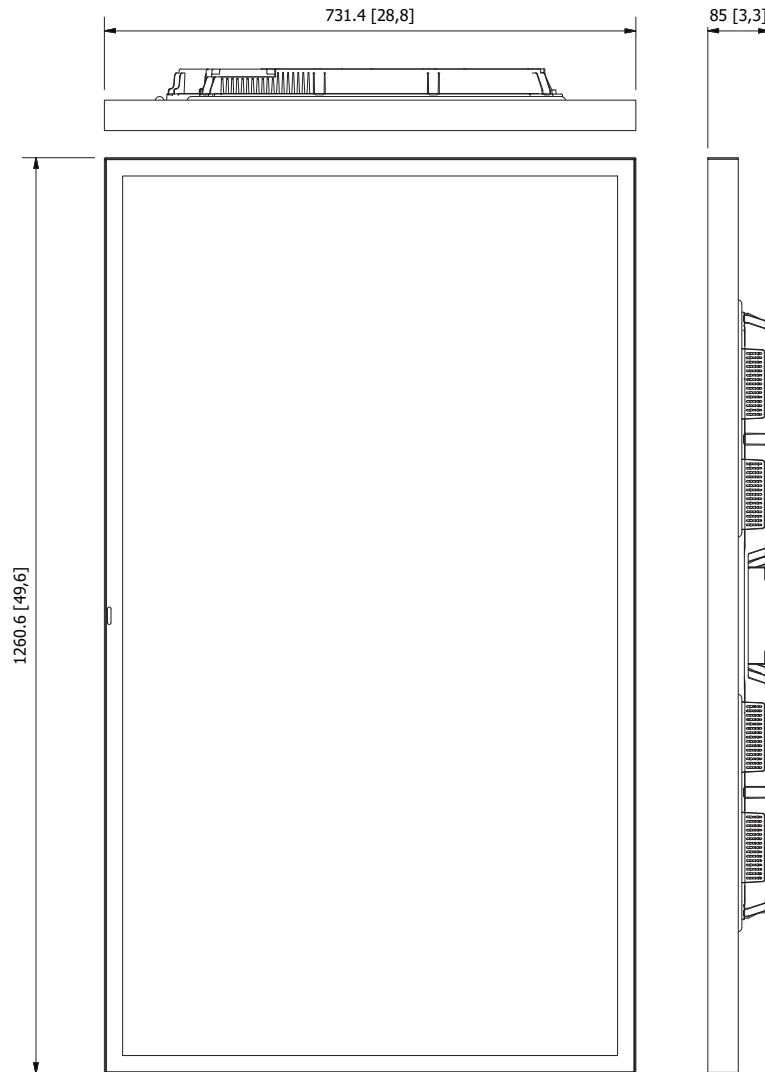

## Samsung 550HF

|                                 |                                       |
|---------------------------------|---------------------------------------|
| <b>Diagonal Size</b>            | <b>55"</b>                            |
| <b>Brightness</b>               | <b>2500 NIT</b>                       |
| <b>Weight</b>                   | <b>52.6 Kg [118.2 lbs]</b>            |
| <b>Mechanical Specification</b> |                                       |
| <b>Glass</b>                    | <b>5T Tempered Glass</b>              |
| <b>Bezel Width</b>              | <b>24.9mm [0.98"]</b>                 |
| <b>Operation Temperature</b>    | <b>-40°C ~ 50 °C [ -40 F ~ 122 F]</b> |
| <b>Certification</b>            | <b>UL : CUL60950-1 (GO)</b>           |



# Display specification

## Lumen output

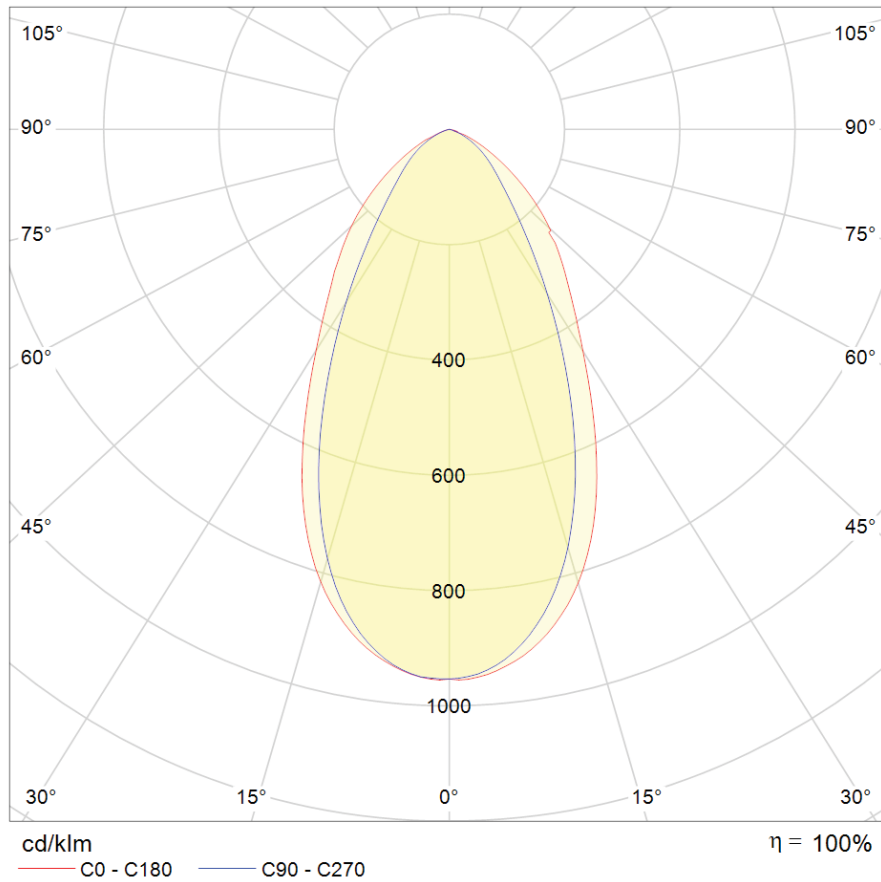


Fig 1.0

The attached is the max potential light output of the screen (see accompanying IES file)


The units have inbuilt ambient light sensors

These light sensors dim the brightness of the screen based on the light surrounding it




The screens can dim from full brightness 2500nit ( Fig1.) all the way down to 500nit to prevent excessive output (glare) in low light and night time environments

# Coates ODMB

Single with additional security glass



Optional tempered glass security cover  
6mm tempered glass

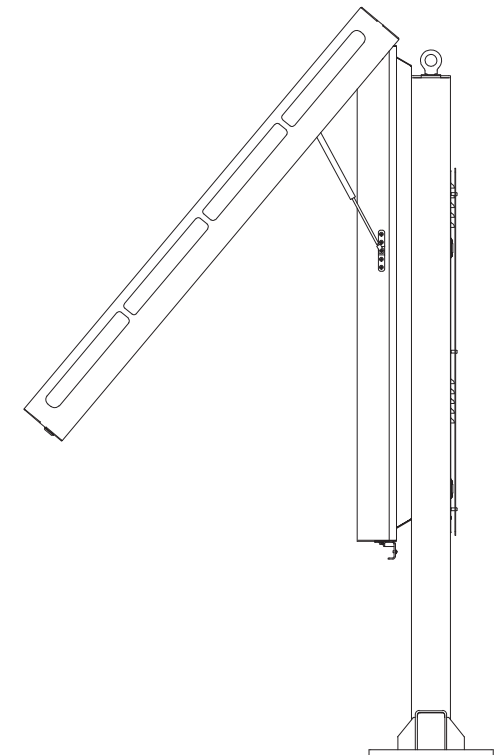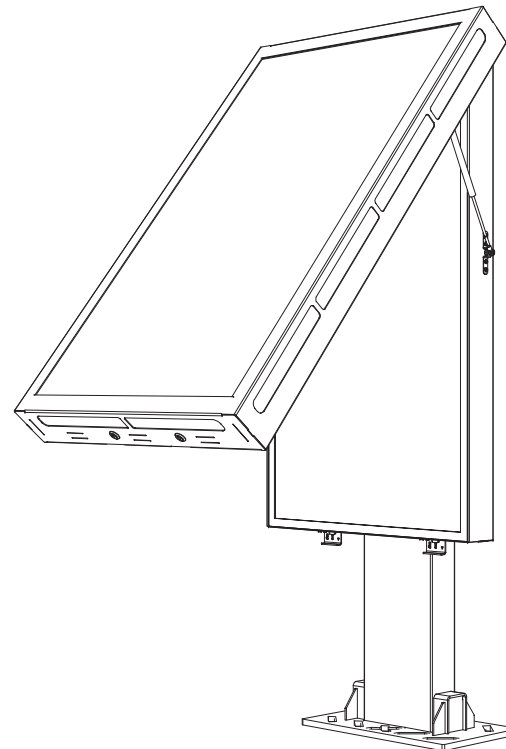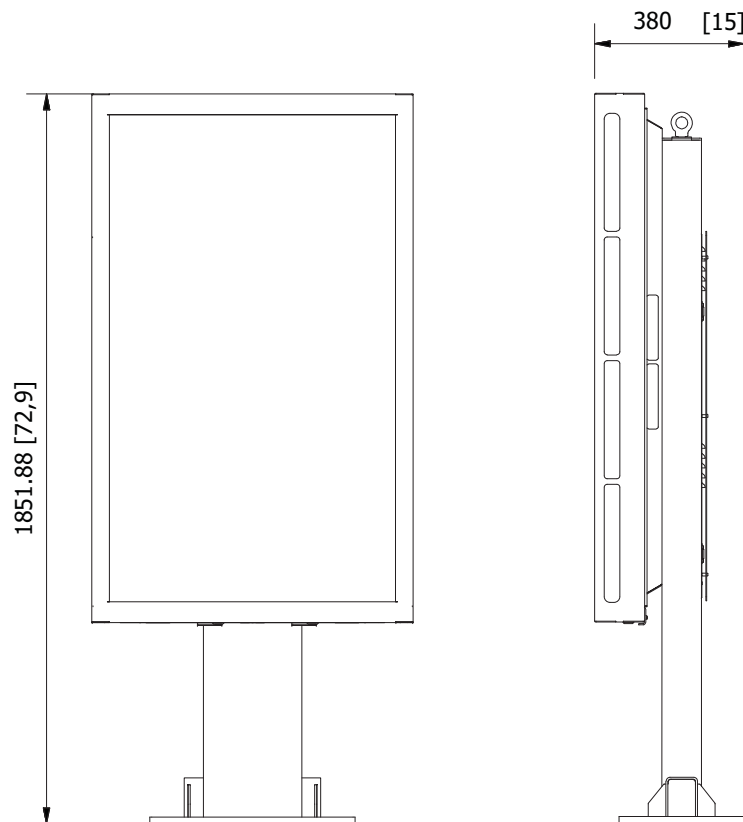




# Coates ODMB

Double with additional security glass




1548 [60,9]



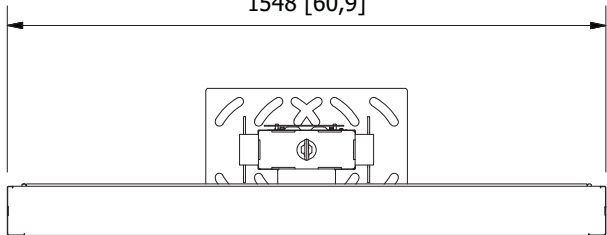


Optional tempered glass security cover  
6mm tempered glass

1852 [72,9]

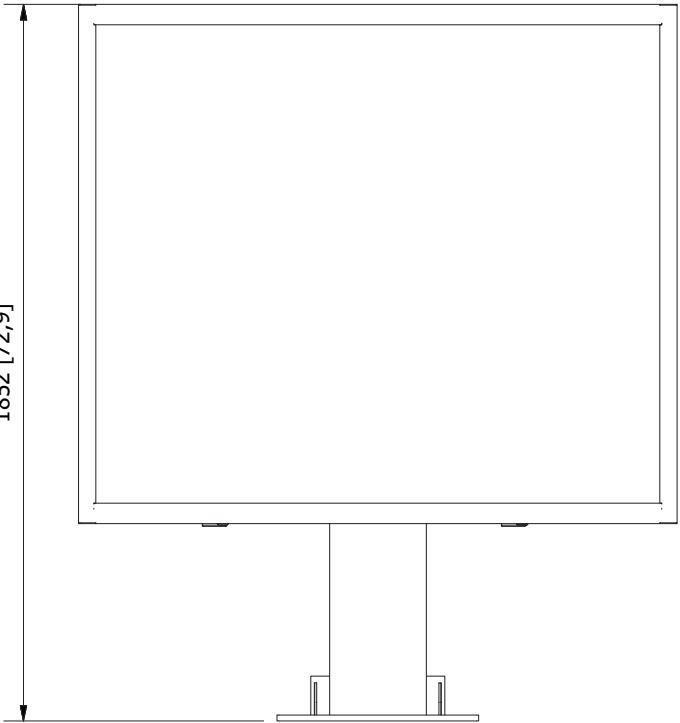

380 [15]

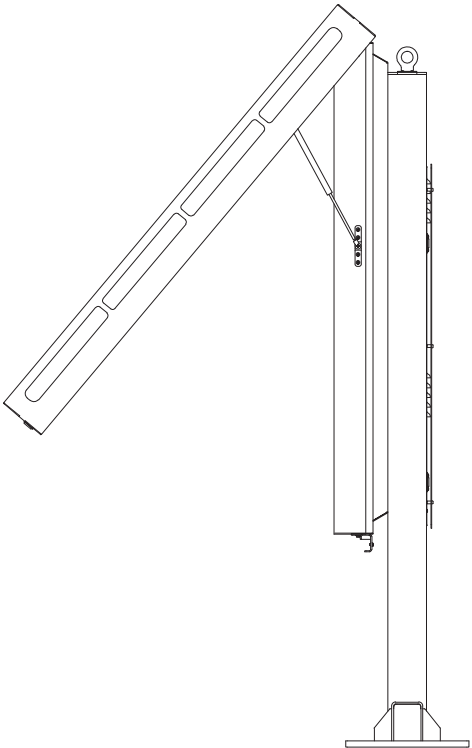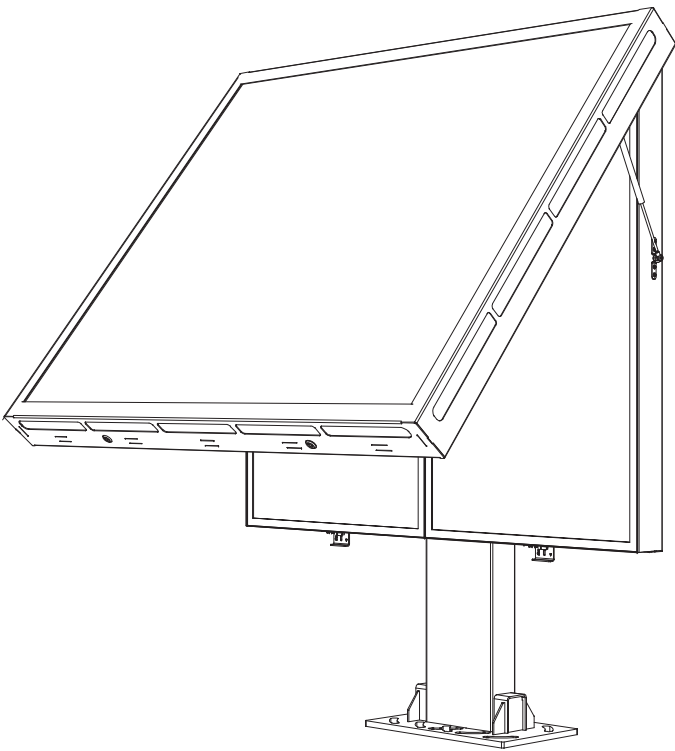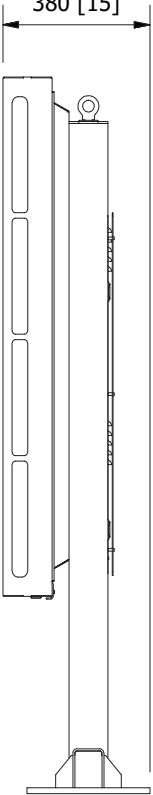

# Coates ODMB

Additional security glass






# Coates ODMB

Color specification



Unit powder coat color Coates dark grey  
Match Pantone: 446C  
Gloss specification: 7-12 units @60deg

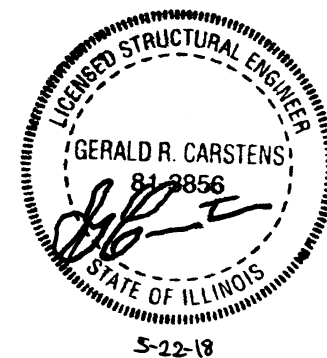

| ENGINEER     | DATE | REMARKS |
|--------------|------|---------|
| ISSUE        | 00   | 5-18-18 |
| for approval |      |         |




KEYSER INDUSTRIES INC.  
10200 South Kedzie Ave.  
Evergreen Park, IL 60805

COLUMN & FOUNDATION  
MCDONALD'S  
SINGLE FACE MENU BOARD  
NS# 7199  
15 E. DUNDEE ROAD  
ARLINGTON HEIGHTS, ILLINOIS

GRG NO. 18-130-124

DRAW. NO. NS# 7199-SF

SHEET 1 of 1

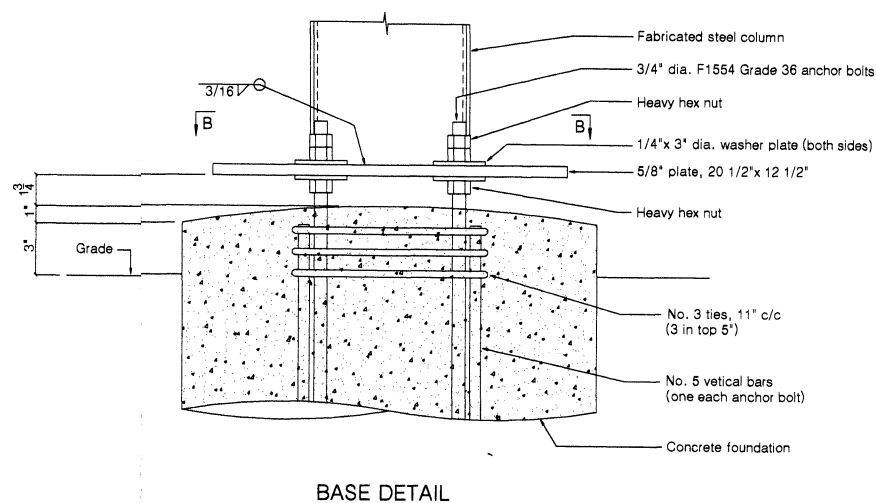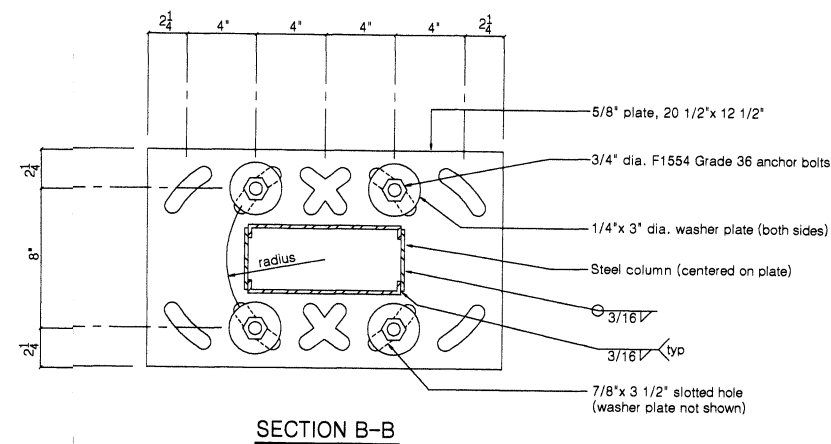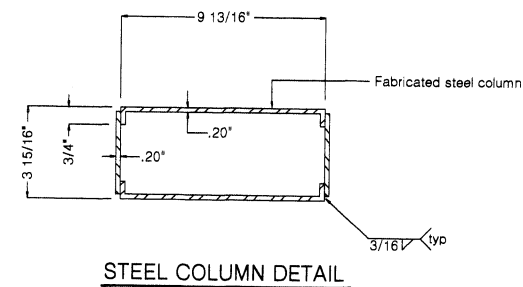

NOTES  
• Structural design conforms to the 2015 International Building Code.  
• Design standard is ASCE 7-10.

WIND  
• Design winds - 105 mph. (3 sec. gust) Exposure C.  
• Structure is classified risk category 1.  
• Wind importance factor -  $I_w = 1.0$   
• Design wind pressure is 17.8 p.s.f.

SEISMIC  
• Seismic load importance factor:  $I_e = 1.0$   
• Structure is classified occupancy category 1.  
• Mapped spectral response accelerations:  
   $S_s = 0.087 g$   
   $S_1 = 0.125 g$   
• Site class: D  
• Spectral response coefficients:  
   $S_{DS} = 0.125$   
   $S_{D1} = 0.097$



• Seismic design category is A.  
• Seismic basic force resisting system:  
  Non-buildings structure not similar to building - signs and billboards.  
• Design base shear:  $V = 0.04$  kips  
• Seismic response coefficient:  $C_s = 0.04$   
• Response modification factor:  $R = 3$   
• Analysis procedure used: Equivalent lateral force method.

STEEL  
• Structural steel plate shall conform to ASTM A36.  
• Bolt holes shall be the AISC standard size (unless noted otherwise).  
• Steel shall be primed and painted, except for the embedded portions of members.  
• Steel welding shall be in accordance with AWS standards.  
• Steel members and elements of the structure shall be fabricated and erected according to the latest AISC specifications and standard practice.

FOUNDATION & CONCRETE  
• Concrete shall attain a 28-day compressive strength of  $f'_c = 3000$  p.s.i.  
• Concrete reinforcing steel shall conform to ASTM A615 grade 60.  
• Allowable lateral bearing of the soil profile is an assumed 150 p.s.f./ft.  
• Type and structural character of the soil profile is to be confirmed with an investigation by others.

GENERAL  
• The contractor shall verify all dimensions and conditions in the field and notify the engineer of any discrepancies.  
• GRC Engineering, Inc. will not be supervising or monitoring the erection/installation of this structure.

This is an original unpublished drawing; it is not to be reproduced, copied, or exhibited in any fashion without written permission of Keyser Industries Inc.

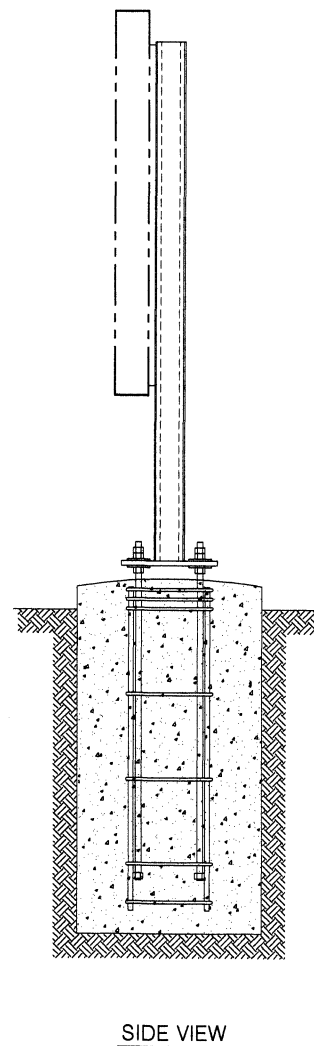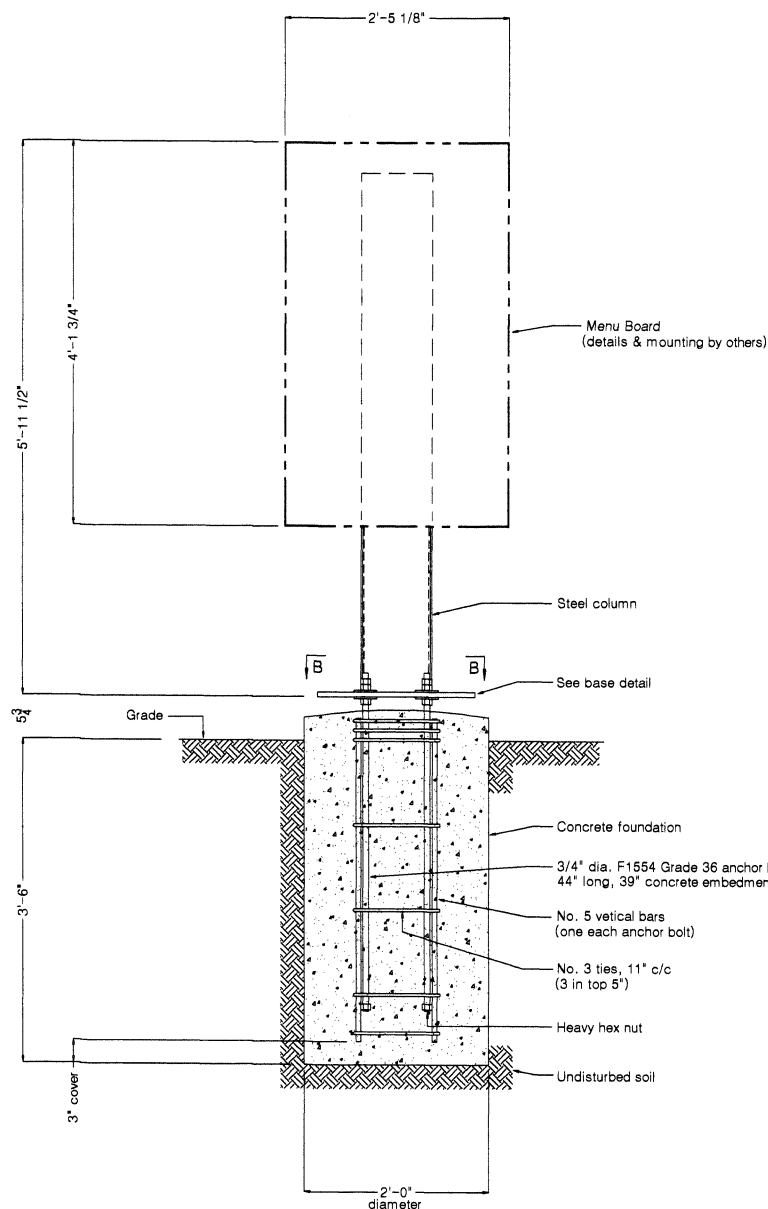


MENU BOARD ELEVATION

SIDE VIEW

BASE DETAIL

STEEL COLUMN DETAIL





| ENGINEER | DATE | REMARKS      |
|----------|------|--------------|
| ISSUE    | 00   | 5-18-18      |
| NO       |      | for approval |




KEYSER INDUSTRIES INC.  
10200 South Kedzie Ave.  
Evergreen Park, IL 60805

COLUMN & FOUNDATION  
MCDONALD'S  
DOUBLE FACE MENU BOARD  
NS# 7199  
15 E. DUNDEE ROAD  
ARLINGTON HEIGHTS, ILLINOIS

GRS NO. 18-130-124

DRAW. NO. NS# 7199-DF

SHEET 1 of 1

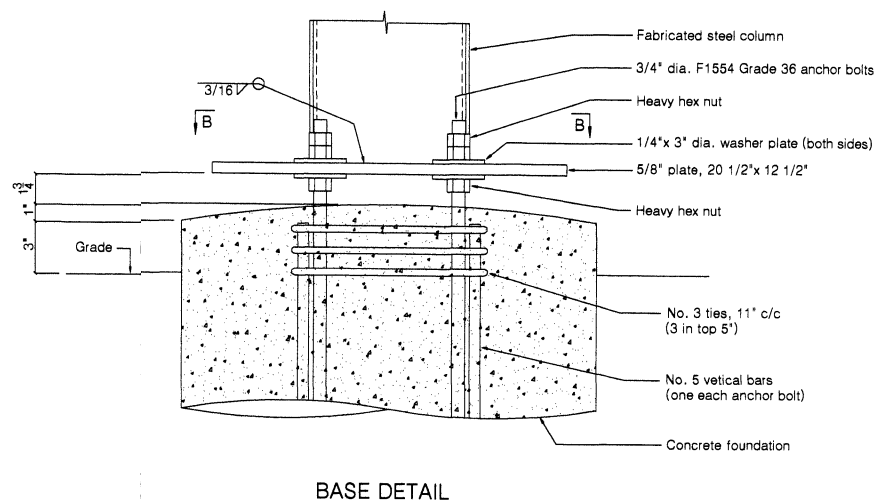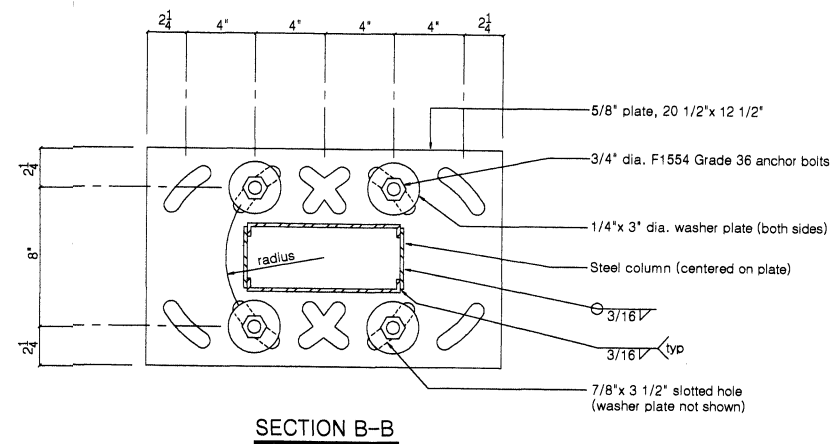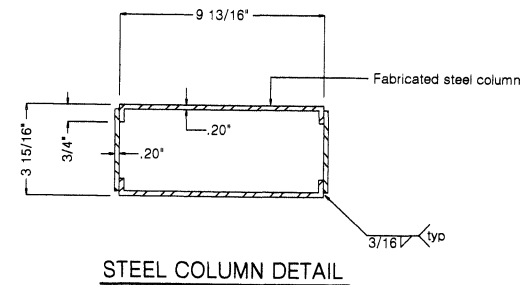

- NOTES
- Structural design conforms to the 2015 International Building Code.
  - Design standard is ASCE 7-10.

- WIND
- Design winds - 105 mph. (3 sec. gust) Exposure C.
  - Structure is classified risk category 1.
  - Wind importance factor -  $I_w = 1.0$
  - Design wind pressure is 17.8 p.s.f.

- SEISMIC
- Seismic load importance factor:  $I_E = 1.0$
  - Structure is classified occupancy category 1.
  - Mapped spectral response accelerations:  
 $S_s = 0.087 g$   
 $S_1 = 0.125 g$



- Site class: D
- Spectral response coefficients:  
 $S_{DS} = 0.125$   
 $S_{D1} = 0.097$

- Seismic design category is A.
- Seismic basic force resisting system:  
Non-buildings structure not similar to building - signs and billboards.
- Design base shear: .04 kips
- Seismic response coefficient:  $C_s = 0.04$
- Response modification factor:  $R = 3$ .
- Analysis procedure used: Equivalent lateral force method.

- STEEL
- Structural steel plate shall conform to ASTM A36.
  - Bolt holes shall be the AISC standard size (unless noted otherwise).
  - Steel shall be primed and painted, except for the embedded portions of members.
  - Steel welding shall be in accordance with AWS standards.
  - Steel members and elements of the structure shall be fabricated and erected according to the latest AISC specifications and standard practice.

- FOUNDATION & CONCRETE
- Concrete shall attain a 28-day compressive strength of  $f'_c = 3000$  p.s.i.
  - Concrete reinforcing steel shall conform to ASTM A615 grade 60.
  - Allowable lateral bearing of the soil profile is an assumed 150 p.s.f./ft.
  - Type and structural character of the soil profile is to be confirmed with an investigation by others.

- GENERAL
- The contractor shall verify all dimensions and conditions in the field and notify the engineer of any discrepancies.
  - GRC Engineering, Inc. will not be supervising or monitoring the erection/installation of this structure.
- This is an original unpublished drawing: it is not to be reproduced, copied, or exhibited in any fashion without written permission of Keyser Industries Inc.

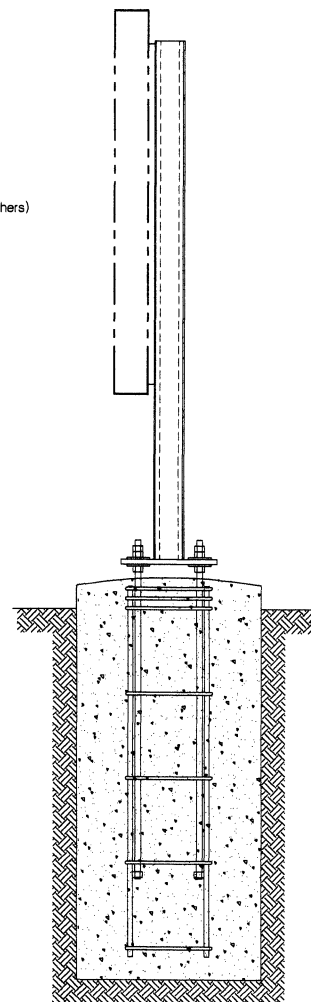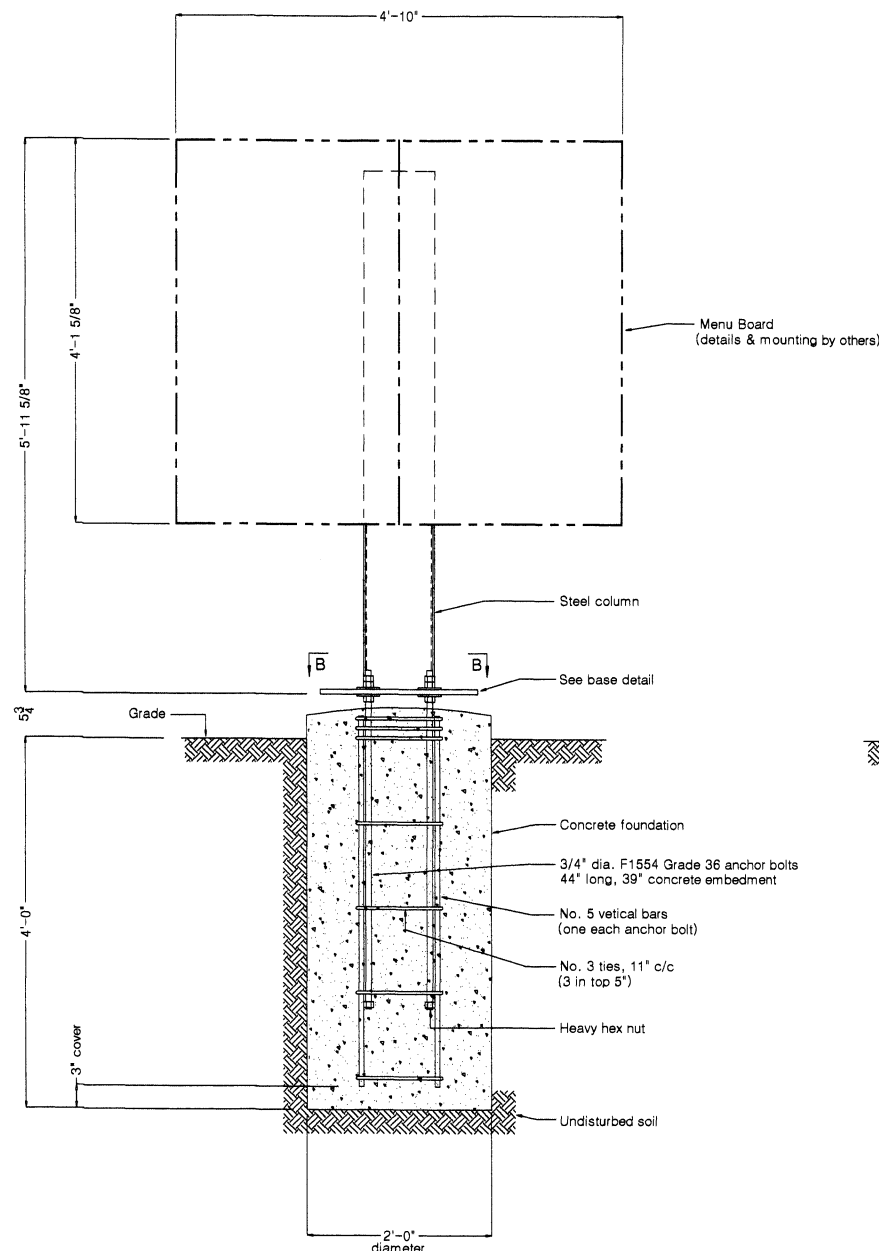

SIDE VIEW