

REMOVE EXISTING CURB AND REPLACE WITH B-612 CURB AND GUTTER

EXISTING DEPRESSED CURB TO REMAIN


REMOVE EXISTING ASPHALT PAVEMENT AND REPLACE WITH TOPSOIL AND SOD

REMOVE EXISTING CURB AND REPLACE WITH B-612 CURB AND GUTTER

REMOVE EXISTING CURB AND REPLACE WITH TOPSOIL AND SOD

NORTH DRYDEN PLACE


DESIGN VEHICLE

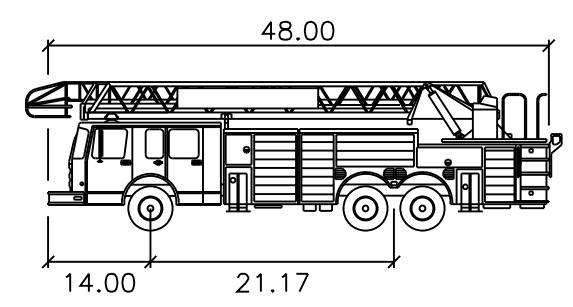

Arlington Hts FT  
Tower 131 feet

Width : 8.50  
Track : 8.00  
Lock to Lock Time : 6.0  
Steering Angle : 40.0


- - BODY OF VEHICLE (OVERHANG)
- - - - FRONT TIRES PATH
- - - - REAR TIRES PATH

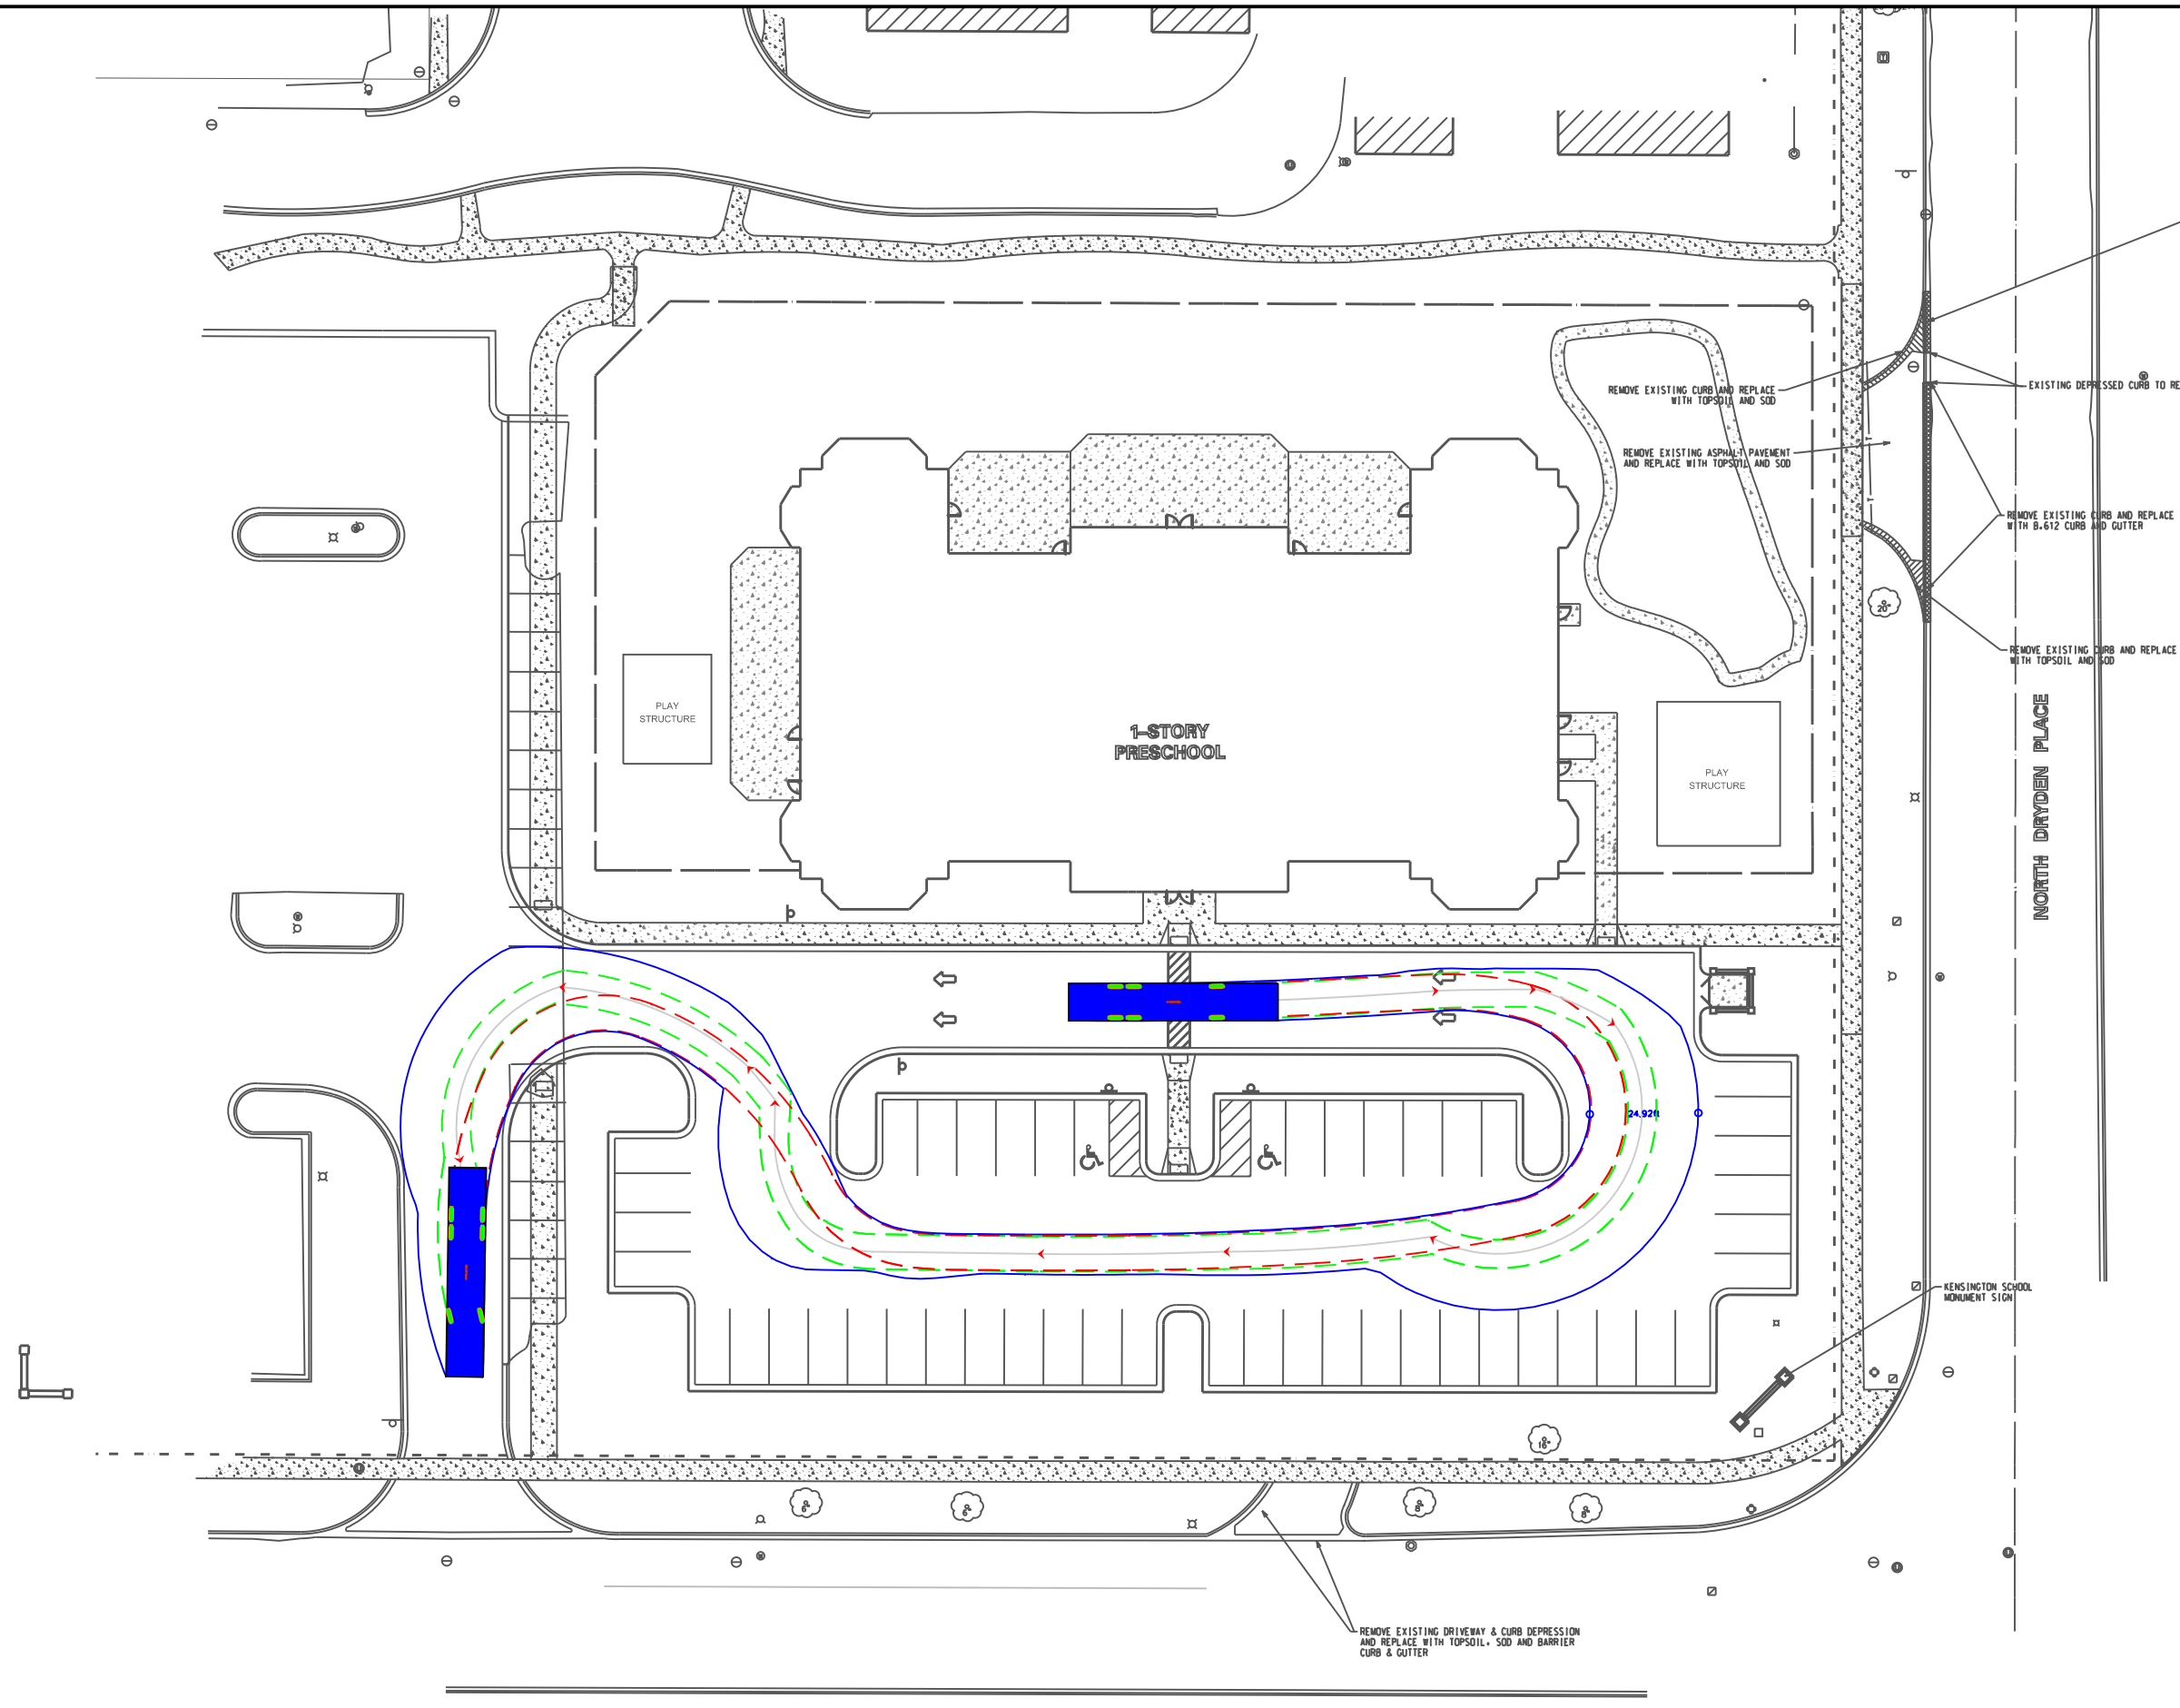

REMOVE EXISTING CURB AND REPLACE WITH B.612 CURB AND GUTTER  
 EXISTING DEPRESSED CURB TO REMAIN  
 REMOVE EXISTING ASPHALT PAVEMENT AND REPLACE WITH TOPSOIL AND SOD  
 REMOVE EXISTING CURB AND REPLACE WITH B.612 CURB AND GUTTER  
 REMOVE EXISTING CURB AND REPLACE WITH TOPSOIL AND SOD

NORTH DRYDEN PLACE

DESIGN VEHICLE

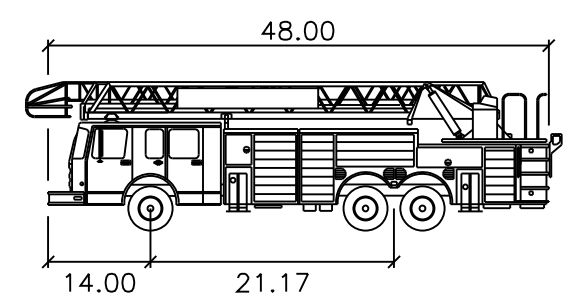

Arlington Hts FT  
 Tower 131 feet  
 Width : 8.50  
 Track : 8.00  
 Lock to Lock Time : 6.0  
 Steering Angle : 40.0

- - BODY OF VEHICLE (OVERHANG)
- - - - - FRONT TIRES PATH
- - - - - REAR TIRES PATH