

DESCRIPTION

This low glare canopy is TRACE[®]LITE's 'softer, gentler' distribution within the TLED series of solid state lighting (SSL). The specially designed polymethyl methacrylate (PMMA) UV stabilized lens interacts with the high performance light engines to optimize visual comfort without sacrificing lighting efficacy. This unique configuration eliminates eye strain or distraction. Attention to tasks at hand at schools, libraries, pharmacy drive throughs and truck stop sites are enhanced by optimizing the quality of light within the environment.

This low glare version of TRACE-LITE's versatile, high performance SSL canopy line is available in two (2) different low profile housings to satisfy diverse installation requirements, from basic surface mount installations to recessed applications. Both styles are powered by industry leading LED light engines featuring superior thermal management. This synergistic design far exceeds the performance capabilities of any retrofit and exemplifies true, integrated SSL design; simple elegance, exceptional performance.

The TLED low glare canopy series is available with four (4) different LED light engines configurations: 23, 41, 54 or 72 total system watts and approximate delivered outputs of 2320, 4208, 5564, or 7297 lumens.

SPECIFICATIONS

Construction:

Precision die formed aluminum housings feature clean architectural lines with ample, integral mounting space for future accessories. The TLED series canopy family's most important construction feature is its integral thermal management. The housing is fabricated using 1/8" aluminum plate, which not only provides strength and durability but also acts as a substantial heat sink and allows for optimum performance and durability of the LED light engine without sacrificing design aesthetics or increasing the outside dimensions of the housing. LEDLITE^{logic} heat sinking technology moves heat away from the LEDs by taking advantage of thermal convection dynamic properties and maximizing system performance that delivers up to a 190,000 hour life with 70% lumen maintenance at 77°F (25°C). The TLED series canopy family is ETL Listed for Wet Locations, and incorporates a UV resistant, long lasting, polyester based powder coated finish.

Optics:

The TLED series canopy family of luminaires delivers exceptional light quality and efficiency. The TLED low glare unit's optic design not only provides excellent Type V distribution, it leads the industry in canopy glare control. The UV stabilized PMMA lens is highly durable and extremely resistant to environmental discoloration over time typically caused in other fixtures by heat, aging, dust and air born particulates.

Electrical:

A choice of four (4) performance levels are available in the TLED low glare canopy series offering LED light engines with either 20, 36, 48 or 64 LEDs, drawing 23, 41, 54 or 72 total watts and providing approximately 2320, 4208, 5564, or 7297 initial delivered lumens, respectively. See chart on page 2 for complete performance figures. The available LED light engine wattages are powered by 0-10V dimmable, constant current control drivers and provide up to a 190,000 hour rated life with 70% lumen maintenance at 77°F (25°C), a 4700K CCT, and a CRI of ≥70. All drivers are Class 2 power supplies with input voltage range of 120VAC to 277VAC, providing a Class A EMI rating and a high power factor of ≥0.90. The TLED series canopies are suitable for operation in -40°F to 104°F (-40°C to 40°C) ambient conditions.

Thermal Management:

LEDLITE^{logic} heat sinking technology moves heat away from the LEDs by taking advantage of thermal convection dynamic properties and maximizing system performance that delivers up to a 190,000 hour life with 70% lumen maintenance.

Environmentally Friendly Design:

TLED series canopy luminaires consume very little energy and provide long life in comparison to traditional lamp technologies. The TLED low glare canopy series is RoHS (Restriction of Hazardous Substances) compliant and provides a significant reduction in KW load and carbon emissions.

Installation:

The TLED low glare series canopies can be installed and wired by a single person. The base plate easily attaches to a 3" or 4" J-box, and the fixture housing is attached to the base plate by four (4) captive fasteners. The TLED-C can be surface mounted to a recessed J-box, surface mounted with conduit, or pendant mounted using a standard 1/2" downrod & hardware (supplied by others) and the TLED-RC can be recessed mounted.

Transient Protection System (Option: TP):

The LEDLITE^{logic} optional transient protection device is designed to be used in conjunction with our LED drivers. The "TP" option utilizes a 3-leaded device that protects Line-Ground, Line-Neutral, and Neutral-Ground in accordance with IEEE/ANSI C62.41.2 guidelines. The surge current rating of the "TP" option is 10,000 amps.

Photocontrol (Option: PC):

Optional field installed photocontrol provides dusk-till-dawn security. Input voltage must be specified to match fixture input voltage. Not available on recessed units (TLED-RC).

Model: **TLED-C-20-VS-LG-WW** Date: _____
Accessories: _____
Job Name: **Windsor School** Type: **S1**

LEDLITE^{logic}



Recessed Canopy (RC)



Specs at a Glance				
	20 LED	36 LED	48 LED	64 LED
Wattage (Nominal)	23W	41W	54W	72W
Ingress Protection	ETL Listed for Wet Locations			
Lumens (lm)	2320	4208	5564	7297
Efficacy (LPW)	103	103	104	102
CCT	4700K			
Input Voltage	120~277 Voltage Sensing			
Optics	Performance Optic - Type V Very Short			
CRI	≥71			
Warranty	5 Years			
Ambient Temp	-40°F to 104°F (-40°C to 40°C)			

Testing & Compliance:

The reliability and performance of the TLED series canopy luminaires are evaluated in accordance with the parameters outlined and reported by LM-79 and LM-80 documents. Photometric data is tested to IESNA LM-79-08 standard by an independent testing laboratory. Lumen maintenance, or L70, a measure of long term reliability, is determined for the light source, which consists of the LED and PSB sub-assembly as installed in the luminaire, using LM-80 in-situ thermal and reliability data as provided by the LED manufacturer in accordance with DOE/EPA standards.

Listing:
The TLED-C and TLED-RC low glare canopy series are ETL certified under UL1598 specifications and listed for wet locations.


Warranty:
Any component that fails due to manufacturer’s defect is guaranteed for 5 years. The warranty does not cover physical damage, abuse or acts of God. Manufacturer reserves the right to charge for such repairs if deemed necessary.

Fixture Performance

Part Number	Total System Watts	Initial Delivered Lumens	Lumens per Watt (LPW)
TLED-RC-20-VS-LG	23	2320	103
TLED-RC-36-VS-LG	41	4208	103
TLED-RC-48-VS-LG	54	5564	104
TLED-RC-64-VS-LG	72	7297	102

NOTE: Lumen maintenance and life (part of LM-80 data) is per published information from primary LED suppliers and is based on design operation at their specified thermal management and electrical design parameters.


Dimensions

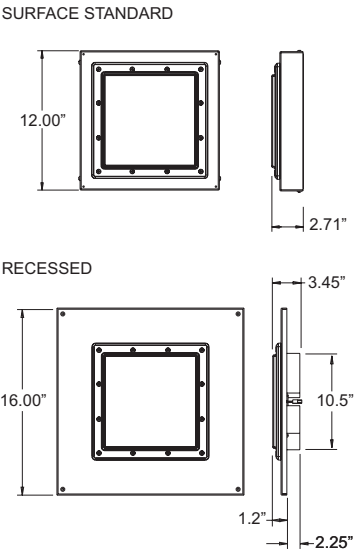

Approximate Weight: 14 lbs.

Sample Photometrics

TLED-C-36-VS-LG Mounted at 10' (Type VS Very Short)
Horizontal Spacing Criteria: 1.24

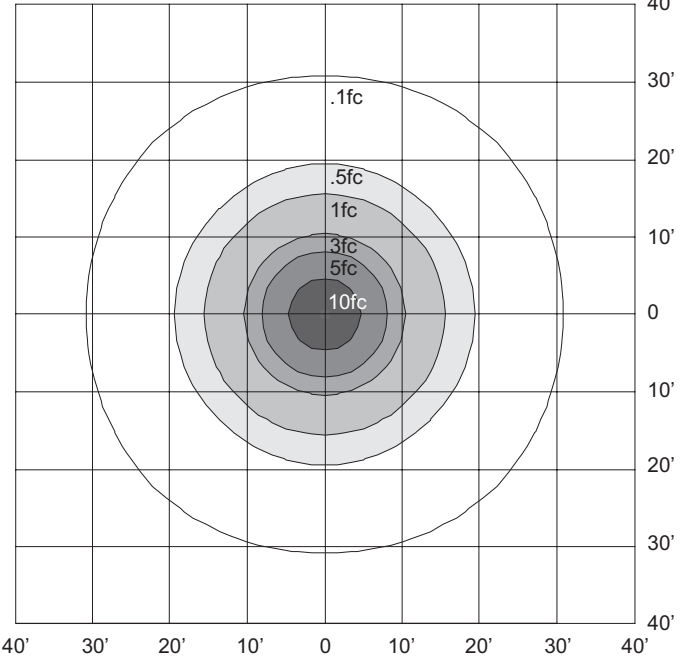

Ordering Information

Example: TLED-C-36-VS-LG-WW

Series	# of LEDs	Input Voltage	Optics	Finish (Housing/Trim)	Options (Factory Installed)
TLED-C = Standard Canopy	20 = 20 LEDs	VS = 120~277VAC (Voltage Sensing)	LG = Low Glare	WW = White/White	TP = Transient Protection System
TLED-RC = Recessed Canopy	36 = 36 LEDs				CC¹ = Custom Color
	48 = 48 LEDs				
	64 = 64 LEDs				

Notes

¹ Consult factory for specific part number and details

² Not available on recessed units (TLED-RC)

³ Order as separate line item

Accessories³ (Field Installed)

PC1² = 120VAC Photocontrol

PC2² = 208-277VAC Photocontrol




D-Series Size 1 LED Area Luminaire

d#series



Specifications

EPA:	1.01 ft ² (0.09 m ²)
Length:	33" (83.8 cm)
Width:	13" (33.0 cm)
Height:	7-1/2" (19.0 cm)
Weight (max):	27 lbs (12.2 kg)

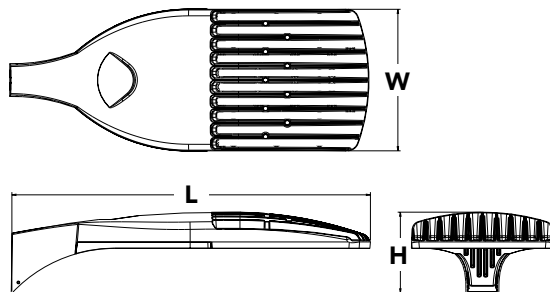

Catalog Number	DSX1 LED 60C 1000 50K TFTM MVOLT SPA PIRH
Notes	Windsor School
Type	P1

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment.

The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED 60C 1000 40K T3M MVOLT SPA DDBXD

DSX1LED							
Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	
DSX1 LED	Forward optics	530 530 mA	30K 3000 K	T1S Type I short	T5S Type V short	MVOLT ⁵	Shipped included
	30C 30 LEDs (one engine)	700 700 mA	40K 4000 K	T2S Type II short	T5M Type V medium	120 ⁵	SPA Square pole mounting
	40C 40 LEDs (two engines)	1000 1000 mA (1 A) ²	50K 5000 K	T2M Type II medium	T5W Type V wide	208 ⁵	RPA Round pole mounting
	60C 60 LEDs (two engines)		AMBPC Amber phosphor converted ³	T3S Type III short	BLC Backlight control ^{2,4}	240 ⁵	WBA Wall bracket
	Rotated optics ¹			T3M Type III medium		277 ⁵	SPUMBA Square pole universal mounting adaptor ⁷
	60C 60 LEDs (two engines)			T4M Type IV medium	LCCO Left corner cutoff ^{2,4}	347 ⁶	RPUMBA Round pole universal mounting adaptor ⁷
				TFTM Forward throw medium	RCCO Right corner cutoff ^{2,4}	480 ⁶	Shipped separately
				T5VS Type V very short			KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸

Control options	Other options	Finish (required)
Shipped installed	Shipped installed	DDBXD Dark bronze
PER NEMA twist-lock receptacle only (no controls) ⁹	HS House-side shield ¹⁹	DBLXD Black
PER5 Five-wire receptacle only (no controls) ^{9,10}	WTB Utility terminal block ²⁰	DNAXD Natural aluminum
PER7 Seven-wire receptacle only (no controls) ^{9,10}	SF Single fuse (120, 277, 347V) ²¹	DWHXD White
DMG 0-10V dimming driver (no controls) ¹¹	DF Double fuse (208, 240, 480V) ²¹	DDBTXD Textured dark bronze
DCR Dimmable and controllable via ROAM [®] (no controls) ¹²	L90 Left rotated optics ²²	DBLBXD Textured black
DS Dual switching ^{13,14}	R90 Right rotated optics ²²	DNATXD Textured natural aluminum
PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ¹⁵	BS Bird spikes	DWHGXD Textured white
PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ¹⁵		
PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ¹⁵		

Accessories	Controls & Shields	NOTES
DL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³	DL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³	1 Rotated optics available with 60C only.
DL1347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³	DL1347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³	2 Not available AMBPC.
DL1480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³	DL1480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³	3 Only available with 530mA or 700mA.
DSHORT SBK U Shorting cap ²³	DSHORT SBK U Shorting cap ²³	4 Not available with HS.
DSX1HS 30C U House-side shield for 30 LED unit ¹⁹	DSX1HS 30C U House-side shield for 30 LED unit ¹⁹	5 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120V, 208V, 240V or 277V options only when ordering with fusing (SF, DF options).
DSX1HS 40C U House-side shield for 40 LED unit ¹⁹	DSX1HS 40C U House-side shield for 40 LED unit ¹⁹	6 Not available with single board, 530mA product (30C 530 or 60C 530 DS). Not available with BL30, BL50 or PNMT options.
DSX1HS 60C U House-side shield for 60 LED unit ¹⁹	DSX1HS 60C U House-side shield for 60 LED unit ¹⁹	7 Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴	PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴	8 Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	9 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option.
		10 If ROAM [®] node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming.
		11 DMG option for 347V or 480V requires 1000mA.
		12 Specifies a ROAM [®] enabled luminaire with 0-10V dimming capability; PER option required. Additional hardware and services required for ROAM [®] deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net. N/A with PIR options, DS, PER5, PER7, BL30, BL50 or PNMT options. Node without integral dimming.
		13 Requires 40C or 60C. Provides 50/50 luminaire operation via two independent drivers on two separate circuits. N/A with PER, DCR, WTB, PIR or PIRH.
		14 Requires an additional switched circuit.
		15 PIR and PIR1FC3V specify the SensorSwitch SBGR-10-ODP control; PIRH and PIRH1FC3V specify the SensorSwitch SBGR-6-ODP control; see Outdoor Control Technical Guide for details. Dimming driver standard. Not available with PER5 or PER7. Ambient sensor disabled when ordered with DCR. Separate on/off required.
		16 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7 or PNMT options. Not available with PIR1FC3V or PIRH1FC3V.
		17 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7, BL30 or BL50. Not available with PIR1FC3V or PIRH1FC3V. Separate on/off required.
		18 Dimming driver standard. Not available with PER5, PER7, DMG, DCR, DS, BL30, BL50 or PNMT, PIR, PIRH, PIR1FC3V or PIRH1FC3V.
		19 Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
		20 WTB not available with DS.
		21 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
		22 Available with 60 LEDs (60C option) only.
		23 Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item from Acuity Brands Controls.
		24 For retrofit use only.

For more control options, visit DTL and ROAM online.




One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2011-2016 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 10/19/16
Page 1 of 6

Drilling

Template #8

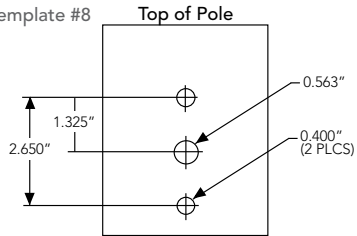

DSX1 shares a unique drilling pattern with the AERIS™ family. Specify this drilling pattern when specifying poles, per the table below.

DM19AS	Single unit	DM29AS	2 at 90°*
DM28AS	2 at 180°	DM39AS	3 at 90°*
DM49AS	4 at 90°*	DM32AS	3 at 120°**

Example: SSA 20 4C DM19AS DDBXD

Visit Lithonia Lighting's [POLES CENTRAL](#) to see our wide selection of poles, accessories and educational tools.

*Round pole top must be 3.25" O.D. minimum.

**For round pole mounting (RPA) only.


Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit [Lithonia Lighting's D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (20').

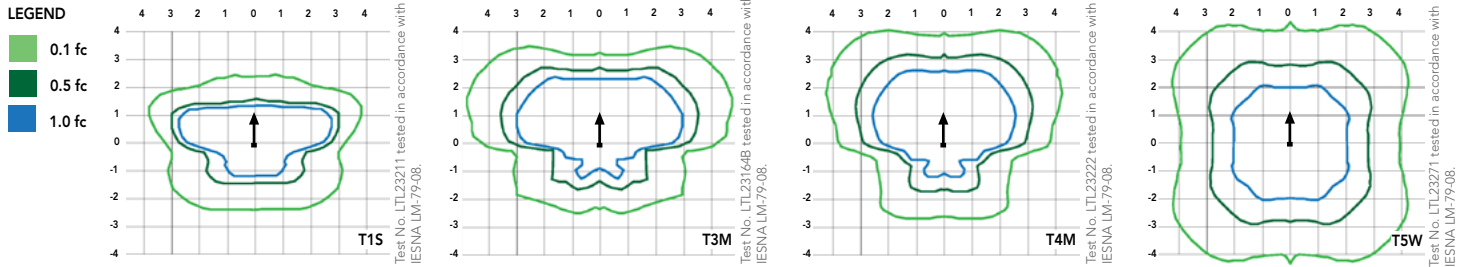

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Electrical Load

Number of LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
30	530	52	0.52	0.30	0.26	0.23	--	--
	700	68	0.68	0.39	0.34	0.30	0.24	0.17
	1000	105	1.03	0.59	0.51	0.45	0.36	0.26
40	530	68	0.67	0.39	0.34	0.29	0.23	0.17
	700	89	0.89	0.51	0.44	0.38	0.31	0.22
	1000	138	1.35	0.78	0.67	0.58	0.47	0.34
60	530	99	0.97	0.56	0.48	0.42	0.34	0.24
	700	131	1.29	0.74	0.65	0.56	0.45	0.32
	1000	209	1.98	1.14	0.99	0.86	0.69	0.50

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	DSX1 LED 60C 1000			
	1.0	0.98	0.96	0.91
	DSX1 LED 60C 700			
	1.0	0.99	0.99	0.99



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30C (30 LEDs)	530 mA	52 W	T1S	5,948	1	0	1	114	6,387	1	0	1	123	6,427	1	0	1	124	3,640	1	0	1	70
			T2S	6,132	1	0	1	118	6,585	2	0	2	127	6,626	2	0	2	127	3,813	1	0	1	73
			T2M	5,992	1	0	2	115	6,434	1	0	2	124	6,475	1	0	2	125	3,689	1	0	1	71
			T3S	5,985	1	0	1	115	6,427	1	0	2	124	6,467	1	0	2	124	3,770	1	0	1	73
			T3M	6,039	1	0	2	116	6,485	1	0	2	125	6,525	1	0	2	125	3,752	1	0	1	72
			T4M	6,121	1	0	2	118	6,573	1	0	2	126	6,614	1	0	2	127	3,758	1	0	1	72
			TFTM	6,030	1	0	2	116	6,475	1	0	2	125	6,515	1	0	2	125	3,701	1	0	1	71
			TSVS	6,370	2	0	0	123	6,840	2	0	0	132	6,883	2	0	0	132	3,928	2	0	0	76
			T5S	6,417	2	0	0	123	6,890	2	0	0	133	6,933	2	0	0	133	3,881	2	0	0	75
			T5M	6,428	3	0	1	124	6,902	3	0	1	133	6,945	3	0	1	134	3,930	2	0	1	76
			TSW	6,334	3	0	1	122	6,801	3	0	1	131	6,844	3	0	1	132	3,820	3	0	1	73
			BLC	4,735	1	0	1	91	5,085	1	0	2	98	5,116	1	0	1	98					
			LCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
			RCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
	700 mA	68 W	T1S	7,554	1	0	1	111	8,112	2	0	2	119	8,163	2	0	2	120	4,561	1	0	1	67
			T2S	7,789	2	0	2	115	8,364	2	0	2	123	8,416	2	0	2	124	4,777	1	0	1	70
			T2M	7,610	1	0	2	112	8,172	2	0	2	120	8,223	2	0	2	121	4,622	1	0	2	68
			T3S	7,601	1	0	2	112	8,162	2	0	2	120	8,213	2	0	2	121	4,724	1	0	1	69
			T3M	7,670	1	0	2	113	8,236	2	0	2	121	8,288	2	0	2	122	4,701	1	0	2	69
			T4M	7,774	1	0	2	114	8,348	2	0	2	123	8,400	2	0	2	124	4,709	1	0	2	69
			TFTM	7,658	1	0	2	113	8,223	1	0	2	121	8,275	1	0	2	122	4,638	1	0	2	68
			TSVS	8,090	2	0	0	119	8,687	3	0	1	128	8,742	3	0	1	129	4,922	2	0	0	72
			T5S	8,150	2	0	0	120	8,751	3	0	0	129	8,806	3	0	0	130	4,863	2	0	0	72
			T5M	8,164	3	0	1	120	8,767	3	0	2	129	8,821	3	0	2	130	4,924	3	0	1	72
			TSW	8,044	3	0	1	118	8,638	3	0	2	127	8,692	3	0	2	128	4,787	3	0	1	70
			BLC	6,028	1	0	2	89	6,473	1	0	2	95	6,514	1	0	2	96					
			LCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
			RCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
	1000 mA	105 W	T1S	10,331	2	0	2	98	11,094	2	0	2	106	11,163	2	0	2	106					
			T2S	10,652	2	0	2	101	11,438	2	0	2	109	11,510	2	0	2	110					
			T2M	10,408	2	0	2	99	11,176	2	0	3	106	11,246	2	0	3	107					
			T3S	10,395	2	0	2	99	11,163	2	0	2	106	11,233	2	0	2	107					
			T3M	10,490	2	0	2	100	11,264	2	0	2	107	11,335	2	0	2	108					
			T4M	10,632	2	0	2	101	11,417	2	0	2	109	11,488	2	0	2	109					
			TFTM	10,473	2	0	2	100	11,247	2	0	3	107	11,317	2	0	3	108					
			TSVS	11,064	3	0	1	105	11,881	3	0	1	113	11,955	3	0	1	114					
			T5S	11,145	3	0	1	106	11,968	3	0	1	114	12,043	3	0	1	115					
			T5M	11,165	3	0	2	106	11,989	4	0	2	114	12,064	4	0	2	115					
			TSW	11,001	3	0	2	105	11,813	4	0	2	113	11,887	4	0	2	113					
			BLC	7,960	1	0	2	76	8,548	1	0	2	81	8,601	1	0	2	82					
			LCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					
			RCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40C (40 LEDs)	530 mA	68 W	T1S	7,861	1	0	1	116	8,441	2	0	2	124	8,494	2	0	2	125	4,794	1	0	1	71
			T2S	8,105	2	0	2	119	8,704	2	0	2	128	8,758	2	0	2	129	5,021	1	0	1	74
			T2M	7,920	2	0	2	116	8,504	2	0	2	125	8,557	2	0	2	126	4,858	1	0	2	71
			T3S	7,910	1	0	2	116	8,494	2	0	2	125	8,547	2	0	2	126	4,966	1	0	1	73
			T3M	7,982	2	0	2	117	8,571	2	0	2	126	8,625	2	0	2	127	4,941	1	0	2	73
			T4M	8,090	1	0	2	119	8,687	2	0	2	128	8,741	2	0	2	129	4,950	1	0	2	73
			TFTM	7,969	1	0	2	117	8,558	2	0	2	126	8,611	2	0	2	127	4,875	1	0	2	72
			TSVS	8,419	2	0	0	124	9,040	3	0	1	133	9,097	3	0	1	134	5,174	2	0	0	76
			T5S	8,481	2	0	0	125	9,107	3	0	1	134	9,164	3	0	1	135	5,111	2	0	0	75
			T5M	8,496	3	0	1	125	9,123	3	0	2	134	9,180	3	0	2	135	5,175	3	0	1	76
			TSW	8,371	3	0	2	123	8,989	3	0	2	132	9,045	3	0	2	133	5,031	3	0	1	74
			BLC	6,255	1	0	2	92	6,717	1	0	2	99	6,759	1	0	2	99					
			LCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
			RCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
	700 mA	91 W	T1S	9,984	2	0	2	112	10,721	2	0	2	120	10,788	2	0	2	121	6,014	1	0	1	68
			T2S	10,294	2	0	2	116	11,054	2	0	2	124	11,123	2	0	2	125	6,299	2	0	2	71
			T2M	10,059	2	0	2	113	10,801	2	0	3	121	10,869	2	0	3	122	6,094	2	0	2	68
			T3S	10,046	2	0	2	113	10,788	2	0	2	121	10,855	2	0	2	122	6,229	1	0	2	70
			T3M	10,137	2	0	2	114	10,886	2	0	2	122	10,954	2	0	2	123	6,198	2	0	2	70
			T4M	10,275	2	0	2	115	11,033	2	0	2	124	11,102	2	0	2	125	6,209	1	0	2	70
			TFTM	10,122	2	0	2	114	10,869	2	0	2	122	10,937	2	0	2	123	6,115	1	0	2	69
			TSVS	10,693	3	0	1	120	11,482	3	0	1	129	11,554	3	0	1	130	6,490	2	0	0	73
			T5S	10,771	3	0	1	121	11,566	3	0	1	130	11,639	3	0	1	131	6,411	2	0	0	72
			T5M	10,790	3	0	2	121	11,587	4	0	2	130	11,659	4	0	2	131	6,492	3	0	1	73
			TSW	10,632	3	0	2	119	11,417	4	0	2	128	11,488	4	0	2	129	6,311	3	0	2	71
			BLC	7,963	1	0	2	89	8,551	1	0	2	96	8,605	1	0	2	97					
			LCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
			RCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
	1000 mA	138 W	T1S	13,655	2	0	2	99	14,663	3	0	3	106	14,754	3	0	3	107					
			T2S	14,079	2	0	2	102	15,118	3	0	3	110	15,212	3	0	3	110					
			T2M	13,756	2	0	3	100	14,772	3	0	3	107	14,864	3	0	3	108					
			T3S	13,739	2	0	2	100	14,754	2	0	2	107	14,846	3	0	3	108					
			T3M	13,864	2	0	2	100	14,888	3	0	3	108	14,981	3	0	3	109					
			T4M	14,052	2	0	2	102	15,090	3	0	3	109	15,184	3	0	3	110					
			TFTM	13,842	2	0	3	100	14,864	2	0	3	108	14,957	2	0	3	108					
			TSVS	14,623	3	0	1	106	15,703	4	0	1	114	15,801	4	0	1	115					
			T5S	14,731	3	0	1	107	15,818	3	0	1	115	15,917	3	0	1	115					
			T5M	14,757	4	0	2	107	15,846	4	0	2	115	15,945	4	0	2	116					
			TSW	14,540	4	0	2	105	15,614	4	0	2	113	15,711	4	0	2	114					
			BLC	10,516	1	0	2	76	11,292	1	0	2	82	11,363	1	0	2	82					
			LCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					
			RCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

L90 and R90 Rotated Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) or optional 3000 K (70 minimum CRI) or 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of 30, 40 or 60 high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L99/100,000 hours at

25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV or 6kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block, tool-less entry, and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





D-Series Size 1 LED Area Luminaire

d#series



Specifications


EPA: 1.01 ft²
(0.09 m²)

Length: 33"
(83.8 cm)

Width: 13"
(33.0 cm)

Height: 7-1/2"
(19.0 cm)

Weight (max): 27 lbs
(12.2 kg)

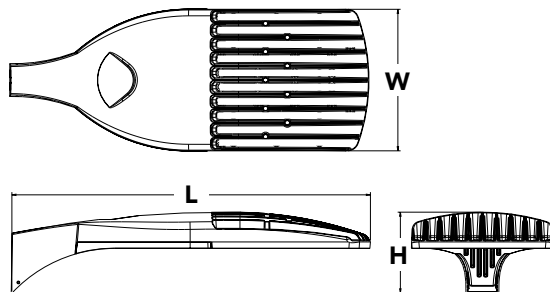

Catalog
Number

DSX1 LED 40C 530 50K BLC MVOLT SPA PIRH

Notes

Windsor School

Type

P1-BC

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment.

The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED 60C 1000 40K T3M MVOLT SPA DDBXD

DSX1LED							
Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	
DSX1 LED	Forward optics	530 530 mA	30K 3000 K	T1S Type I short	T5S Type V short	MVOLT ⁵	Shipped included
	30C 30 LEDs (one engine)	700 700 mA	40K 4000 K	T2S Type II short	T5M Type V medium	120 ⁵	SPA Square pole mounting
	40C 40 LEDs (two engines)	1000 1000 mA	50K 5000 K	T2M Type II medium	T5W Type V wide	208 ⁵	RPA Round pole mounting
	60C 60 LEDs (two engines)	(1 A) ²	AMBPC Amber phosphor converted ³	T3S Type III short	BLC Backlight control ^{2,4}	240 ⁵	WBA Wall bracket
	Rotated optics ¹			T3M Type III medium	LCCO Left corner cutoff ^{2,4}	277 ⁵	SPUMBA Square pole universal mounting adaptor ⁷
	60C 60 LEDs (two engines)			T4M Type IV medium	RCCO Right corner cutoff ^{2,4}	347 ⁶	RPUMBA Round pole universal mounting adaptor ⁷
				TFTM Forward throw medium		480 ⁶	Shipped separately
				T5VS Type V very short			KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸

Control options	Other options	Finish (required)
Shipped installed	Shipped installed	DDBXD Dark bronze
PER NEMA twist-lock receptacle only (no controls) ⁹	HS House-side shield ¹⁹	DBLXD Black
PER5 Five-wire receptacle only (no controls) ^{9,10}	WTB Utility terminal block ²⁰	DNAXD Natural aluminum
PER7 Seven-wire receptacle only (no controls) ^{9,10}	SF Single fuse (120, 277, 347V) ²¹	DWHXD White
DMG 0-10V dimming driver (no controls) ¹¹	DF Double fuse (208, 240, 480V) ²¹	DDBTXD Textured dark bronze
DCR Dimmable and controllable via ROAM [®] (no controls) ¹²	L90 Left rotated optics ²²	DBLBXD Textured black
DS Dual switching ^{13,14}	R90 Right rotated optics ²²	DNATXD Textured natural aluminum
PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ¹⁵	BS Bird spikes	DWHGXD Textured white
PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ¹⁵		
PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ¹⁵		

Accessories	Controls & Shields	NOTES
DL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³	DL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³	1 Rotated optics available with 60C only.
DL1347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³	DL1347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³	2 Not available AMBPC.
DL1480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³	DL1480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³	3 Only available with 530mA or 700mA.
DSHORT SBK U Shorting cap ²³	DSHORT SBK U Shorting cap ²³	4 Not available with HS.
DSX1HS 30C U House-side shield for 30 LED unit ¹⁹	DSX1HS 30C U House-side shield for 30 LED unit ¹⁹	5 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120V, 208V, 240V or 277V options only when ordering with fusing (SF, DF options).
DSX1HS 40C U House-side shield for 40 LED unit ¹⁹	DSX1HS 40C U House-side shield for 40 LED unit ¹⁹	6 Not available with single board, 530mA product (30C 530 or 60C 530 DS). Not available with BL30, BL50 or PNMT options.
DSX1HS 60C U House-side shield for 60 LED unit ¹⁹	DSX1HS 60C U House-side shield for 60 LED unit ¹⁹	7 Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴	PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴	8 Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	9 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option.
		10 If ROAM [®] node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming.
		11 DMG option for 347V or 480V requires 1000mA.
		12 Specifies a ROAM [®] enabled luminaire with 0-10V dimming capability; PER option required. Additional hardware and services required for ROAM [®] deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net. N/A with PIR options, DS, PER5, PER7, BL30, BL50 or PNMT options. Node without integral dimming.
		13 Requires 40C or 60C. Provides 50/50 luminaire operation via two independent drivers on two separate circuits. N/A with PER, DCR, WTB, PIR or PIRH.
		14 Requires an additional switched circuit.
		15 PIR and PIR1FC3V specify the SensorSwitch SBGR-10-ODP control; PIRH and PIRH1FC3V specify the SensorSwitch SBGR-6-ODP control; see Outdoor Control Technical Guide for details. Dimming driver standard. Not available with PER5 or PER7. Ambient sensor disabled when ordered with DCR. Separate on/off required.
		16 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7 or PNMT options. Not available with PIR1FC3V or PIRH1FC3V.
		17 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7, BL30 or BL50. Not available with PIR1FC3V or PIRH1FC3V. Separate on/off required.
		18 Dimming driver standard. Not available with PER5, PER7, DMG, DCR, DS, BL30, BL50 or PNMT, PIR, PIRH, PIR1FC3V or PIRH1FC3V.
		19 Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
		20 WTB not available with DS.
		21 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
		22 Available with 60 LEDs (60C option) only.
		23 Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item from Acuity Brands Controls.
		24 For retrofit use only.

For more control options, visit DTL and ROAM online.




One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2011-2016 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 10/19/16
Page 1 of 6

Drilling

Template #8

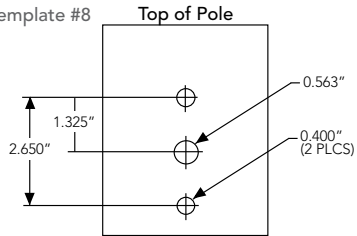

DSX1 shares a unique drilling pattern with the AERIS™ family. Specify this drilling pattern when specifying poles, per the table below.

DM19AS	Single unit	DM29AS	2 at 90°*
DM28AS	2 at 180°	DM39AS	3 at 90°*
DM49AS	4 at 90°*	DM32AS	3 at 120°**

Example: SSA 20 4C DM19AS DDBXD

Visit Lithonia Lighting's [POLES CENTRAL](#) to see our wide selection of poles, accessories and educational tools.

*Round pole top must be 3.25" O.D. minimum.

**For round pole mounting (RPA) only.


Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit [Lithonia Lighting's D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (20').

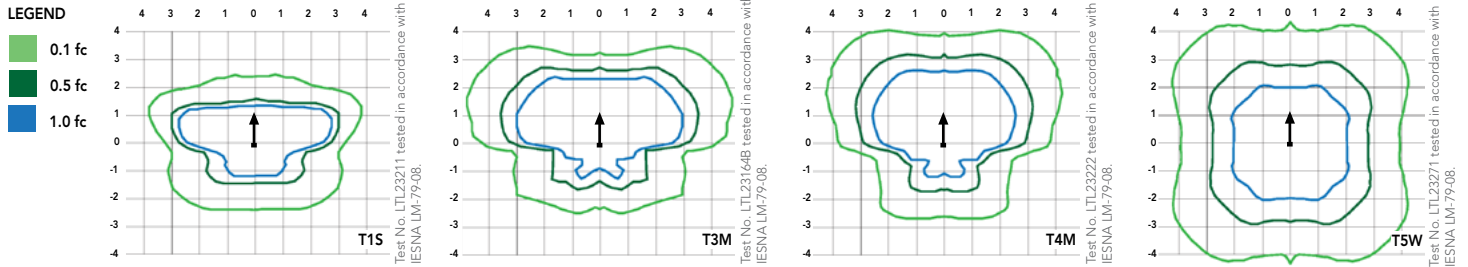

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Electrical Load

Number of LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
30	530	52	0.52	0.30	0.26	0.23	--	--
	700	68	0.68	0.39	0.34	0.30	0.24	0.17
	1000	105	1.03	0.59	0.51	0.45	0.36	0.26
40	530	68	0.67	0.39	0.34	0.29	0.23	0.17
	700	89	0.89	0.51	0.44	0.38	0.31	0.22
	1000	138	1.35	0.78	0.67	0.58	0.47	0.34
60	530	99	0.97	0.56	0.48	0.42	0.34	0.24
	700	131	1.29	0.74	0.65	0.56	0.45	0.32
	1000	209	1.98	1.14	0.99	0.86	0.69	0.50

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	DSX1 LED 60C 1000			
	1.0	0.98	0.96	0.91
	DSX1 LED 60C 700			
	1.0	0.99	0.99	0.99

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30C (30 LEDs)	530 mA	52 W	T1S	5,948	1	0	1	114	6,387	1	0	1	123	6,427	1	0	1	124	3,640	1	0	1	70
			T2S	6,132	1	0	1	118	6,585	2	0	2	127	6,626	2	0	2	127	3,813	1	0	1	73
			T2M	5,992	1	0	2	115	6,434	1	0	2	124	6,475	1	0	2	125	3,689	1	0	1	71
			T3S	5,985	1	0	1	115	6,427	1	0	2	124	6,467	1	0	2	124	3,770	1	0	1	73
			T3M	6,039	1	0	2	116	6,485	1	0	2	125	6,525	1	0	2	125	3,752	1	0	1	72
			T4M	6,121	1	0	2	118	6,573	1	0	2	126	6,614	1	0	2	127	3,758	1	0	1	72
			TFTM	6,030	1	0	2	116	6,475	1	0	2	125	6,515	1	0	2	125	3,701	1	0	1	71
			TSVS	6,370	2	0	0	123	6,840	2	0	0	132	6,883	2	0	0	132	3,928	2	0	0	76
			T5S	6,417	2	0	0	123	6,890	2	0	0	133	6,933	2	0	0	133	3,881	2	0	0	75
			T5M	6,428	3	0	1	124	6,902	3	0	1	133	6,945	3	0	1	134	3,930	2	0	1	76
			TSW	6,334	3	0	1	122	6,801	3	0	1	131	6,844	3	0	1	132	3,820	3	0	1	73
			BLC	4,735	1	0	1	91	5,085	1	0	2	98	5,116	1	0	1	98					
			LCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
			RCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
	700 mA	68 W	T1S	7,554	1	0	1	111	8,112	2	0	2	119	8,163	2	0	2	120	4,561	1	0	1	67
			T2S	7,789	2	0	2	115	8,364	2	0	2	123	8,416	2	0	2	124	4,777	1	0	1	70
			T2M	7,610	1	0	2	112	8,172	2	0	2	120	8,223	2	0	2	121	4,622	1	0	2	68
			T3S	7,601	1	0	2	112	8,162	2	0	2	120	8,213	2	0	2	121	4,724	1	0	1	69
			T3M	7,670	1	0	2	113	8,236	2	0	2	121	8,288	2	0	2	122	4,701	1	0	2	69
			T4M	7,774	1	0	2	114	8,348	2	0	2	123	8,400	2	0	2	124	4,709	1	0	2	69
			TFTM	7,658	1	0	2	113	8,223	1	0	2	121	8,275	1	0	2	122	4,638	1	0	2	68
			TSVS	8,090	2	0	0	119	8,687	3	0	1	128	8,742	3	0	1	129	4,922	2	0	0	72
			T5S	8,150	2	0	0	120	8,751	3	0	0	129	8,806	3	0	0	130	4,863	2	0	0	72
			T5M	8,164	3	0	1	120	8,767	3	0	2	129	8,821	3	0	2	130	4,924	3	0	1	72
			TSW	8,044	3	0	1	118	8,638	3	0	2	127	8,692	3	0	2	128	4,787	3	0	1	70
			BLC	6,028	1	0	2	89	6,473	1	0	2	95	6,514	1	0	2	96					
			LCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
			RCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
	1000 mA	105 W	T1S	10,331	2	0	2	98	11,094	2	0	2	106	11,163	2	0	2	106					
			T2S	10,652	2	0	2	101	11,438	2	0	2	109	11,510	2	0	2	110					
			T2M	10,408	2	0	2	99	11,176	2	0	3	106	11,246	2	0	3	107					
			T3S	10,395	2	0	2	99	11,163	2	0	2	106	11,233	2	0	2	107					
			T3M	10,490	2	0	2	100	11,264	2	0	2	107	11,335	2	0	2	108					
			T4M	10,632	2	0	2	101	11,417	2	0	2	109	11,488	2	0	2	109					
			TFTM	10,473	2	0	2	100	11,247	2	0	3	107	11,317	2	0	3	108					
			TSVS	11,064	3	0	1	105	11,881	3	0	1	113	11,955	3	0	1	114					
			T5S	11,145	3	0	1	106	11,968	3	0	1	114	12,043	3	0	1	115					
			T5M	11,165	3	0	2	106	11,989	4	0	2	114	12,064	4	0	2	115					
			TSW	11,001	3	0	2	105	11,813	4	0	2	113	11,887	4	0	2	113					
			BLC	7,960	1	0	2	76	8,548	1	0	2	81	8,601	1	0	2	82					
			LCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					
			RCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40C (40 LEDs)	530 mA	68 W	T1S	7,861	1	0	1	116	8,441	2	0	2	124	8,494	2	0	2	125	4,794	1	0	1	71
			T2S	8,105	2	0	2	119	8,704	2	0	2	128	8,758	2	0	2	129	5,021	1	0	1	74
			T2M	7,920	2	0	2	116	8,504	2	0	2	125	8,557	2	0	2	126	4,858	1	0	2	71
			T3S	7,910	1	0	2	116	8,494	2	0	2	125	8,547	2	0	2	126	4,966	1	0	1	73
			T3M	7,982	2	0	2	117	8,571	2	0	2	126	8,625	2	0	2	127	4,941	1	0	2	73
			T4M	8,090	1	0	2	119	8,687	2	0	2	128	8,741	2	0	2	129	4,950	1	0	2	73
			TFTM	7,969	1	0	2	117	8,558	2	0	2	126	8,611	2	0	2	127	4,875	1	0	2	72
			TSVS	8,419	2	0	0	124	9,040	3	0	1	133	9,097	3	0	1	134	5,174	2	0	0	76
			T5S	8,481	2	0	0	125	9,107	3	0	1	134	9,164	3	0	1	135	5,111	2	0	0	75
			T5M	8,496	3	0	1	125	9,123	3	0	2	134	9,180	3	0	2	135	5,175	3	0	1	76
			TSW	8,371	3	0	2	123	8,989	3	0	2	132	9,045	3	0	2	133	5,031	3	0	1	74
			BLC	6,255	1	0	2	92	6,717	1	0	2	99	6,759	1	0	2	99					
			LCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
			RCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
	700 mA	91 W	T1S	9,984	2	0	2	112	10,721	2	0	2	120	10,788	2	0	2	121	6,014	1	0	1	68
			T2S	10,294	2	0	2	116	11,054	2	0	2	124	11,123	2	0	2	125	6,299	2	0	2	71
			T2M	10,059	2	0	2	113	10,801	2	0	3	121	10,869	2	0	3	122	6,094	2	0	2	68
			T3S	10,046	2	0	2	113	10,788	2	0	2	121	10,855	2	0	2	122	6,229	1	0	2	70
			T3M	10,137	2	0	2	114	10,886	2	0	2	122	10,954	2	0	2	123	6,198	2	0	2	70
			T4M	10,275	2	0	2	115	11,033	2	0	2	124	11,102	2	0	2	125	6,209	1	0	2	70
			TFTM	10,122	2	0	2	114	10,869	2	0	2	122	10,937	2	0	2	123	6,115	1	0	2	69
			TSVS	10,693	3	0	1	120	11,482	3	0	1	129	11,554	3	0	1	130	6,490	2	0	0	73
			T5S	10,771	3	0	1	121	11,566	3	0	1	130	11,639	3	0	1	131	6,411	2	0	0	72
			T5M	10,790	3	0	2	121	11,587	4	0	2	130	11,659	4	0	2	131	6,492	3	0	1	73
			TSW	10,632	3	0	2	119	11,417	4	0	2	128	11,488	4	0	2	129	6,311	3	0	2	71
			BLC	7,963	1	0	2	89	8,551	1	0	2	96	8,605	1	0	2	97					
			LCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
			RCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
	1000 mA	138 W	T1S	13,655	2	0	2	99	14,663	3	0	3	106	14,754	3	0	3	107					
			T2S	14,079	2	0	2	102	15,118	3	0	3	110	15,212	3	0	3	110					
			T2M	13,756	2	0	3	100	14,772	3	0	3	107	14,864	3	0	3	108					
			T3S	13,739	2	0	2	100	14,754	2	0	2	107	14,846	3	0	3	108					
			T3M	13,864	2	0	2	100	14,888	3	0	3	108	14,981	3	0	3	109					
			T4M	14,052	2	0	2	102	15,090	3	0	3	109	15,184	3	0	3	110					
			TFTM	13,842	2	0	3	100	14,864	2	0	3	108	14,957	2	0	3	108					
			TSVS	14,623	3	0	1	106	15,703	4	0	1	114	15,801	4	0	1	115					
			T5S	14,731	3	0	1	107	15,818	3	0	1	115	15,917	3	0	1	115					
			T5M	14,757	4	0	2	107	15,846	4	0	2	115	15,945	4	0	2	116					
			TSW	14,540	4	0	2	105	15,614	4	0	2	113	15,711	4	0	2	114					
			BLC	10,516	1	0	2	76	11,292	1	0	2	82	11,363	1	0	2	82					
			LCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					
			RCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

L90 and R90 Rotated Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) or optional 3000 K (70 minimum CRI) or 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of 30, 40 or 60 high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L99/100,000 hours at

25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV or 6kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block, tool-less entry, and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





D-Series Size 1 LED Area Luminaire

d#series



Specifications


EPA: 1.01 ft²
(0.09 m²)

Length: 33"
(83.8 cm)

Width: 13"
(33.0 cm)

Height: 7-1/2"
(19.0 cm)

Weight (max): 27 lbs
(12.2 kg)

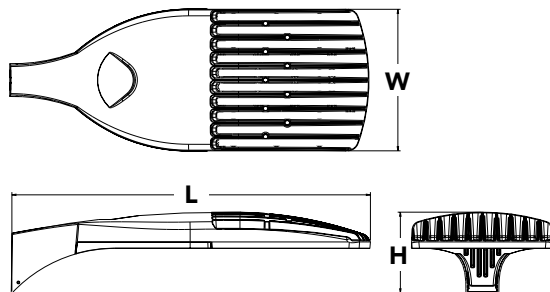

Catalog Number **DSX1 LED 60C 700 50K (1-T3M/1-T4M) MVOLT SPA PIRH**

Notes
Windsor School

Type
P2

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment.

The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED 60C 1000 40K T3M MVOLT SPA DDBXD

DSX1LED							
Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	
DSX1 LED	Forward optics	530 530 mA	30K 3000 K	T1S Type I short	T5S Type V short	MVOLT ⁵	Shipped included
	30C 30 LEDs (one engine)	700 700 mA	40K 4000 K	T2S Type II short	T5M Type V medium	120 ⁵	SPA Square pole mounting
	40C 40 LEDs (two engines)	1000 1000 mA	50K 5000 K	T2M Type II medium	T5W Type V wide	208 ⁵	RPA Round pole mounting
	60C 60 LEDs (two engines)	(1 A) ²	AMBPC Amber phosphor converted ³	T3S Type III short	BLC Backlight control ^{2,4}	240 ⁵	WBA Wall bracket
	Rotated optics ¹			T3M Type III medium	LCCO Left corner cutoff ^{2,4}	277 ⁵	SPUMBA Square pole universal mounting adaptor ⁷
	60C 60 LEDs (two engines)			T4M Type IV medium	RCCO Right corner cutoff ^{2,4}	347 ⁶	RPUMBA Round pole universal mounting adaptor ⁷
				TFTM Forward throw medium		480 ⁶	Shipped separately
				T5VS Type V very short			KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸

Control options	Other options	Finish (required)
Shipped installed PER NEMA twist-lock receptacle only (no controls) ⁹ PER5 Five-wire receptacle only (no controls) ^{9,10} PER7 Seven-wire receptacle only (no controls) ^{9,10} DMG 0-10V dimming driver (no controls) ¹¹ DCR Dimmable and controllable via ROAM [®] (no controls) ¹² DS Dual switching ^{13,14} PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ¹⁵ PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ¹⁵ PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ¹⁵	Shipped installed HS House-side shield ¹⁹ WTB Utility terminal block ²⁰ SF Single fuse (120, 277, 347V) ²¹ DF Double fuse (208, 240, 480V) ²¹ L90 Left rotated optics ²² R90 Right rotated optics ²² BS Bird spikes	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white

Accessories	Controls & Shields	NOTES	
Ordered and shipped separately.	DLL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³ DLL347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³ DLL480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³ DSHORT SBK U Shorting cap ²³ DSX1HS 30C U House-side shield for 30 LED unit ¹⁹ DSX1HS 40C U House-side shield for 40 LED unit ¹⁹ DSX1HS 60C U House-side shield for 60 LED unit ¹⁹ PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴ KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	1 Rotated optics available with 60C only. 2 Not available AMBPC. 3 Only available with 530mA or 700mA. 4 Not available with HS. 5 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120V, 208V, 240V or 277V options only when ordering with fusing (SF, DF options). 6 Not available with single board, 530mA product (30C 530 or 60C 530 DS). Not available with BL30, BL50 or PNMT options. 7 Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31. 8 Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included). 9 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. 10 If ROAM [®] node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming. 11 DMG option for 347V or 480V requires 1000mA. 12 Specifies a ROAM [®] enabled luminaire with 0-10V dimming capability; PER option required. Additional hardware and services required for ROAM [®] deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net. N/A with PIR options, DS, PER5, PER7, BL30, BL50 or PNMT options. Node without integral dimming.	13 Requires 40C or 60C. Provides 50/50 luminaire operation via two independent drivers on two separate circuits. N/A with PER, DCR, WTB, PIR or PIRH. 14 Requires an additional switched circuit. 15 PIR and PIR1FC3V specify the SensorSwitch SBGR-10-ODP control; PIRH and PIRH1FC3V specify the SensorSwitch SBGR-6-ODP control; see Outdoor Control Technical Guide for details. Dimming driver standard. Not available with PER5 or PER7. Ambient sensor disabled when ordered with DCR. Separate on/off required. 16 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7 or PNMT options. Not available with PIR1FC3V or PIRH1FC3V. 17 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7, BL30 or BL50. Not available with PIR1FC3V or PIRH1FC3V. Separate on/off required. 18 Dimming driver standard. Not available with PER5, PER7, DMG, DCR, DS, BL30, BL50 or PNMT, PIR, PIRH, PIR1FC3V or PIRH1FC3V. 19 Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information. 20 WTB not available with DS. 21 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V. 22 Available with 60 LEDs (60C option) only. 23 Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item from Acuity Brands Controls. 24 For retrofit use only.

For more control options, visit [DTL](#) and [ROAM](#) online.




One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2011-2016 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 10/19/16
Page 1 of 6

Drilling

Template #8

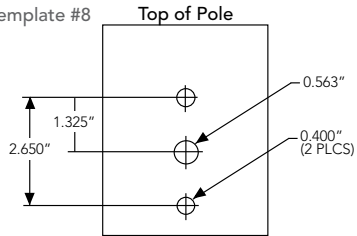

DSX1 shares a unique drilling pattern with the AERIS™ family. Specify this drilling pattern when specifying poles, per the table below.

DM19AS	Single unit	DM29AS	2 at 90°*
DM28AS	2 at 180°	DM39AS	3 at 90°*
DM49AS	4 at 90°*	DM32AS	3 at 120°**

Example: SSA 20 4C DM19AS DDBXD

Visit Lithonia Lighting's [POLES CENTRAL](#) to see our wide selection of poles, accessories and educational tools.

*Round pole top must be 3.25" O.D. minimum.

**For round pole mounting (RPA) only.


Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit [Lithonia Lighting's D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (20').

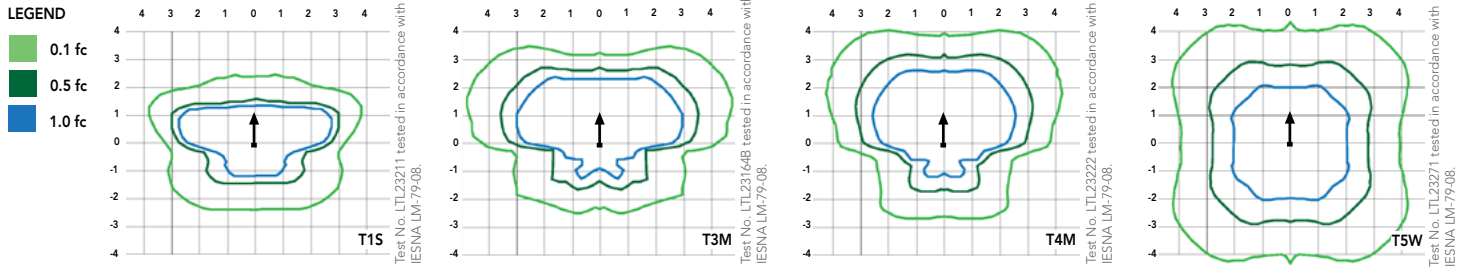

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Electrical Load

Number of LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
30	530	52	0.52	0.30	0.26	0.23	--	--
	700	68	0.68	0.39	0.34	0.30	0.24	0.17
	1000	105	1.03	0.59	0.51	0.45	0.36	0.26
40	530	68	0.67	0.39	0.34	0.29	0.23	0.17
	700	89	0.89	0.51	0.44	0.38	0.31	0.22
	1000	138	1.35	0.78	0.67	0.58	0.47	0.34
60	530	99	0.97	0.56	0.48	0.42	0.34	0.24
	700	131	1.29	0.74	0.65	0.56	0.45	0.32
	1000	209	1.98	1.14	0.99	0.86	0.69	0.50

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	DSX1 LED 60C 1000			
	1.0	0.98	0.96	0.91
	DSX1 LED 60C 700			
	1.0	0.99	0.99	0.99

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30C (30 LEDs)	530 mA	52 W	T1S	5,948	1	0	1	114	6,387	1	0	1	123	6,427	1	0	1	124	3,640	1	0	1	70
			T2S	6,132	1	0	1	118	6,585	2	0	2	127	6,626	2	0	2	127	3,813	1	0	1	73
			T2M	5,992	1	0	2	115	6,434	1	0	2	124	6,475	1	0	2	125	3,689	1	0	1	71
			T3S	5,985	1	0	1	115	6,427	1	0	2	124	6,467	1	0	2	124	3,770	1	0	1	73
			T3M	6,039	1	0	2	116	6,485	1	0	2	125	6,525	1	0	2	125	3,752	1	0	1	72
			T4M	6,121	1	0	2	118	6,573	1	0	2	126	6,614	1	0	2	127	3,758	1	0	1	72
			TFTM	6,030	1	0	2	116	6,475	1	0	2	125	6,515	1	0	2	125	3,701	1	0	1	71
			TSVS	6,370	2	0	0	123	6,840	2	0	0	132	6,883	2	0	0	132	3,928	2	0	0	76
			T5S	6,417	2	0	0	123	6,890	2	0	0	133	6,933	2	0	0	133	3,881	2	0	0	75
			T5M	6,428	3	0	1	124	6,902	3	0	1	133	6,945	3	0	1	134	3,930	2	0	1	76
			TSW	6,334	3	0	1	122	6,801	3	0	1	131	6,844	3	0	1	132	3,820	3	0	1	73
			BLC	4,735	1	0	1	91	5,085	1	0	2	98	5,116	1	0	1	98					
			LCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
			RCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
	700 mA	68 W	T1S	7,554	1	0	1	111	8,112	2	0	2	119	8,163	2	0	2	120	4,561	1	0	1	67
			T2S	7,789	2	0	2	115	8,364	2	0	2	123	8,416	2	0	2	124	4,777	1	0	1	70
			T2M	7,610	1	0	2	112	8,172	2	0	2	120	8,223	2	0	2	121	4,622	1	0	2	68
			T3S	7,601	1	0	2	112	8,162	2	0	2	120	8,213	2	0	2	121	4,724	1	0	1	69
			T3M	7,670	1	0	2	113	8,236	2	0	2	121	8,288	2	0	2	122	4,701	1	0	2	69
			T4M	7,774	1	0	2	114	8,348	2	0	2	123	8,400	2	0	2	124	4,709	1	0	2	69
			TFTM	7,658	1	0	2	113	8,223	1	0	2	121	8,275	1	0	2	122	4,638	1	0	2	68
			TSVS	8,090	2	0	0	119	8,687	3	0	1	128	8,742	3	0	1	129	4,922	2	0	0	72
			T5S	8,150	2	0	0	120	8,751	3	0	0	129	8,806	3	0	0	130	4,863	2	0	0	72
			T5M	8,164	3	0	1	120	8,767	3	0	2	129	8,821	3	0	2	130	4,924	3	0	1	72
			TSW	8,044	3	0	1	118	8,638	3	0	2	127	8,692	3	0	2	128	4,787	3	0	1	70
			BLC	6,028	1	0	2	89	6,473	1	0	2	95	6,514	1	0	2	96					
			LCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
			RCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
	1000 mA	105 W	T1S	10,331	2	0	2	98	11,094	2	0	2	106	11,163	2	0	2	106					
			T2S	10,652	2	0	2	101	11,438	2	0	2	109	11,510	2	0	2	110					
			T2M	10,408	2	0	2	99	11,176	2	0	3	106	11,246	2	0	3	107					
			T3S	10,395	2	0	2	99	11,163	2	0	2	106	11,233	2	0	2	107					
			T3M	10,490	2	0	2	100	11,264	2	0	2	107	11,335	2	0	2	108					
			T4M	10,632	2	0	2	101	11,417	2	0	2	109	11,488	2	0	2	109					
			TFTM	10,473	2	0	2	100	11,247	2	0	3	107	11,317	2	0	3	108					
			TSVS	11,064	3	0	1	105	11,881	3	0	1	113	11,955	3	0	1	114					
			T5S	11,145	3	0	1	106	11,968	3	0	1	114	12,043	3	0	1	115					
			T5M	11,165	3	0	2	106	11,989	4	0	2	114	12,064	4	0	2	115					
			TSW	11,001	3	0	2	105	11,813	4	0	2	113	11,887	4	0	2	113					
			BLC	7,960	1	0	2	76	8,548	1	0	2	81	8,601	1	0	2	82					
			LCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					
			RCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40C (40 LEDs)	530 mA	68 W	T1S	7,861	1	0	1	116	8,441	2	0	2	124	8,494	2	0	2	125	4,794	1	0	1	71
			T2S	8,105	2	0	2	119	8,704	2	0	2	128	8,758	2	0	2	129	5,021	1	0	1	74
			T2M	7,920	2	0	2	116	8,504	2	0	2	125	8,557	2	0	2	126	4,858	1	0	2	71
			T3S	7,910	1	0	2	116	8,494	2	0	2	125	8,547	2	0	2	126	4,966	1	0	1	73
			T3M	7,982	2	0	2	117	8,571	2	0	2	126	8,625	2	0	2	127	4,941	1	0	2	73
			T4M	8,090	1	0	2	119	8,687	2	0	2	128	8,741	2	0	2	129	4,950	1	0	2	73
			TFTM	7,969	1	0	2	117	8,558	2	0	2	126	8,611	2	0	2	127	4,875	1	0	2	72
			TSVS	8,419	2	0	0	124	9,040	3	0	1	133	9,097	3	0	1	134	5,174	2	0	0	76
			T5S	8,481	2	0	0	125	9,107	3	0	1	134	9,164	3	0	1	135	5,111	2	0	0	75
			T5M	8,496	3	0	1	125	9,123	3	0	2	134	9,180	3	0	2	135	5,175	3	0	1	76
			TSW	8,371	3	0	2	123	8,989	3	0	2	132	9,045	3	0	2	133	5,031	3	0	1	74
			BLC	6,255	1	0	2	92	6,717	1	0	2	99	6,759	1	0	2	99					
			LCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
			RCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
	700 mA	91 W	T1S	9,984	2	0	2	112	10,721	2	0	2	120	10,788	2	0	2	121	6,014	1	0	1	68
			T2S	10,294	2	0	2	116	11,054	2	0	2	124	11,123	2	0	2	125	6,299	2	0	2	71
			T2M	10,059	2	0	2	113	10,801	2	0	3	121	10,869	2	0	3	122	6,094	2	0	2	68
			T3S	10,046	2	0	2	113	10,788	2	0	2	121	10,855	2	0	2	122	6,229	1	0	2	70
			T3M	10,137	2	0	2	114	10,886	2	0	2	122	10,954	2	0	2	123	6,198	2	0	2	70
			T4M	10,275	2	0	2	115	11,033	2	0	2	124	11,102	2	0	2	125	6,209	1	0	2	70
			TFTM	10,122	2	0	2	114	10,869	2	0	2	122	10,937	2	0	2	123	6,115	1	0	2	69
			TSVS	10,693	3	0	1	120	11,482	3	0	1	129	11,554	3	0	1	130	6,490	2	0	0	73
			T5S	10,771	3	0	1	121	11,566	3	0	1	130	11,639	3	0	1	131	6,411	2	0	0	72
			T5M	10,790	3	0	2	121	11,587	4	0	2	130	11,659	4	0	2	131	6,492	3	0	1	73
			TSW	10,632	3	0	2	119	11,417	4	0	2	128	11,488	4	0	2	129	6,311	3	0	2	71
			BLC	7,963	1	0	2	89	8,551	1	0	2	96	8,605	1	0	2	97					
			LCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
			RCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
	1000 mA	138 W	T1S	13,655	2	0	2	99	14,663	3	0	3	106	14,754	3	0	3	107					
			T2S	14,079	2	0	2	102	15,118	3	0	3	110	15,212	3	0	3	110					
			T2M	13,756	2	0	3	100	14,772	3	0	3	107	14,864	3	0	3	108					
			T3S	13,739	2	0	2	100	14,754	2	0	2	107	14,846	3	0	3	108					
			T3M	13,864	2	0	2	100	14,888	3	0	3	108	14,981	3	0	3	109					
			T4M	14,052	2	0	2	102	15,090	3	0	3	109	15,184	3	0	3	110					
			TFTM	13,842	2	0	3	100	14,864	2	0	3	108	14,957	2	0	3	108					
			TSVS	14,623	3	0	1	106	15,703	4	0	1	114	15,801	4	0	1	115					
			T5S	14,731	3	0	1	107	15,818	3	0	1	115	15,917	3	0	1	115					
			T5M	14,757	4	0	2	107	15,846	4	0	2	115	15,945	4	0	2	116					
			TSW	14,540	4	0	2	105	15,614	4	0	2	113	15,711	4	0	2	114					
			BLC	10,516	1	0	2	76	11,292	1	0	2	82	11,363	1	0	2	82					
			LCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					
			RCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

L90 and R90 Rotated Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) or optional 3000 K (70 minimum CRI) or 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of 30, 40 or 60 high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L99/100,000 hours at

25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV or 6kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block, tool-less entry, and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





D-Series Size 1 LED Area Luminaire

d#series



Specifications


EPA: 1.01 ft²
(0.09 m²)

Length: 33"
(83.8 cm)

Width: 13"
(33.0 cm)

Height: 7-1/2"
(19.0 cm)

Weight (max): 27 lbs
(12.2 kg)

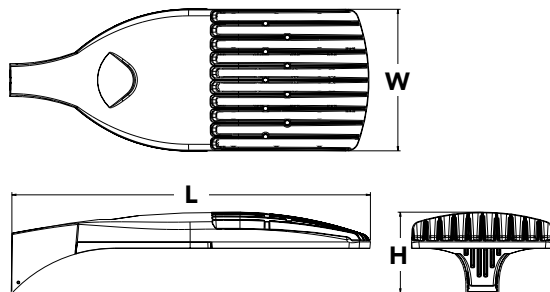

Catalog Number	DSX1 LED 60C 1000 50K T3M MVOLT SPA PIRH
Notes	Windsor School
Type	P3

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment.

The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire. The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED 60C 1000 40K T3M MVOLT SPA DDBXD

DSX1LED							
Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	
DSX1 LED	Forward optics	530 530 mA	30K 3000 K	T1S Type I short	T5S Type V short	MVOLT ⁵	Shipped included
	30C 30 LEDs (one engine)	700 700 mA	40K 4000 K	T2S Type II short	T5M Type V medium	120 ⁵	SPA Square pole mounting
	40C 40 LEDs (two engines)	1000 1000 mA (1 A) ²	50K 5000 K	T2M Type II medium	T5W Type V wide	208 ⁵	RPA Round pole mounting
	60C 60 LEDs (two engines)		AMBPC Amber phosphor converted ³	T3S Type III short	BLC Backlight control ^{2,4}	240 ⁵	WBA Wall bracket
	Rotated optics¹			T3M Type III medium		277 ⁵	SPUMBA Square pole universal mounting adaptor ⁷
	60C 60 LEDs (two engines)			T4M Type IV medium	LCCO Left corner cutoff ^{2,4}	347 ⁶	RPUMBA Round pole universal mounting adaptor ⁷
				TFTM Forward throw medium	RCCO Right corner cutoff ^{2,4}	480 ⁶	Shipped separately
				T5VS Type V very short			KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸

Control options	Other options	Finish (required)
Shipped installed	Shipped installed	DDBXD Dark bronze
PER NEMA twist-lock receptacle only (no controls) ⁹	HS House-side shield ¹⁹	DBLXD Black
PER5 Five-wire receptacle only (no controls) ^{9,10}	WTB Utility terminal block ²⁰	DNAXD Natural aluminum
PER7 Seven-wire receptacle only (no controls) ^{9,10}	SF Single fuse (120, 277, 347V) ²¹	DWHXD White
DMG 0-10V dimming driver (no controls) ¹¹	DF Double fuse (208, 240, 480V) ²¹	DDBTXD Textured dark bronze
DCR Dimmable and controllable via ROAM [®] (no controls) ¹²	L90 Left rotated optics ²²	DBLBXD Textured black
DS Dual switching ^{13,14}	R90 Right rotated optics ²²	DNATXD Textured natural aluminum
PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ¹⁵	BS Bird spikes	DWHGXD Textured white
PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ¹⁵		
PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ¹⁵		

Accessories	Controls & Shields	NOTES	
DL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³	DL127F 1.5 JU Photocell - SSL twist-lock (120-277V) ²³	1 Rotated optics available with 60C only.	13 Requires 40C or 60C. Provides 50/50 luminaire operation via two independent drivers on two separate circuits. N/A with PER, DCR, WTB, PIR or PIRH.
DL1347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³	DL1347F 1.5 CUL JU Photocell - SSL twist-lock (347V) ²³	2 Not available AMBPC.	14 Requires an additional switched circuit.
DL1480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³	DL1480F 1.5 CUL JU Photocell - SSL twist-lock (480V) ²³	3 Only available with 530mA or 700mA.	15 PIR and PIR1FC3V specify the SensorSwitch SBGR-10-ODP control; PIRH and PIRH1FC3V specify the SensorSwitch SBGR-6-ODP control; see Outdoor Control Technical Guide for details. Dimming driver standard. Not available with PER5 or PER7. Ambient sensor disabled when ordered with DCR. Separate on/off required.
DSHORT SBK U Shorting cap ²³	DSHORT SBK U Shorting cap ²³	4 Not available with HS.	16 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7 or PNMT options. Not available with PIR1FC3V or PIRH1FC3V.
DSX1HS 30C U House-side shield for 30 LED unit ¹⁹	DSX1HS 30C U House-side shield for 30 LED unit ¹⁹	5 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120V, 208V, 240V or 277V options only when ordering with fusing (SF, DF options).	17 Dimming driver standard. MVOLT only. Not available with 347V, 480V, DCR, DS, PER5, PER7, BL30 or BL50. Not available with PIR1FC3V or PIRH1FC3V. Separate on/off required.
DSX1HS 40C U House-side shield for 40 LED unit ¹⁹	DSX1HS 40C U House-side shield for 40 LED unit ¹⁹	6 Not available with single board, 530mA product (30C 530 or 60C 530 DS). Not available with BL30, BL50 or PNMT options.	18 Dimming driver standard. Not available with PER5, PER7, DMG, DCR, DS, BL30, BL50 or PNMT, PIR, PIRH, PIR1FC3V or PIRH1FC3V.
DSX1HS 60C U House-side shield for 60 LED unit ¹⁹	DSX1HS 60C U House-side shield for 60 LED unit ¹⁹	7 Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.	19 Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴	PUMBA DDBXD U* Square and round pole universal mounting bracket (specify finish) ²⁴	8 Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).	20 WTB not available with DS.
KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁸	9 Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option.	21 Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
		10 If ROAM [®] node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming.	22 Available with 60 LEDs (60C option) only.
		11 DMG option for 347V or 480V requires 1000mA.	23 Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item from Acuity Brands Controls.
		12 Specifies a ROAM [®] enabled luminaire with 0-10V dimming capability; PER option required. Additional hardware and services required for ROAM [®] deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net. N/A with PIR options, DS, PER5, PER7, BL30, BL50 or PNMT options. Node without integral dimming.	24 For retrofit use only.

For more control options, visit [DTL](#) and [ROAM](#) online.




One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2011-2016 Acuity Brands Lighting, Inc. All rights reserved.

DSX1-LED
Rev. 10/19/16
Page 1 of 6

Drilling

Template #8

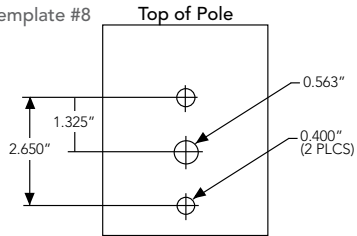

DSX1 shares a unique drilling pattern with the AERIS™ family. Specify this drilling pattern when specifying poles, per the table below.

DM19AS	Single unit	DM29AS	2 at 90°*
DM28AS	2 at 180°	DM39AS	3 at 90°*
DM49AS	4 at 90°*	DM32AS	3 at 120°**

Example: SSA 20 4C DM19AS DDBXD

Visit Lithonia Lighting's [POLES CENTRAL](#) to see our wide selection of poles, accessories and educational tools.

*Round pole top must be 3.25" O.D. minimum.

**For round pole mounting (RPA) only.


Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit [Lithonia Lighting's D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (20').

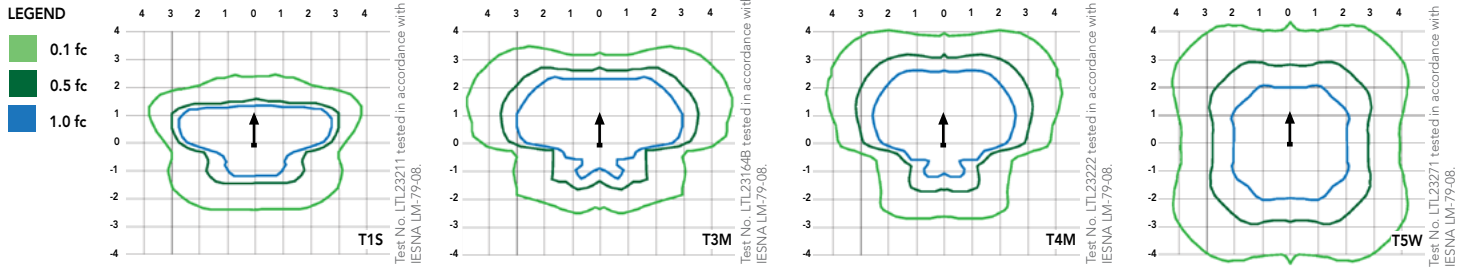

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.99

Electrical Load

Number of LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
30	530	52	0.52	0.30	0.26	0.23	--	--
	700	68	0.68	0.39	0.34	0.30	0.24	0.17
	1000	105	1.03	0.59	0.51	0.45	0.36	0.26
40	530	68	0.67	0.39	0.34	0.29	0.23	0.17
	700	89	0.89	0.51	0.44	0.38	0.31	0.22
	1000	138	1.35	0.78	0.67	0.58	0.47	0.34
60	530	99	0.97	0.56	0.48	0.42	0.34	0.24
	700	131	1.29	0.74	0.65	0.56	0.45	0.32
	1000	209	1.98	1.14	0.99	0.86	0.69	0.50

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	DSX1 LED 60C 1000			
	1.0	0.98	0.96	0.91
	DSX1 LED 60C 700			
	1.0	0.99	0.99	0.99

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30C (30 LEDs)	530 mA	52 W	T1S	5,948	1	0	1	114	6,387	1	0	1	123	6,427	1	0	1	124	3,640	1	0	1	70
			T2S	6,132	1	0	1	118	6,585	2	0	2	127	6,626	2	0	2	127	3,813	1	0	1	73
			T2M	5,992	1	0	2	115	6,434	1	0	2	124	6,475	1	0	2	125	3,689	1	0	1	71
			T3S	5,985	1	0	1	115	6,427	1	0	2	124	6,467	1	0	2	124	3,770	1	0	1	73
			T3M	6,039	1	0	2	116	6,485	1	0	2	125	6,525	1	0	2	125	3,752	1	0	1	72
			T4M	6,121	1	0	2	118	6,573	1	0	2	126	6,614	1	0	2	127	3,758	1	0	1	72
			TFTM	6,030	1	0	2	116	6,475	1	0	2	125	6,515	1	0	2	125	3,701	1	0	1	71
			TSVS	6,370	2	0	0	123	6,840	2	0	0	132	6,883	2	0	0	132	3,928	2	0	0	76
			T5S	6,417	2	0	0	123	6,890	2	0	0	133	6,933	2	0	0	133	3,881	2	0	0	75
			T5M	6,428	3	0	1	124	6,902	3	0	1	133	6,945	3	0	1	134	3,930	2	0	1	76
			TSW	6,334	3	0	1	122	6,801	3	0	1	131	6,844	3	0	1	132	3,820	3	0	1	73
			BLC	4,735	1	0	1	91	5,085	1	0	2	98	5,116	1	0	1	98					
			LCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
			RCCO	4,600	1	0	2	88	4,940	1	0	2	95	4,971	1	0	2	96					
	700 mA	68 W	T1S	7,554	1	0	1	111	8,112	2	0	2	119	8,163	2	0	2	120	4,561	1	0	1	67
			T2S	7,789	2	0	2	115	8,364	2	0	2	123	8,416	2	0	2	124	4,777	1	0	1	70
			T2M	7,610	1	0	2	112	8,172	2	0	2	120	8,223	2	0	2	121	4,622	1	0	2	68
			T3S	7,601	1	0	2	112	8,162	2	0	2	120	8,213	2	0	2	121	4,724	1	0	1	69
			T3M	7,670	1	0	2	113	8,236	2	0	2	121	8,288	2	0	2	122	4,701	1	0	2	69
			T4M	7,774	1	0	2	114	8,348	2	0	2	123	8,400	2	0	2	124	4,709	1	0	2	69
			TFTM	7,658	1	0	2	113	8,223	1	0	2	121	8,275	1	0	2	122	4,638	1	0	2	68
			TSVS	8,090	2	0	0	119	8,687	3	0	1	128	8,742	3	0	1	129	4,922	2	0	0	72
			T5S	8,150	2	0	0	120	8,751	3	0	0	129	8,806	3	0	0	130	4,863	2	0	0	72
			T5M	8,164	3	0	1	120	8,767	3	0	2	129	8,821	3	0	2	130	4,924	3	0	1	72
			TSW	8,044	3	0	1	118	8,638	3	0	2	127	8,692	3	0	2	128	4,787	3	0	1	70
			BLC	6,028	1	0	2	89	6,473	1	0	2	95	6,514	1	0	2	96					
			LCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
			RCCO	5,856	1	0	2	86	6,289	1	0	2	92	6,328	1	0	2	93					
	1000 mA	105 W	T1S	10,331	2	0	2	98	11,094	2	0	2	106	11,163	2	0	2	106					
			T2S	10,652	2	0	2	101	11,438	2	0	2	109	11,510	2	0	2	110					
			T2M	10,408	2	0	2	99	11,176	2	0	3	106	11,246	2	0	3	107					
			T3S	10,395	2	0	2	99	11,163	2	0	2	106	11,233	2	0	2	107					
			T3M	10,490	2	0	2	100	11,264	2	0	2	107	11,335	2	0	2	108					
			T4M	10,632	2	0	2	101	11,417	2	0	2	109	11,488	2	0	2	109					
			TFTM	10,473	2	0	2	100	11,247	2	0	3	107	11,317	2	0	3	108					
			TSVS	11,064	3	0	1	105	11,881	3	0	1	113	11,955	3	0	1	114					
			T5S	11,145	3	0	1	106	11,968	3	0	1	114	12,043	3	0	1	115					
			T5M	11,165	3	0	2	106	11,989	4	0	2	114	12,064	4	0	2	115					
			TSW	11,001	3	0	2	105	11,813	4	0	2	113	11,887	4	0	2	113					
			BLC	7,960	1	0	2	76	8,548	1	0	2	81	8,601	1	0	2	82					
			LCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					
			RCCO	7,734	1	0	2	74	8,305	1	0	2	79	8,357	1	0	2	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40C (40 LEDs)	530 mA	68 W	T1S	7,861	1	0	1	116	8,441	2	0	2	124	8,494	2	0	2	125	4,794	1	0	1	71
			T2S	8,105	2	0	2	119	8,704	2	0	2	128	8,758	2	0	2	129	5,021	1	0	1	74
			T2M	7,920	2	0	2	116	8,504	2	0	2	125	8,557	2	0	2	126	4,858	1	0	2	71
			T3S	7,910	1	0	2	116	8,494	2	0	2	125	8,547	2	0	2	126	4,966	1	0	1	73
			T3M	7,982	2	0	2	117	8,571	2	0	2	126	8,625	2	0	2	127	4,941	1	0	2	73
			T4M	8,090	1	0	2	119	8,687	2	0	2	128	8,741	2	0	2	129	4,950	1	0	2	73
			TFTM	7,969	1	0	2	117	8,558	2	0	2	126	8,611	2	0	2	127	4,875	1	0	2	72
			TSVS	8,419	2	0	0	124	9,040	3	0	1	133	9,097	3	0	1	134	5,174	2	0	0	76
			T5S	8,481	2	0	0	125	9,107	3	0	1	134	9,164	3	0	1	135	5,111	2	0	0	75
			T5M	8,496	3	0	1	125	9,123	3	0	2	134	9,180	3	0	2	135	5,175	3	0	1	76
			TSW	8,371	3	0	2	123	8,989	3	0	2	132	9,045	3	0	2	133	5,031	3	0	1	74
			BLC	6,255	1	0	2	92	6,717	1	0	2	99	6,759	1	0	2	99					
			LCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
			RCCO	6,077	1	0	2	89	6,526	1	0	2	96	6,566	1	0	2	97					
	700 mA	91 W	T1S	9,984	2	0	2	112	10,721	2	0	2	120	10,788	2	0	2	121	6,014	1	0	1	68
			T2S	10,294	2	0	2	116	11,054	2	0	2	124	11,123	2	0	2	125	6,299	2	0	2	71
			T2M	10,059	2	0	2	113	10,801	2	0	3	121	10,869	2	0	3	122	6,094	2	0	2	68
			T3S	10,046	2	0	2	113	10,788	2	0	2	121	10,855	2	0	2	122	6,229	1	0	2	70
			T3M	10,137	2	0	2	114	10,886	2	0	2	122	10,954	2	0	2	123	6,198	2	0	2	70
			T4M	10,275	2	0	2	115	11,033	2	0	2	124	11,102	2	0	2	125	6,209	1	0	2	70
			TFTM	10,122	2	0	2	114	10,869	2	0	2	122	10,937	2	0	2	123	6,115	1	0	2	69
			TSVS	10,693	3	0	1	120	11,482	3	0	1	129	11,554	3	0	1	130	6,490	2	0	0	73
			T5S	10,771	3	0	1	121	11,566	3	0	1	130	11,639	3	0	1	131	6,411	2	0	0	72
			T5M	10,790	3	0	2	121	11,587	4	0	2	130	11,659	4	0	2	131	6,492	3	0	1	73
			TSW	10,632	3	0	2	119	11,417	4	0	2	128	11,488	4	0	2	129	6,311	3	0	2	71
			BLC	7,963	1	0	2	89	8,551	1	0	2	96	8,605	1	0	2	97					
			LCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
			RCCO	7,736	1	0	2	87	8,308	1	0	2	93	8,359	1	0	2	94					
	1000 mA	138 W	T1S	13,655	2	0	2	99	14,663	3	0	3	106	14,754	3	0	3	107					
			T2S	14,079	2	0	2	102	15,118	3	0	3	110	15,212	3	0	3	110					
			T2M	13,756	2	0	3	100	14,772	3	0	3	107	14,864	3	0	3	108					
			T3S	13,739	2	0	2	100	14,754	2	0	2	107	14,846	3	0	3	108					
			T3M	13,864	2	0	2	100	14,888	3	0	3	108	14,981	3	0	3	109					
			T4M	14,052	2	0	2	102	15,090	3	0	3	109	15,184	3	0	3	110					
			TFTM	13,842	2	0	3	100	14,864	2	0	3	108	14,957	2	0	3	108					
			TSVS	14,623	3	0	1	106	15,703	4	0	1	114	15,801	4	0	1	115					
			T5S	14,731	3	0	1	107	15,818	3	0	1	115	15,917	3	0	1	115					
			T5M	14,757	4	0	2	107	15,846	4	0	2	115	15,945	4	0	2	116					
			TSW	14,540	4	0	2	105	15,614	4	0	2	113	15,711	4	0	2	114					
			BLC	10,516	1	0	2	76	11,292	1	0	2	82	11,363	1	0	2	82					
			LCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					
			RCCO	10,216	2	0	3	74	10,971	2	0	3	80	11,039	2	0	3	80					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

L90 and R90 Rotated Optics

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60C (60 LEDs)	530 mA	99 W	T1S	11,569	2	0	2	117	12,423	2	0	2	125	12,501	2	0	2	126	7,167	2	0	2	72
			T2S	11,928	2	0	2	120	12,809	3	0	3	129	12,889	3	0	3	130	7,507	2	0	2	76
			T2M	11,655	2	0	2	118	12,516	2	0	3	126	12,594	2	0	3	127	7,263	2	0	2	73
			T3S	11,641	2	0	2	118	12,500	2	0	2	126	12,579	2	0	2	127	7,424	2	0	2	75
			T3M	11,747	2	0	2	119	12,614	2	0	2	127	12,693	2	0	2	128	7,387	2	0	2	75
			T4M	11,906	2	0	2	120	12,785	2	0	2	129	12,865	2	0	2	130	7,400	2	0	2	75
			TFTM	11,728	2	0	2	118	12,594	2	0	3	127	12,673	2	0	3	128	7,288	1	0	2	74
			TSVS	12,390	3	0	1	125	13,305	3	0	1	134	13,388	3	0	1	135	7,734	3	0	1	78
			T5S	12,481	3	0	1	126	13,402	3	0	1	135	13,486	3	0	1	136	7,641	3	0	0	77
			T5M	12,503	3	0	2	126	13,426	4	0	2	136	13,510	4	0	2	136	7,737	3	0	2	78
			TSW	12,320	4	0	2	124	13,229	4	0	2	134	13,312	4	0	2	134	7,522	3	0	2	76
			BLC	9,212	1	0	2	93	9,892	1	0	2	100	9,954	1	0	2	101					
			LCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
			RCCO	8,950	1	0	2	90	9,611	2	0	2	97	9,671	2	0	2	98					
	700 mA	131 W	T1S	14,694	2	0	2	112	15,779	3	0	3	120	15,877	3	0	3	121	8,952	2	0	2	68
			T2S	15,150	3	0	3	116	16,269	3	0	3	124	16,370	3	0	3	125	9,377	2	0	2	72
			T2M	14,803	2	0	3	113	15,896	3	0	3	121	15,995	3	0	3	122	9,072	2	0	2	69
			T3S	14,785	2	0	2	113	15,877	3	0	3	121	15,976	3	0	3	122	9,273	2	0	2	71
			T3M	14,919	2	0	2	114	16,021	3	0	3	122	16,121	3	0	3	123	9,227	2	0	2	70
			T4M	15,122	2	0	2	115	16,238	3	0	3	124	16,340	3	0	3	125	9,243	2	0	2	71
			TFTM	14,896	2	0	3	114	15,996	2	0	3	122	16,096	2	0	3	123	9,103	2	0	2	69
			TSVS	15,736	3	0	1	120	16,898	4	0	1	129	17,004	4	0	1	130	9,661	3	0	1	74
			T5S	15,852	3	0	1	121	17,022	4	0	1	130	17,129	4	0	1	131	9,544	3	0	1	73
			T5M	15,880	4	0	2	121	17,052	4	0	2	130	17,159	4	0	2	131	9,665	3	0	2	74
			TSW	15,647	4	0	2	119	16,802	4	0	2	128	16,907	4	0	2	129	9,395	4	0	2	72
			BLC	11,728	1	0	2	90	12,594	1	0	2	96	12,672	3	0	3	97					
			LCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
			RCCO	11,394	2	0	3	87	12,235	2	0	3	93	12,311	2	0	3	94					
	1000 mA	209 W	T1S	20,095	3	0	3	96	21,579	3	0	3	103	21,714	3	0	3	104					
			T2S	20,720	3	0	3	99	22,249	3	0	3	106	22,388	3	0	3	107					
			T2M	20,245	3	0	3	97	21,740	3	0	3	104	21,876	3	0	3	105					
			T3S	20,220	3	0	3	97	21,713	3	0	3	104	21,849	3	0	3	105					
			T3M	20,404	3	0	3	98	21,910	3	0	4	105	22,047	3	0	4	105					
			T4M	20,681	3	0	3	99	22,207	3	0	4	106	22,346	3	0	4	107					
			TFTM	20,372	3	0	3	97	21,876	3	0	4	105	22,013	3	0	4	105					
			TSVS	21,521	4	0	1	103	23,110	4	0	1	111	23,254	4	0	1	111					
			T5S	21,679	4	0	1	104	23,280	4	0	1	111	23,425	4	0	1	112					
			T5M	21,717	4	0	2	104	23,321	5	0	3	112	23,466	5	0	3	112					
			TSW	21,399	4	0	3	102	22,979	5	0	3	110	23,122	5	0	3	111					
			BLC	15,487	2	0	2	74	16,630	2	0	2	80	16,734	2	0	3	80					
			LCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					
			RCCO	15,046	2	0	3	72	16,157	2	0	3	77	16,258	2	0	3	78					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) or optional 3000 K (70 minimum CRI) or 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of 30, 40 or 60 high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L99/100,000 hours at

25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV or 6kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block, tool-less entry, and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



FEATURES & SPECIFICATIONS

INTENDED USE — Square Straight Steel is a general purpose light pole for up to 39-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

CONSTRUCTION — **Pole Shaft:** The pole shaft is of uniform dimension and wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 55 KSI (11-gauge, .1196"), or 50 KSI (7-gauge, .1793"). Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly square in cross-section with flat sides, small corner radii and excellent torsional qualities. Available shaft widths are 4", 5" and 6".

Pole Top: A top cap is provided for all poles that will receive drilling patterns for side-mount luminaire arm assemblies or when ordered with PT option.

Handhole: A reinforced handhole with grounding provision is provided at 18" from the base. Positioning the handhole lower may not be possible and requires engineering review; consult Tech Support-Outdoor for further information. Every handhole includes a cover and cover attachment hardware. The handhole has a nominal dimension of 2.5" x 5".

Base Cover: A durable ABS plastic two-piece full base cover, finished to match the pole, is provided with each pole assembly. Additional base cover options are available upon request.

Anchor Base/ Bolts: Anchor base is fabricated from steel that meets ASTM A36 standards and can be altered to match existing foundations; consult factory for modifications. Anchor bolts are manufactured to ASTM F1554 Standards grade 55, (55 KSI minimum yield strength and tensile strength of 75-95 KSI). Top threaded portion (nominal 12") is hot-dipped galvanized per ASTM A-153.

HARDWARE — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

FINISH — Standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

WARRANTY — 1-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number	SSS 16 DM19AS DXDDB
Notes	Windsor School
Type	Pole For Fixture Types P1, P1-BC, P2, & P3



Anchor Base Poles

SSS

SQUARE STRAIGHT STEEL

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: SSS 20 5C DM19 DDB

SSS						
Series	Nominal fixture mounting height	Nominal shaft base size/wall thickness ¹	Mounting ²		Options	Finish ¹⁰
SSS	(See technical information table.)	(See technical information table.)	Tenon mounting PT Open top (includes top cap) T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) KAC/KAD/KSE/KSF/KVR/KVF Drill mounting³ DM19 1 at 90° DM28 2 at 180° DM28 PL 2 at 180° with one side plugged DM29 2 at 90° DM39 3 at 90° DM49 4 at 90° CSX/DSX/AERIS™/OMERO™ Drill mounting³ DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM39AS 3 at 90° DM49AS 4 at 90°	AERIS™ Suspend drill mounting^{3,4} DM19AST_ 1 at 90° DM28AST_ 2 at 180° DM29AST_ 2 at 90° DM39AST_ 3 at 90° DM49AST_ 4 at 90° OMERO™ Suspend drill mounting^{3,4} DM19MRT_ 1 at 90° DM28MRT_ 2 at 180° DM29MRT_ 2 at 90° DM39MRT_ 3 at 90° DM49MRT_ 4 at 90°	Shipped installed L/AB Less anchor bolts VD Vibration damper TP Tamper resistant handhole cover fasteners HAXy Horizontal arm bracket (1 fixture)^{5,6} FDLxy Festoon outlet less electrical⁵ CPL12/xy 1/2" coupling⁵ CPL34/xy 3/4" coupling⁵ CPL1/xy 1" coupling⁵ NPL12/xy 1/2" threaded nipple⁵ NPL34/xy 3/4" threaded nipple⁵ NPL1/xy 1" threaded nipple⁵ EHXy Extra handhole^{5,7} MAEX Match existing⁸ USPOM United States point of manufacture⁹ IC Interior coating¹⁰	Standard colors DDB Dark bronze DWH White DBL Black DMB Medium bronze DNA Natural aluminum Classic colors DSS Sandstone DGC Charcoal gray DTG Tennis green DBR Bright red DSB Steel blue Architectural Colors and Special Finishes¹¹ Galvanized, Paint over Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes available.

See footnotes next page.

SSS Square Straight Steel Poles

NOTES:

1. Wall thickness will be signified with a "C" (7 Gauge) or a "G" (11-gauge) in nomenclature. "C" - 0.1196" "G" - 0.1793.
2. PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, follow this example: DM28/T20. The combination includes a required extra handhole.
3. The drilling template pattern to be used for a particular luminaire depends on the luminaire that is used. Refer to the Technical Data Section of the Outdoor Binder for Drilling Templates.
Matrix with Generic Template Link at <http://www.acuitybrands.com/-/media/Files/Products/Resources/Tools-and-Documents/Pole%20Resources/Pole%20Anchorage/Matrix%20Document/AnchorBoltMatrix.pdf?la=en>

4. Insert "1" or "2" to designate fixture size; e.g. DM19AST2.
5. Specify location and orientation when ordering option.
For "x": Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".
Example: 5ft = 5 and 20ft, 3 in = 20-3
For "y": Specify orientation from handhole (A,B,C,D)
Refer to the Handhole Orientation diagram below.
Example: 1/2" coupling at 5' 8", orientation C:
SSS 20 5C DM19 CPL12/5-8BC DDB
6. Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D..
7. Combination of tenon-top and drill mount includes extra handhole.



8. Must add original order number of existing pole(s).
9. Use when mill certifications are required.
10. Provides enhanced corrosion resistance.
11. Additional colors available; see www.lithonia.com/archcolors or Architectural Colors brochure (Form No. 794.3). Available by formal quote only, consult factory for details.

TECHNICAL INFORMATION — EPA (ft²) WITH 3-SECOND GUST PER AASHTO 2013

Series	Mounting Height (ft)	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight
SSS	10	4C	20	500	16	400	13	325	10.5	263	8.5	213	7	175	6	150
SSS	12	4C	16	400	13	325	10	250	8	200	6.5	163	5	125	4	100
SSS	14	4C	13.5	338	10	250	7.5	188	6	150	4.5	113	3.5	88	2.5	63
SSS	16	4C	10.5	263	7.5	188	5.5	138	4	100	3	75	1.5	38	1	25
SSS	18	4C	8	200	5.5	138	4	100	2.5	63	1.5	38	0.5	13	-	-
SSS	20	4C	6	150	4	100	2.5	63	1	25	-	-	-	-	-	-
SSS	20	5C	10	250	7	175	4.5	113	2.5	63	1	25	-	-	-	-
SSS	20	5G	14	350	10	250	7	175	5	125	3	75	1.5	38	0.5	13
SSS	25	4C	2	50	0.5	13	-	-	-	-	-	-	-	-	-	-
SSS	25	4G	5.5	138	3	75	1.5	38	-	-	-	-	-	-	-	-
SSS	25	5C	4.5	113	2	50	-	-	-	-	-	-	-	-	-	-
SSS	25	5G	7.5	188	4.5	113	2	50	0.5	13	-	-	-	-	-	-
SSS	30	4G	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-
SSS	30	5C	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SSS	30	5G	2.5	63	-	-	-	-	-	-	-	-	-	-	-	-
SSS	30	6G	11	275	6	150	2.5	63	-	-	-	-	-	-	-	-
SSS	35	5G	-	-	-	-	-	-	-	-	-	-	-	-	-	-
SSS	35	6G	4	100	-	-	-	-	-	-	-	-	-	-	-	-
SSS	39	6G	-	-	-	-	-	-	-	-	-	-	-	-	-	-

AASHTO 2013 criteria is the most conservative existing EPA calculation. For poles not showing EPA values under AASHTO 2013, EPA values may exist under commercial criteria. Consult Outdoor Tech support to obtain these values.


BASE DETAIL

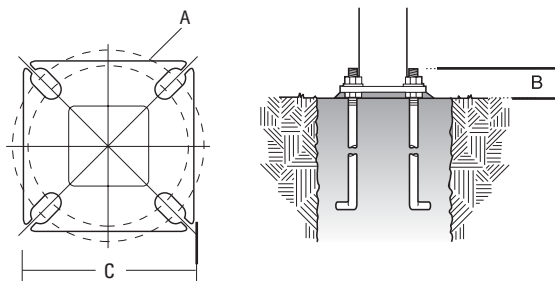

POLE DATA

Shaft base size	Bolt circle A	Bolt projection B	Base square C	Template description	Anchor bolt description	Anchor bolt and template number
4"C	8" - 9"	2-3/4"-4"	8"	ABTEMPLATE PJ50004	AB18-0	ABSSS-4C
4"G	8" - 9"	2-3/4"-4"	8"	ABTEMPLATE PJ50004	AB30-0	ABSSS-4G
5"	10" - 12"	3-3/8"-4"	11"	ABTEMPLATE PJ50010	AB36-0	ABSSS-5
6"	11" - 13"	3-3/8"-4"	12-1/2"	ABTEMPLATE PJ50011	AB36-0	N/A

HANDHOLE ORIENTATION



IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use Lithonia Lighting factory templates.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.

IMPORTANT:

• These specifications are intended for general purposes only. Lithonia reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.



D-Series Size 1 LED Wall Luminaire




d#series

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, ELCW)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	ELCW Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		

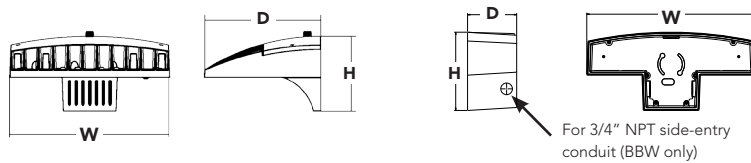

Catalog Number	DSXW1 LED 20C 350 50K T4M MVOLT PIR DDBXD
Notes	Windsor School
Type	W1

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DDBTXD

DSXW1 LED							
Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW1 LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines)	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A)	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted	T2S Type II Short T2M Type II Medium T3S Type III Short T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium ASYDF Asymmetric diffuse	MVOLT ¹ 120 ¹ 208 ¹ 240 ¹ 277 ¹ 347 ² 480 ²	Shipped included (blank) Surface mounting bracket BBW Surface-mounted back box (for conduit entry) ³	Shipped installed PE Photoelectric cell, button type ⁴ DMG 0-10V dimming driver (no controls) PIR 180° motion/ambient light sensor, <15' mtg ht ⁵ PIRH 180° motion/ambient light sensor, 15-30' mtg ht ⁵ PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ⁵ PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ⁵ ELCW Emergency battery backup (includes external component enclosure) ⁶

Other Options

Finish (required)

Shipped installed

SF	Single fuse (120, 277 or 347V) ⁷
DF	Double fuse (208, 240 or 480V) ⁷
HS	House-side shield ⁸
SPD	Separate surge protection ⁹

Shipped separately⁸

BSW	Bird-deterrent spikes
WG	Wire guard
VG	Vandal guard
DDL	Diffused drop lens

DDBXD	Dark bronze
DBLXD	Black
DNAXD	Natural aluminum
DWHXD	White

DSSXD	Sandstone
DDBTXD	Textured dark bronze
DBLBXD	Textured black
DNATXD	Textured natural aluminum

DWHGXD	Textured white
DSSTXD	Textured sandstone

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- PIR and PIR1FC3V specifies the [Sensor Switch SBGR-10-ODP](#) control; PIRH specifies the [Sensor Switch SBGR-6-ODP](#) control; see [Motion Sensor Guide](#) for details. Includes ambient light sensor. Not available with "PE" option (button type photocell). Dimming driver standard. Not available with 20 LED/1000 mA configuration (DSXW1 LED 20C 1000).
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at www.lithonia.com
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option. Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- See the electrical section on page 3 for more details.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBER				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
(10 LEDs)	350mA	14W	T2S	1,415	0	0	1	101	1,520	0	0	1	109	1,529	0	0	1	109	894	0	0	1	64
			T2M	1,349	0	0	1	96	1,449	0	0	1	104	1,458	0	0	1	104	852	0	0	1	61
			T3S	1,400	0	0	1	100	1,503	0	0	1	107	1,512	0	0	1	108	884	0	0	1	63
			T3M	1,386	0	0	1	99	1,488	0	0	1	106	1,497	0	0	1	107	876	0	0	1	63
			T4M	1,358	0	0	1	97	1,458	0	0	1	104	1,467	0	0	1	105	858	0	0	1	61
			TFTM	1,411	0	0	1	101	1,515	0	0	1	108	1,525	0	0	1	109	892	0	0	1	64
			ASYDF	1,262	0	0	1	90	1,355	1	0	1	97	1,363	1	0	1	97	797	0	0	1	57
	530 mA	20W	T2S	2,054	1	0	1	103	2,205	1	0	1	110	2,219	1	0	1	111	1,264	0	0	1	63
			T2M	1,957	1	0	1	98	2,102	1	0	1	105	2,115	1	0	1	106	1,205	0	0	1	60
			T3S	2,031	0	0	1	102	2,181	0	0	1	109	2,195	0	0	1	110	1,250	0	0	1	63
			T3M	2,010	1	0	1	101	2,159	1	0	1	108	2,172	1	0	1	109	1,237	0	0	1	62
			T4M	1,970	1	0	1	99	2,115	1	0	1	106	2,128	0	0	1	106	1,212	0	0	1	61
			TFTM	2,047	0	0	1	102	2,198	0	0	1	110	2,212	0	0	1	111	1,260	0	0	1	63
			ASYDF	1,830	1	0	1	92	1,966	1	0	1	98	1,978	1	0	1	99	1,127	0	0	1	56
	700 mA	27W	T2S	2,623	1	0	1	97	2,816	1	0	1	104	2,834	1	0	1	105	1,544	0	0	1	57
			T2M	2,499	1	0	1	93	2,684	1	0	1	99	2,701	1	0	1	100	1,472	0	0	1	55
			T3S	2,593	1	0	1	96	2,785	1	0	1	103	2,802	1	0	1	104	1,527	0	0	1	57
			T3M	2,567	1	0	1	95	2,757	1	0	1	102	2,774	1	0	1	103	1,512	0	0	1	56
			T4M	2,515	1	0	1	93	2,701	1	0	1	100	2,718	1	0	1	101	1,481	0	0	1	55
			TFTM	2,614	1	0	1	97	2,807	1	0	1	104	2,825	1	0	1	105	1,539	0	0	1	57
			ASYDF	2,337	1	0	1	87	2,510	1	0	1	93	2,526	1	0	1	94	1,376	0	0	1	51
	1000 mA	40W	T2S	3,685	1	0	1	92	3,957	1	0	1	99	3,982	1	0	1	100	2,235	1	0	1	58
			T2M	3,512	1	0	1	88	3,771	1	0	1	94	3,795	1	0	1	95	2,130	1	0	2	55
			T3S	3,644	1	0	1	91	3,913	1	0	1	98	3,938	1	0	1	98	2,210	1	0	2	57
			T3M	3,607	1	0	1	90	3,874	1	0	1	97	3,898	1	0	1	97	2,187	1	0	2	56
			T4M	3,534	1	0	1	88	3,795	1	0	1	95	3,819	1	0	1	95	2,143	1	0	2	55
			TFTM	3,674	1	0	1	92	3,945	1	0	1	99	3,969	1	0	1	99	2,228	1	0	2	57
			ASYDF	3,284	1	0	1	82	3,527	1	0	1	88	3,549	1	0	1	89	1,991	1	0	2	51
(20 LEDs)	350mA	24W	T2S	2,820	1	0	1	118	3,028	1	0	1	126	3,047	1	0	1	127	1,777	1	0	1	74
			T2M	2,688	1	0	1	112	2,886	1	0	1	120	2,904	1	0	1	121	1,693	1	0	1	71
			T3S	2,789	1	0	1	116	2,995	1	0	2	125	3,013	1	0	2	126	1,757	0	0	1	73
			T3M	2,761	1	0	1	115	2,964	1	0	2	124	2,983	1	0	2	124	1,739	1	0	1	72
			T4M	2,705	1	0	1	113	2,904	1	0	2	121	2,922	1	0	2	122	1,704	1	0	1	71
			TFTM	2,811	1	0	1	117	3,019	1	0	2	126	3,038	1	0	2	127	1,771	0	0	1	74
			ASYDF	2,513	1	0	1	105	2,699	1	0	2	112	2,716	1	0	2	113	1,584	1	0	1	66
	530 mA	36W	T2S	4,079	1	0	1	113	4,380	1	0	1	122	4,408	1	0	1	122	2,504	1	0	1	70
			T2M	3,887	1	0	1	108	4,174	1	0	1	116	4,200	1	0	1	117	2,387	1	0	1	66
			T3S	4,034	1	0	1	112	4,332	1	0	1	120	4,359	1	0	1	121	2,477	1	0	1	69
			T3M	3,993	1	0	1	111	4,288	1	0	1	119	4,315	1	0	1	120	2,451	1	0	2	68
			T4M	3,912	1	0	2	109	4,201	1	0	2	117	4,227	1	0	1	117	2,402	1	0	1	67
			TFTM	4,066	1	0	1	113	4,367	1	0	1	121	4,394	1	0	1	122	2,496	1	0	1	69
			ASYDF	3,635	1	0	2	101	3,904	1	0	2	108	3,928	1	0	2	109	2,232	1	0	1	62
	700 mA	47W	T2S	5,188	1	0	1	110	5,571	1	0	1	119	5,606	1	0	1	119	3,065	1	0	1	65
			T2M	4,945	1	0	1	105	5,310	1	0	1	113	5,343	1	0	1	114	2,921	1	0	1	62
			T3S	5,131	1	0	1	109	5,510	1	0	2	117	5,544	1	0	2	118	3,031	1	0	1	64
			T3M	5,079	1	0	2	108	5,454	1	0	2	116	5,488	1	0	2	117	3,000	1	0	1	64
			T4M	4,976	1	0	2	106	5,343	1	0	2	114	5,377	1	0	2	114	2,939	1	0	1	63
			TFTM	5,172	1	0	2	110	5,554	1	0	2	118	5,589	1	0	2	119	3,055	1	0	1	65
			ASYDF	4,624	1	0	2	98	4,966	1	0	2	106	4,997	1	0	2	106	2,732	1	0	1	58
	1000 mA	74W	T2S	7,205	1	0	1	97	7,736	1	0	1	105	7,785	1	0	1	105	4,429	1	0	1	61
			T2M	6,866	1	0	2	93	7,373	1	0	2	100	7,419	1	0	2	100	4,221	1	0	2	58
			T3S	7,124	1	0	2	96	7,650	1	0	2	103	7,698	1	0	2	104	4,380	1	0	2	60
			T3M	7,052	1	0	2	95	7,736	1	0	2	105	7,620	1	0	2	103	4,335	1	0	2	59
			T4M	6,910	1	0	2	93	7,420	1	0	2	100	7,466	1	0	2	101	4,248	1	0	2	58
			TFTM	7,182	1	0	2	97	7,712	1	0	2	104	7,760	1	0	2	105	4,415	1	0	2	60
			ASYDF	6,421	1	0	2	87	6,895	2	0	2	93	6,938	2	0	2	94	3,947	1	0	2	54

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW1 LED 20C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88


Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17


Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

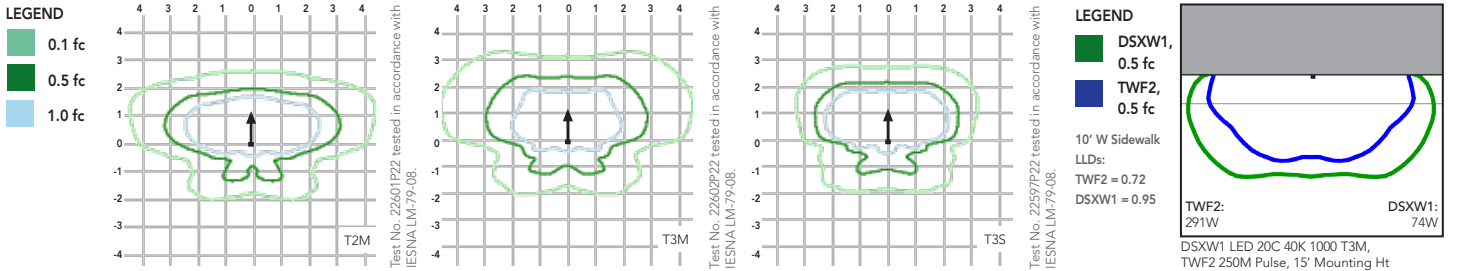

Options and Accessories

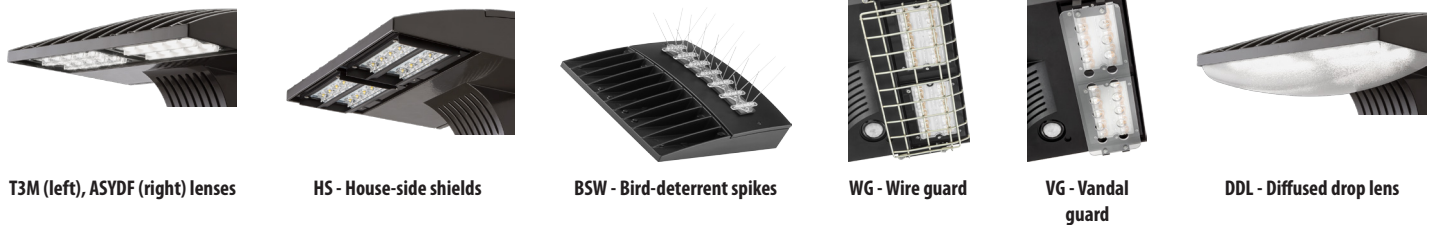

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a

power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





D-Series Size 1 LED Wall Luminaire




d#series

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, ELCW)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	ELCW Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		

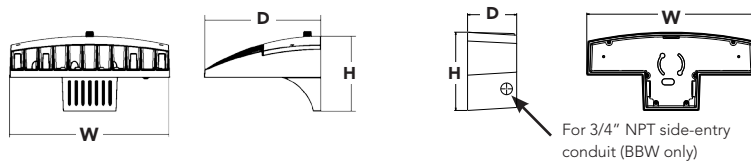

Catalog Number **DSXW1 LED 20C 700 50K T4M MVOLT PIRH DDBXD**

Notes
Windsor School

Type
W2

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DDBTXD

DSXW1 LED							
Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW1 LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines)	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A)	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted	T2S Type II Short T2M Type II Medium T3S Type III Short T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium ASYDF Asymmetric diffuse	MVOLT ¹ 120 ¹ 208 ¹ 240 ¹ 277 ¹ 347 ² 480 ²	Shipped included (blank) Surface mounting bracket BBW Surface-mounted back box (for conduit entry) ³	Shipped installed PE Photoelectric cell, button type ⁴ DMG 0-10V dimming driver (no controls) PIR 180° motion/ambient light sensor, <15' mtg ht ⁵ PIRH 180° motion/ambient light sensor, 15-30' mtg ht ⁵ PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ⁵ PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ⁵ ELCW Emergency battery backup (includes external component enclosure) ⁶

Other Options

Finish (required)

Shipped installed

SF	Single fuse (120, 277 or 347V) ⁷
DF	Double fuse (208, 240 or 480V) ⁷
HS	House-side shield ⁸
SPD	Separate surge protection ⁹

Shipped separately ⁸

BSW	Bird-deterrent spikes
WG	Wire guard
VG	Vandal guard
DDL	Diffused drop lens

DDBXD	Dark bronze
DBLXD	Black
DNAXD	Natural aluminum
DWHXD	White

DSSXD	Sandstone
DDBTXD	Textured dark bronze
DBLBXD	Textured black
DNATXD	Textured natural aluminum

DWHGXD	Textured white
DSSTXD	Textured sandstone

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- PIR and PIR1FC3V specifies the [Sensor Switch SBGR-10-ODP](#) control; PIRH specifies the [Sensor Switch SBGR-6-ODP](#) control; see [Motion Sensor Guide](#) for details. Includes ambient light sensor. Not available with "PE" option (button type photocell). Dimming driver standard. Not available with 20 LED/1000 mA configuration (DSXW1 LED 20C 1000).
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at www.lithonia.com
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option. Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- See the electrical section on page 3 for more details.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.279.8041 • www.lithonia.com
© 2013-2016 Acuity Brands Lighting, Inc. All rights reserved.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBER				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
(10 LEDs)	350mA	14W	T2S	1,415	0	0	1	101	1,520	0	0	1	109	1,529	0	0	1	109	894	0	0	1	64
			T2M	1,349	0	0	1	96	1,449	0	0	1	104	1,458	0	0	1	104	852	0	0	1	61
			T3S	1,400	0	0	1	100	1,503	0	0	1	107	1,512	0	0	1	108	884	0	0	1	63
			T3M	1,386	0	0	1	99	1,488	0	0	1	106	1,497	0	0	1	107	876	0	0	1	63
			T4M	1,358	0	0	1	97	1,458	0	0	1	104	1,467	0	0	1	105	858	0	0	1	61
			TFTM	1,411	0	0	1	101	1,515	0	0	1	108	1,525	0	0	1	109	892	0	0	1	64
			ASYDF	1,262	0	0	1	90	1,355	1	0	1	97	1,363	1	0	1	97	797	0	0	1	57
	530 mA	20W	T2S	2,054	1	0	1	103	2,205	1	0	1	110	2,219	1	0	1	111	1,264	0	0	1	63
			T2M	1,957	1	0	1	98	2,102	1	0	1	105	2,115	1	0	1	106	1,205	0	0	1	60
			T3S	2,031	0	0	1	102	2,181	0	0	1	109	2,195	0	0	1	110	1,250	0	0	1	63
			T3M	2,010	1	0	1	101	2,159	1	0	1	108	2,172	1	0	1	109	1,237	0	0	1	62
			T4M	1,970	1	0	1	99	2,115	1	0	1	106	2,128	0	0	1	106	1,212	0	0	1	61
			TFTM	2,047	0	0	1	102	2,198	0	0	1	110	2,212	0	0	1	111	1,260	0	0	1	63
			ASYDF	1,830	1	0	1	92	1,966	1	0	1	98	1,978	1	0	1	99	1,127	0	0	1	56
	700 mA	27W	T2S	2,623	1	0	1	97	2,816	1	0	1	104	2,834	1	0	1	105	1,544	0	0	1	57
			T2M	2,499	1	0	1	93	2,684	1	0	1	99	2,701	1	0	1	100	1,472	0	0	1	55
			T3S	2,593	1	0	1	96	2,785	1	0	1	103	2,802	1	0	1	104	1,527	0	0	1	57
			T3M	2,567	1	0	1	95	2,757	1	0	1	102	2,774	1	0	1	103	1,512	0	0	1	56
			T4M	2,515	1	0	1	93	2,701	1	0	1	100	2,718	1	0	1	101	1,481	0	0	1	55
			TFTM	2,614	1	0	1	97	2,807	1	0	1	104	2,825	1	0	1	105	1,539	0	0	1	57
			ASYDF	2,337	1	0	1	87	2,510	1	0	1	93	2,526	1	0	1	94	1,376	0	0	1	51
	1000 mA	40W	T2S	3,685	1	0	1	92	3,957	1	0	1	99	3,982	1	0	1	100	2,235	1	0	1	58
			T2M	3,512	1	0	1	88	3,771	1	0	1	94	3,795	1	0	1	95	2,130	1	0	2	55
			T3S	3,644	1	0	1	91	3,913	1	0	1	98	3,938	1	0	1	98	2,210	1	0	2	57
			T3M	3,607	1	0	1	90	3,874	1	0	1	97	3,898	1	0	1	97	2,187	1	0	2	56
			T4M	3,534	1	0	1	88	3,795	1	0	1	95	3,819	1	0	1	95	2,143	1	0	2	55
			TFTM	3,674	1	0	1	92	3,945	1	0	1	99	3,969	1	0	1	99	2,228	1	0	2	57
			ASYDF	3,284	1	0	1	82	3,527	1	0	1	88	3,549	1	0	1	89	1,991	1	0	2	51
(20 LEDs)	350mA	24W	T2S	2,820	1	0	1	118	3,028	1	0	1	126	3,047	1	0	1	127	1,777	1	0	1	74
			T2M	2,688	1	0	1	112	2,886	1	0	1	120	2,904	1	0	1	121	1,693	1	0	1	71
			T3S	2,789	1	0	1	116	2,995	1	0	2	125	3,013	1	0	2	126	1,757	0	0	1	73
			T3M	2,761	1	0	1	115	2,964	1	0	2	124	2,983	1	0	2	124	1,739	1	0	1	72
			T4M	2,705	1	0	1	113	2,904	1	0	2	121	2,922	1	0	2	122	1,704	1	0	1	71
			TFTM	2,811	1	0	1	117	3,019	1	0	2	126	3,038	1	0	2	127	1,771	0	0	1	74
			ASYDF	2,513	1	0	1	105	2,699	1	0	2	112	2,716	1	0	2	113	1,584	1	0	1	66
	530 mA	36W	T2S	4,079	1	0	1	113	4,380	1	0	1	122	4,408	1	0	1	122	2,504	1	0	1	70
			T2M	3,887	1	0	1	108	4,174	1	0	1	116	4,200	1	0	1	117	2,387	1	0	1	66
			T3S	4,034	1	0	1	112	4,332	1	0	1	120	4,359	1	0	1	121	2,477	1	0	1	69
			T3M	3,993	1	0	1	111	4,288	1	0	1	119	4,315	1	0	1	120	2,451	1	0	2	68
			T4M	3,912	1	0	2	109	4,201	1	0	2	117	4,227	1	0	1	117	2,402	1	0	1	67
			TFTM	4,066	1	0	1	113	4,367	1	0	1	121	4,394	1	0	1	122	2,496	1	0	1	69
			ASYDF	3,635	1	0	2	101	3,904	1	0	2	108	3,928	1	0	2	109	2,232	1	0	1	62
	700 mA	47W	T2S	5,188	1	0	1	110	5,571	1	0	1	119	5,606	1	0	1	119	3,065	1	0	1	65
			T2M	4,945	1	0	1	105	5,310	1	0	1	113	5,343	1	0	1	114	2,921	1	0	1	62
			T3S	5,131	1	0	1	109	5,510	1	0	2	117	5,544	1	0	2	118	3,031	1	0	1	64
			T3M	5,079	1	0	2	108	5,454	1	0	2	116	5,488	1	0	2	117	3,000	1	0	1	64
			T4M	4,976	1	0	2	106	5,343	1	0	2	114	5,377	1	0	2	114	2,939	1	0	1	63
			TFTM	5,172	1	0	2	110	5,554	1	0	2	118	5,589	1	0	2	119	3,055	1	0	1	65
			ASYDF	4,624	1	0	2	98	4,966	1	0	2	106	4,997	1	0	2	106	2,732	1	0	1	58
	1000 mA	74W	T2S	7,205	1	0	1	97	7,736	1	0	1	105	7,785	1	0	1	105	4,429	1	0	1	61
			T2M	6,866	1	0	2	93	7,373	1	0	2	100	7,419	1	0	2	100	4,221	1	0	2	58
			T3S	7,124	1	0	2	96	7,650	1	0	2	103	7,698	1	0	2	104	4,380	1	0	2	60
			T3M	7,052	1	0	2	95	7,736	1	0	2	105	7,620	1	0	2	103	4,335	1	0	2	59
			T4M	6,910	1	0	2	93	7,420	1	0	2	100	7,466	1	0	2	101	4,248	1	0	2	58
			TFTM	7,182	1	0	2	97	7,712	1	0	2	104	7,760	1	0	2	105	4,415	1	0	2	60
			ASYDF	6,421	1	0	2	87	6,895	2	0	2	93	6,938	2	0	2	94	3,947	1	0	2	54

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW1 LED 20C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88


Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17


Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

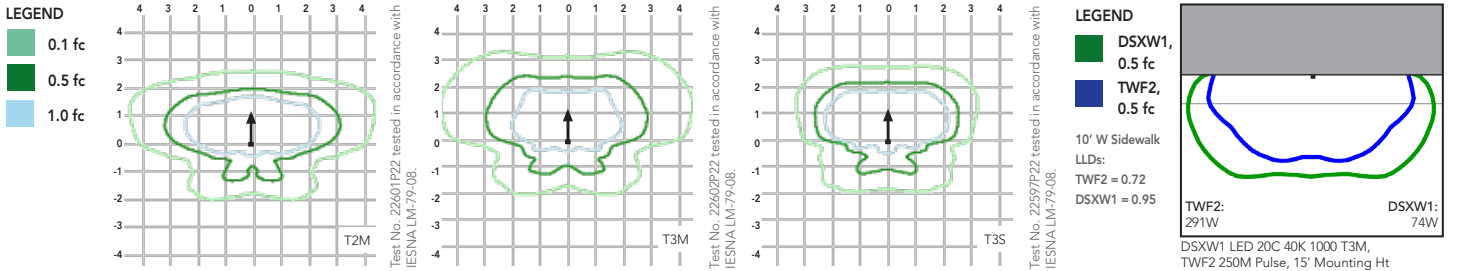

Options and Accessories

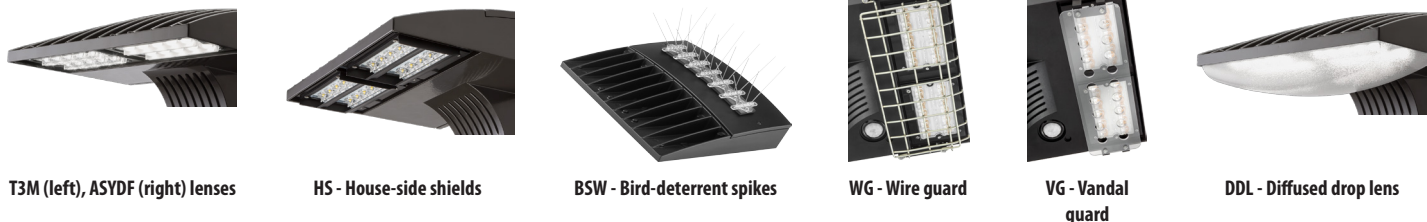

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a

power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





d-series

D-Series Size 2 LED Flood Luminaire



Catalog Number **DSXF2 LED P2 50K MVOLT IS DDBXD FRWB DDBXD**


Notes **Windsor School**

Type **W3**

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

EPA:	0.8 ft ² (0.05 m ²)
Depth:	3-1/8" (8.0 cm)
Width:	12-7/8" (32.6 cm)
Height:	7-3/4" (19.8 cm)
Overall Height	12" (30.5 cm)
Weight:	10.5 lbs (4.8 kg)

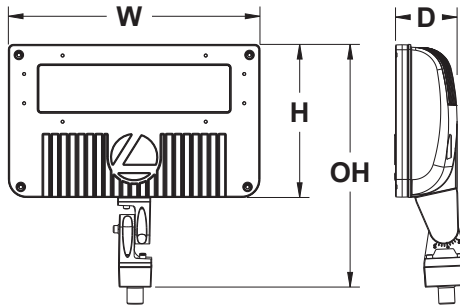

Introduction

The D-Series Size 2 Flood features precision optics to beautifully illuminate a variety of applications as its sleek, compact styling blends seamlessly with its environment.

The D-Series Flood reflector systems and cutting-edge chip-on-board LED technology produce excellent uniformity combined with precision beam patterns for minimal spill light and incredible photometric performance. It's the ideal long-life replacement for 150 - 250W metal halide floods, with typical energy savings of 70% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSXF2 LED P1 40K MSP MVOLT THK DDBXD

DSXF2 LED							
Series	Performance Package	Color Temperature	Distribution	Voltage	Mounting	Options	Finish (required)
DSXF2 LED	P1 P2 P3 ^{1,2,3}	30K 3000K 40K 4000K 50K 5000K	NSP Narrow spot MSP Medium spot MFL Medium flood FL Flood WFL Wide flood WFR Wide flood, rectangular HMF Horizontal flood	MVOLT ⁴ 120 ⁴ 208 ⁴ 240 ⁴ 277 ⁴ 347 480 ⁵ HVOLT	Shipped included THK Knuckle with 1/2"NPS threaded pipe YKC62 Yoke with 16-3 SO cord IS Integral slipfitter (fits 2-3/8" O.D. tenon) Shipped separately⁶ DSXF1/2TS Tenon slipfitter (2-3/8" O.D. THK required) FTS CG6 Tenon slipfitter (2-7/8" O.D. YKC62 required)	Shipped installed PE Photocontrol, button style ^{7,8} PEX Photocontrol external threaded adjustable ⁸ DMG 0-10V dimming driver (no controls) SF Single fuse (120, 277, 347V) ⁹ DF Double fuse (208, 240, 480V) ¹⁰ SPD10KV Separate surge protection ¹¹ Shipped separately⁶ UBV Upper/bottom visor (universal) FV Full visor VG Vandal guard	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White

Accessories

Ordered and shipped separately.

DSXF1/2TS DDBXD U	Slipfitter for 1-1/4" to 2-3/8" OD tenons; mates with 1/2" threaded knuckle (specify finish)
FTS CG6 DDBXD U	Slipfitter for 2-3/8" to 2-7/8" OD tenons; mates with yoke mount (specify finish)
FRWB DDBXD U	Radius wall bracket, 2-3/8" OD tenon (specify finish)
FSPB DDBXD U	Steel square pole bracket, 2-3/8" OD tenon (specify finish)
DSXF2UBV DDBXD U	Upper/bottom visor accessory (specify finish)
DSXF2FV DDBXD U	Full visor accessory (specify finish)
DSXF2VG U	Vandal guard accessory

For more mounting options, visit our [Floodlighting Accessories](#) pages.

Stock configurations are offered for shorter lead times:

Standard Part Number	Stock Part Number
DSXF2 LED P1 50K WFL MVOLT THK DDBXD	DSXF2 LED P1 50K
DSXF2 LED P2 50K WFL MVOLT THK DDBXD	DSXF2 LED P2 50K

NOTES

- Performance package P3 rated 35C maximum ambient.
- Not available with PE (use PEX).
- Rated 25C maximum ambient with SPD10KV.
- MVOLT driver operates on line voltage from 120-277V. Specify specific voltage when ordering with fusing (SF, DF) or photocontrol (PE, PEX).
- Not available with PE and PEX.
- Also available as accessories; see accessories information at left.
- Rated 25C maximum ambient for performance package P2. Not available in performance package P3. Specify PEX for higher ambient temperatures.
- Photocontrol (PE, PEX) requires 120, 208, 240, 277 or 347 voltage option.
- Must specify 120, 277 or 347 voltage option.
- Must specify 208, 240 or 480 voltage option.
- Cannot exceed 25°C maximum ambient when used with P3 performance package.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	Field Angle		Beam Angle		30K (3000K, 70 CRI)			40K (4000K, 70 CRI)			50K (5000K, 70 CRI)		
			°H	°V	°H	°V	Max Cd	Lumens	LPW	Max Cd	Lumens	LPW	Max Cd	Lumens	LPW
P1	54W	NSP	39	39	19	18	43,427	7,338	136	45,662	7,715	143	45,662	7,715	143
		MSP	52	51	28	28	26,563	7,010	130	27,930	7,371	137	27,930	7,371	137
		MFL	59	59	45	46	11,831	7,058	131	12,440	7,421	137	12,440	7,421	137
		FL	87	87	62	68	6,258	7,309	135	6,581	7,686	142	6,581	7,686	142
		WFL	114	101	87	83	3,991	7,413	137	4,197	7,794	144	4,197	7,794	144
		WFR	107	92	81	71	4,827	7,429	138	5,076	7,811	145	5,076	7,811	145
		HMF	123	64	89	50	6,580	6,765	125	6,919	7,113	132	6,919	7,113	132
P2	78W	NSP	39	39	19	18	59,506	10,054	129	62,568	10,572	136	62,568	10,572	136
		MSP	52	51	28	28	36,397	9,606	123	38,271	10,100	129	38,271	10,100	129
		MFL	59	59	45	46	16,211	9,671	124	17,046	10,169	130	17,046	10,169	130
		FL	87	87	62	68	8,575	10,017	128	9,017	10,532	135	9,017	10,532	135
		WFL	114	101	87	83	5,469	10,157	130	5,751	10,680	137	5,751	10,680	137
		WFR	107	92	81	71	6,615	10,179	131	6,955	10,703	137	6,955	10,701	137
		HMF	123	64	89	50	9,017	9,269	119	9,481	9,746	125	9,481	9,746	125
P3	102W	NSP	39	39	19	18	70,481	11,909	117	74,109	12,522	123	74,109	12,522	123
		MSP	52	51	28	28	43,111	11,377	112	45,330	11,963	117	45,330	11,963	117
		MFL	59	59	45	46	19,011	11,342	111	20,190	12,045	118	20,190	12,049	118
		FL	87	87	62	68	10,157	11,864	116	10,680	12,474	122	10,680	12,475	122
		WFL	114	101	87	83	6,198	11,510	113	6,811	12,650	124	6,811	12,650	124
		WFR	107	92	81	71	7,835	12,056	118	8,238	12,677	124	8,238	12,677	124
		HMF	123	64	89	50	10,680	10,979	108	11,230	11,544	113	11,230	11,544	113

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	
0°C	32°F
10°C	50°F
20°C	68°F
25°C	77°F
30°C	86°F
40°C	104°F

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXF LED P3 platform noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.95	0.95

Electrical Load


Light Engines	System Watts*	Current (A)					
		120	208	240	277	347	480
P1	54W	0.45	0.26	0.23	0.2	0.16	0.13
P2	78W	0.65	0.37	0.33	0.29	0.23	0.18
P3	102W	0.88	0.49	0.43	0.39	0.31	0.23

* Systems Watts for 347-480V; P1: 56W, P2: 80W, P3:103W.

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Flood Size 2 homepage](#).

Isocandela plots for the DSXF2 LED P2 40K.

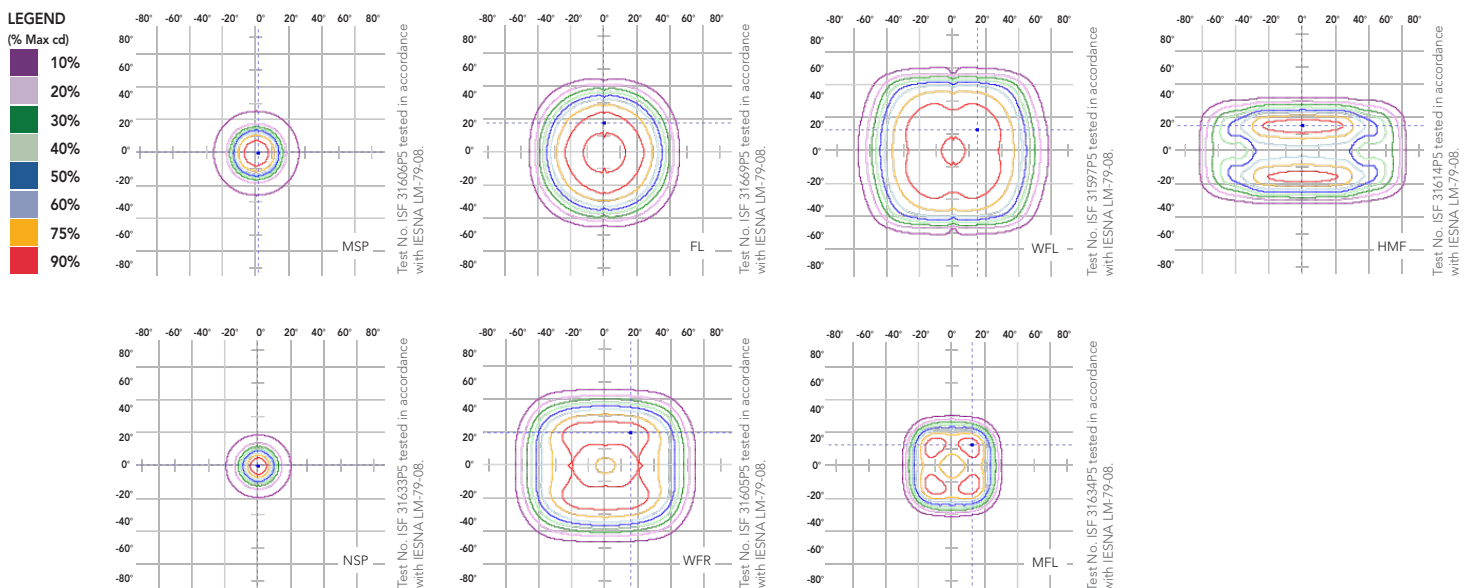

Mounting, Options and Accessories



**THK - Knuckle with
1/2" NPS threaded pipe**



YKC62 - Yoke with 50 cord
W= 4-3/4" (12.0 cm)
H= 4-1/4" (10.7 cm)
D= 2-1/4" (5.7 cm)



IS - Integral slipfitter
H= 2-1/2" (6.3 cm)
ID= 2-3/8" (6.0 cm)
OD= 3-1/2" (8.8 cm)



UBV - Upper/bottom visor
W= 10" (25.4 cm)
H= 2-1/2" (6.3 cm)
D= 3" (7.6 cm)



FV - Full visor
W= 10" (25.4 cm)
H= 2-1/2" (6.3 cm)
D= 3" (7.6 cm)



VG - Vandal guard
W= 10-1/2" (26.6 cm)
H= 4" (10.1 cm)

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 2 Flood reflects the embedded high performance LED technology. It is ideal for larger signage, facade and flagpole lighting in many commercial and residential applications.

CONSTRUCTION

Die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants using a tempered glass lens (IP66). Low EPA (0.8 ft²) for optimized wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

OPTICS

A variety of precision-molded vacuum-metallized specular reflectors are engineered for superior target illumination, uniformity and spacing. Light engines are available in 3000K (70 CRI min.), 4000K (70 CRI min.) or 5000K (70 CRI min.) configurations. Optional visors offer additional versatility.

ELECTRICAL

Light engine(s) consist of chip-on-board (COB) LEDs directly coupled to the housing to maximize heat dissipation and promote long life (100,000 hrs, L80). Class 1 electronic driver has a power factor >90%, THD <20%, and has an expected life of 100,000 hours with <1% failure rate. Standard 6KV surge protection meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Integral adjustable knuckle with 1/2-14 NPS threaded pipe, tenon slipfitter, or yoke mounting, facilitates quick and easy installation to a variety of mounting accessories. This secure connection enables the D-Series Size 2 to withstand up to a 1.5 G vibration load rating per ANSI C136.31.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



D-Series Size 1 LED Wall Luminaire




d#series

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, ELCW)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	ELCW Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		

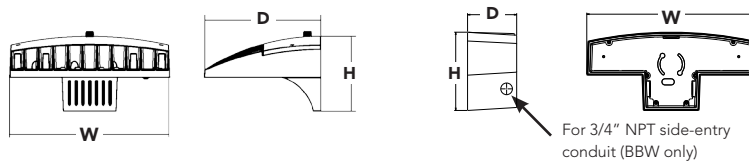

Catalog Number **DSXW1 LED 10C 350 50K T2S MVOLT PIR DD BXD**

Notes **Windsor School**

Type **W4**

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DDBTXD

DSXW1 LED							
Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW1 LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines)	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A)	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted	T2S Type II Short T2M Type II Medium T3S Type III Short T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium ASYDF Asymmetric diffuse	MVOLT ¹ 120 ¹ 208 ¹ 240 ¹ 277 ¹ 347 ² 480 ²	Shipped included (blank) Surface mounting bracket BBW Surface-mounted back box (for conduit entry) ³	Shipped installed PE Photoelectric cell, button type ⁴ DMG 0-10V dimming driver (no controls) PIR 180° motion/ambient light sensor, <15' mtg ht ⁵ PIRH 180° motion/ambient light sensor, 15-30' mtg ht ⁵ PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ⁵ PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ⁵ ELCW Emergency battery backup (includes external component enclosure) ⁶

Other Options

Finish (required)

Shipped installed

SF	Single fuse (120, 277 or 347V) ⁷
DF	Double fuse (208, 240 or 480V) ⁷
HS	House-side shield ⁸
SPD	Separate surge protection ⁹

Shipped separately ⁸

BSW	Bird-deterrent spikes
WG	Wire guard
VG	Vandal guard
DDL	Diffused drop lens

DDBXD	Dark bronze
DBLXD	Black
DNAXD	Natural aluminum
DWHXD	White

DSSXD	Sandstone
DDBTXD	Textured dark bronze
DBLBXD	Textured black
DNATXD	Textured natural aluminum

DWHGXD	Textured white
DSSTXD	Textured sandstone

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- PIR and PIR1FC3V specifies the [Sensor Switch SBGR-10-ODP](#) control; PIRH specifies the [Sensor Switch SBGR-6-ODP](#) control; see [Motion Sensor Guide](#) for details. Includes ambient light sensor. Not available with "PE" option (button type photocell). Dimming driver standard. Not available with 20 LED/1000 mA configuration (DSXW1 LED 20C 1000).
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at www.lithonia.com
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option. Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- See the electrical section on page 3 for more details.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBER				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
(10 LEDs)	350mA	14W	T2S	1,415	0	0	1	101	1,520	0	0	1	109	1,529	0	0	1	109	894	0	0	1	64
			T2M	1,349	0	0	1	96	1,449	0	0	1	104	1,458	0	0	1	104	852	0	0	1	61
			T3S	1,400	0	0	1	100	1,503	0	0	1	107	1,512	0	0	1	108	884	0	0	1	63
			T3M	1,386	0	0	1	99	1,488	0	0	1	106	1,497	0	0	1	107	876	0	0	1	63
			T4M	1,358	0	0	1	97	1,458	0	0	1	104	1,467	0	0	1	105	858	0	0	1	61
			TFTM	1,411	0	0	1	101	1,515	0	0	1	108	1,525	0	0	1	109	892	0	0	1	64
			ASYDF	1,262	0	0	1	90	1,355	1	0	1	97	1,363	1	0	1	97	797	0	0	1	57
	530 mA	20W	T2S	2,054	1	0	1	103	2,205	1	0	1	110	2,219	1	0	1	111	1,264	0	0	1	63
			T2M	1,957	1	0	1	98	2,102	1	0	1	105	2,115	1	0	1	106	1,205	0	0	1	60
			T3S	2,031	0	0	1	102	2,181	0	0	1	109	2,195	0	0	1	110	1,250	0	0	1	63
			T3M	2,010	1	0	1	101	2,159	1	0	1	108	2,172	1	0	1	109	1,237	0	0	1	62
			T4M	1,970	1	0	1	99	2,115	1	0	1	106	2,128	0	0	1	106	1,212	0	0	1	61
			TFTM	2,047	0	0	1	102	2,198	0	0	1	110	2,212	0	0	1	111	1,260	0	0	1	63
			ASYDF	1,830	1	0	1	92	1,966	1	0	1	98	1,978	1	0	1	99	1,127	0	0	1	56
	700 mA	27W	T2S	2,623	1	0	1	97	2,816	1	0	1	104	2,834	1	0	1	105	1,544	0	0	1	57
			T2M	2,499	1	0	1	93	2,684	1	0	1	99	2,701	1	0	1	100	1,472	0	0	1	55
			T3S	2,593	1	0	1	96	2,785	1	0	1	103	2,802	1	0	1	104	1,527	0	0	1	57
			T3M	2,567	1	0	1	95	2,757	1	0	1	102	2,774	1	0	1	103	1,512	0	0	1	56
			T4M	2,515	1	0	1	93	2,701	1	0	1	100	2,718	1	0	1	101	1,481	0	0	1	55
			TFTM	2,614	1	0	1	97	2,807	1	0	1	104	2,825	1	0	1	105	1,539	0	0	1	57
			ASYDF	2,337	1	0	1	87	2,510	1	0	1	93	2,526	1	0	1	94	1,376	0	0	1	51
	1000 mA	40W	T2S	3,685	1	0	1	92	3,957	1	0	1	99	3,982	1	0	1	100	2,235	1	0	1	58
			T2M	3,512	1	0	1	88	3,771	1	0	1	94	3,795	1	0	1	95	2,130	1	0	2	55
			T3S	3,644	1	0	1	91	3,913	1	0	1	98	3,938	1	0	1	98	2,210	1	0	2	57
			T3M	3,607	1	0	1	90	3,874	1	0	1	97	3,898	1	0	1	97	2,187	1	0	2	56
			T4M	3,534	1	0	1	88	3,795	1	0	1	95	3,819	1	0	1	95	2,143	1	0	2	55
			TFTM	3,674	1	0	1	92	3,945	1	0	1	99	3,969	1	0	1	99	2,228	1	0	2	57
			ASYDF	3,284	1	0	1	82	3,527	1	0	1	88	3,549	1	0	1	89	1,991	1	0	2	51
(20 LEDs)	350mA	24W	T2S	2,820	1	0	1	118	3,028	1	0	1	126	3,047	1	0	1	127	1,777	1	0	1	74
			T2M	2,688	1	0	1	112	2,886	1	0	1	120	2,904	1	0	1	121	1,693	1	0	1	71
			T3S	2,789	1	0	1	116	2,995	1	0	2	125	3,013	1	0	2	126	1,757	0	0	1	73
			T3M	2,761	1	0	1	115	2,964	1	0	2	124	2,983	1	0	2	124	1,739	1	0	1	72
			T4M	2,705	1	0	1	113	2,904	1	0	2	121	2,922	1	0	2	122	1,704	1	0	1	71
			TFTM	2,811	1	0	1	117	3,019	1	0	2	126	3,038	1	0	2	127	1,771	0	0	1	74
			ASYDF	2,513	1	0	1	105	2,699	1	0	2	112	2,716	1	0	2	113	1,584	1	0	1	66
	530 mA	36W	T2S	4,079	1	0	1	113	4,380	1	0	1	122	4,408	1	0	1	122	2,504	1	0	1	70
			T2M	3,887	1	0	1	108	4,174	1	0	1	116	4,200	1	0	1	117	2,387	1	0	1	66
			T3S	4,034	1	0	1	112	4,332	1	0	1	120	4,359	1	0	1	121	2,477	1	0	1	69
			T3M	3,993	1	0	1	111	4,288	1	0	1	119	4,315	1	0	1	120	2,451	1	0	2	68
			T4M	3,912	1	0	2	109	4,201	1	0	2	117	4,227	1	0	1	117	2,402	1	0	1	67
			TFTM	4,066	1	0	1	113	4,367	1	0	1	121	4,394	1	0	1	122	2,496	1	0	1	69
			ASYDF	3,635	1	0	2	101	3,904	1	0	2	108	3,928	1	0	2	109	2,232	1	0	1	62
	700 mA	47W	T2S	5,188	1	0	1	110	5,571	1	0	1	119	5,606	1	0	1	119	3,065	1	0	1	65
			T2M	4,945	1	0	1	105	5,310	1	0	1	113	5,343	1	0	1	114	2,921	1	0	1	62
			T3S	5,131	1	0	1	109	5,510	1	0	2	117	5,544	1	0	2	118	3,031	1	0	1	64
			T3M	5,079	1	0	2	108	5,454	1	0	2	116	5,488	1	0	2	117	3,000	1	0	1	64
			T4M	4,976	1	0	2	106	5,343	1	0	2	114	5,377	1	0	2	114	2,939	1	0	1	63
			TFTM	5,172	1	0	2	110	5,554	1	0	2	118	5,589	1	0	2	119	3,055	1	0	1	65
			ASYDF	4,624	1	0	2	98	4,966	1	0	2	106	4,997	1	0	2	106	2,732	1	0	1	58
	1000 mA	74W	T2S	7,205	1	0	1	97	7,736	1	0	1	105	7,785	1	0	1	105	4,429	1	0	1	61
			T2M	6,866	1	0	2	93	7,373	1	0	2	100	7,419	1	0	2	100	4,221	1	0	2	58
			T3S	7,124	1	0	2	96	7,650	1	0	2	103	7,698	1	0	2	104	4,380	1	0	2	60
			T3M	7,052	1	0	2	95	7,736	1	0	2	105	7,620	1	0	2	103	4,335	1	0	2	59
			T4M	6,910	1	0	2	93	7,420	1	0	2	100	7,466	1	0	2	101	4,248	1	0	2	58
			TFTM	7,182	1	0	2	97	7,712	1	0	2	104	7,760	1	0	2	105	4,415	1	0	2	60
			ASYDF	6,421	1	0	2	87	6,895	2	0	2	93	6,938	2	0	2	94	3,947	1	0	2	54

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW1 LED 20C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88


Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17


Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

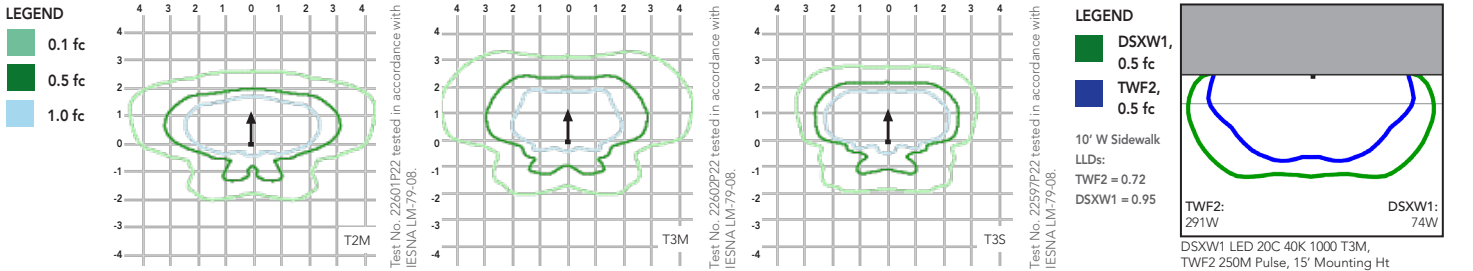

Options and Accessories

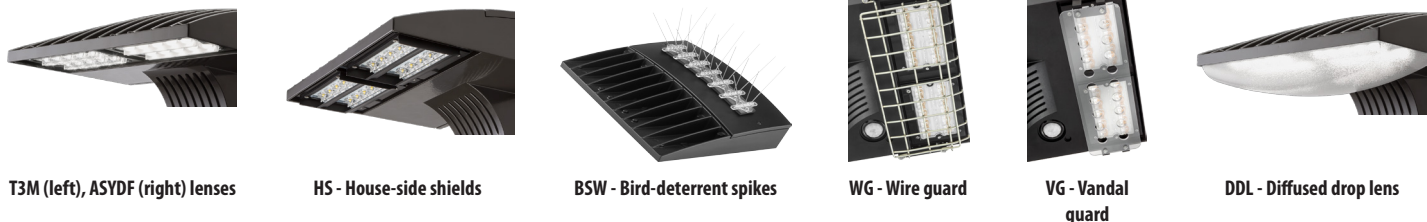

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a

power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

